
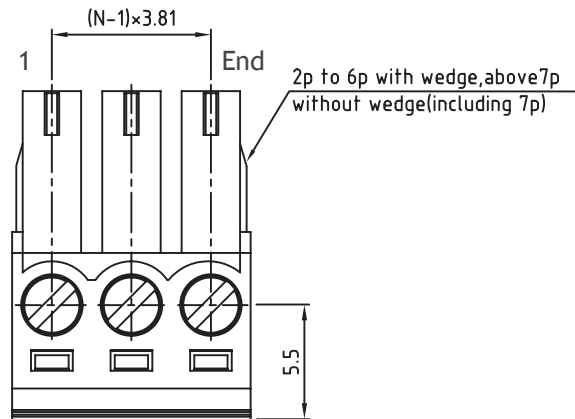
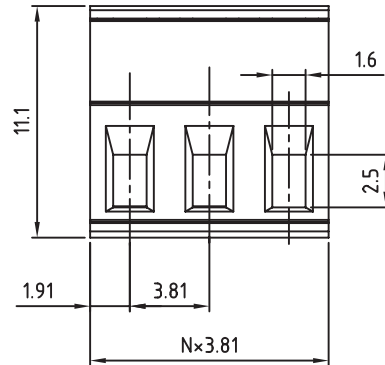


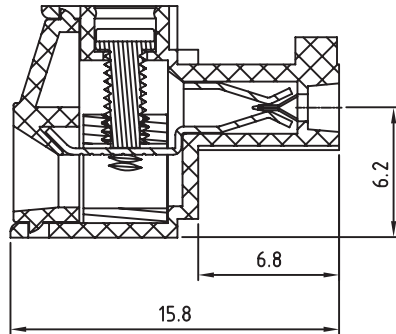

TECHNICAL CHARACTERISTICS

MATERIAL

INSULATOR: PA 66

FLAMABILITY RATING: UL94-V0

COLOR: GREEN

METAL HOUSING: BRASS (CuZn)

TERMINAL SCREW: STEEL ZINC PLATING "-" SLOT TYPE

WIRE GUARD: PhBz TIN PLATED

ENVIRONMENTAL

OPERATING TEMPERATURE: -40 UP TO 105°C

COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL

CURRENT RATING:

cULus

VDE

10A

10.5A

WORKING VOLTAGE:

300VAC

300VAC

WITHSTANDING VOLTAGE:

1.6KV

2.5KV

CONTACT RESISTANCE:

20 mOhm MAX

STANDARD

 CERTIFIED E315414

 CERTIFIED 40023195

MECHANICAL

SOLID WIRE:

26-16 AWG / 0.129-1.31 MM²

STRANDED WIRE:

26-16 AWG / 0.129-1.31 MM²

TORQUE:

3.0 Lb.In / 0.34 Nm

WIRE STRIPE LENGTH: 6-7 MM

SCREW: M2


PITCH: 3.81 MM

PACKAGING

BOX

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X = ± 0.2

.XX = ± 0.15



APPROVAL: FBr

UNIT: MM

SCALE:

SHEET: 1/2

DRAW: MARVIN

DESCRIPTION: SERIE 361 - 3.81MM VERTICAL CABLE ENTRY PLUG
- WR-TBL

WERI PART NO: 691 361 300 0xx

SIZE

A4

1				2				3				4				5				
Cautions and Warnings: This electronic component is designed and developed with the intention for use in general electronics equipments. Before incorporating the components into any equipments in the field such as aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required or if there is possibility of direct damage or injury to human body, Würth Elektronik must be asked for a written approval. In addition, even electronic component in general electronic equipments, when used in electrical circuits that require high safety, reliability functions or performance, the sufficient reliability evaluation-check for the safety must be performed before by the user before usage.																	A			
																	B			
																	C			
																	D			
RoHS Compliant								PROJECTION:				GENERAL TOLERANCE								
G								.X = +/- 0.2 .XX = +/- 0.15												
F																				
E																				
D																				
C				APPROVAL: JC				UNIT: MM				DESCRIPTION: DISCLAIMER				SIZE				
B								SCALE:				WERI PART NO: DISCLAIMER				A4				
A	10-SEP-14	PDF	QL																	
REV	DATE	FILE	BY																	
								DRAW: QL												

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Wurth Elektronik:](#)

[691361300016](#)