

CRYSTEK
MICROWAVE
A DIVISION OF CRYSTEK CORPORATION

Low Pass Filter
50Ω SMA
7th Order




Part Number: CLPFL-0200

Low Pass Range
DC to 200 MHz



Schematic

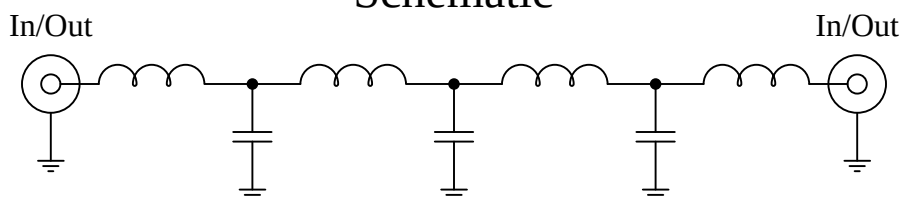

Features:


- 7th Order Butterworth Response
- 50Ω SMA Connectors

Applications:

- Test Equipment
- Lab Use

Maximum Ratings:

- +36dBm (4 Watts)
- Operating Temperature: -40°C to 85°C
- Storage Temperature: -55°C to 100°C

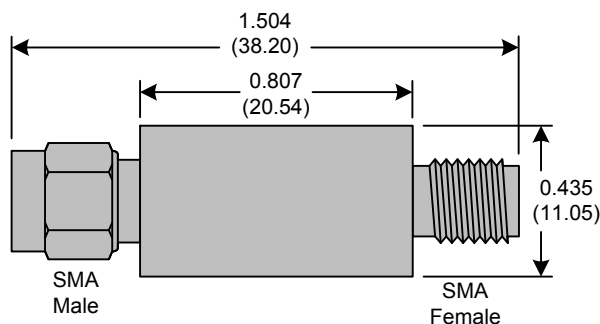

Crystek's new line of Low Pass Filters are designed in a rugged SMA housing. This filter line has excellent out-of-band rejection. Designed for Test Equipment and General Lab Use.


Rev D

Page 1 of 3




CRYSTEK
CORPORATION


12730 COMMONWEALTH DRIVE • FORT MYERS, FLORIDA 33913
PHONE: 239-561-3311 • 800-237-3061
FAX: 239-561-1025 • WWW.CRYSTEK.COM




200 MHz Insertion Loss

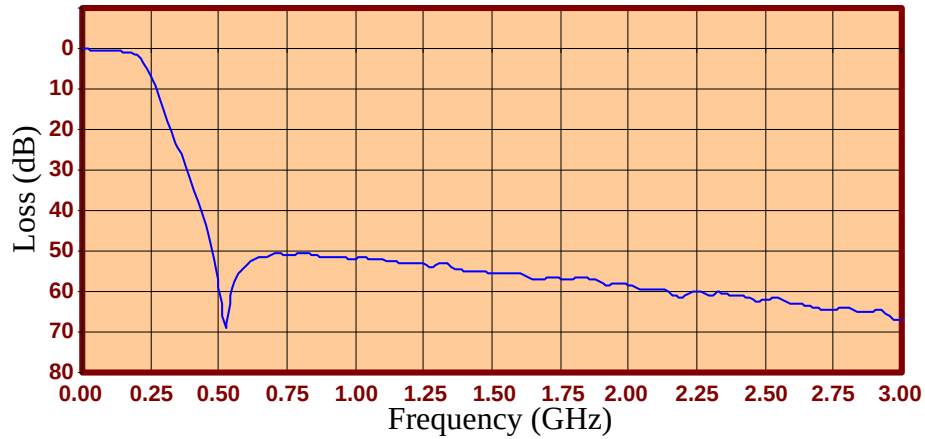


Male Side Return Loss

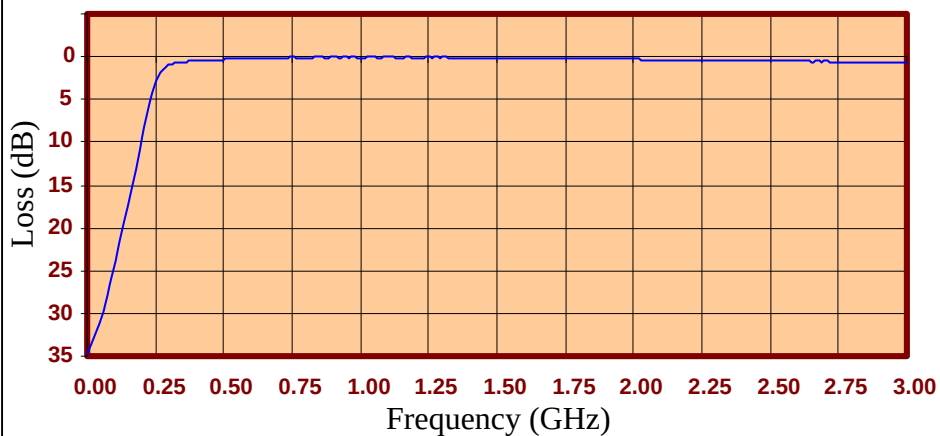

Female Side Return Loss

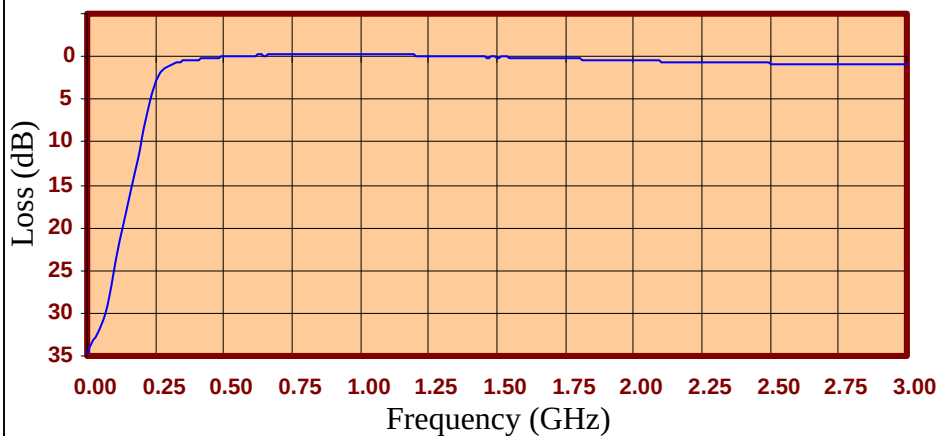



FREQ (MHz)	INSERTION LOSS (dB)	Male Return Loss (dB)	Female Return Loss (dB)
0.3	0.17	34.76	34.73
15.3	0.18	33.64	33.68
30.3	0.29	32.51	32.76
45.3	0.31	31.32	31.93
60.3	0.33	29.88	30.73
75.3	0.40	27.89	28.98
90.3	0.43	25.88	26.64
105	0.52	23.79	23.99
120	0.58	21.51	21.55
135	0.65	19.49	19.42
150	0.79	17.42	17.27
165	0.96	15.37	15.18
180	1.24	13.16	12.98
195	1.64	10.77	10.76
210	2.20	8.36	8.32
225	3.34	6.07	6.15
240	4.84	4.20	4.21
255	6.81	2.78	2.85
270	9.22	1.83	1.97
285	11.99	1.30	1.38
300	15.02	0.97	1.10
330	20.69	0.71	0.72
405	35.02	0.48	0.37
450	43.65	0.38	0.22
510	64.73	0.31	0.03
585	54.39	0.26	-0.08
705	50.72	0.14	-0.18
810	50.43	0.13	-0.24
900	51.74	0.08	-0.23
1005	51.95	0.10	-0.21
1245	53.22	0.08	-0.07
1500	55.48	0.13	0.12
1755	56.84	0.25	0.31
1995	58.36	0.28	0.46
2250	59.91	0.41	0.65
2505	62.19	0.49	0.81
2745	64.49	0.61	0.90
3000	67.04	0.67	1.01

Product Control:

Crystek Part Number:	CLPFL-0200	Release Date:	03-Aug-2015
Revision Level:	D	Responsible:	K. Piotrowicz

Rev D

Page 3 of 3



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Crystek:](#)

[CLPFL-0200](#)