


Nov.1.2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

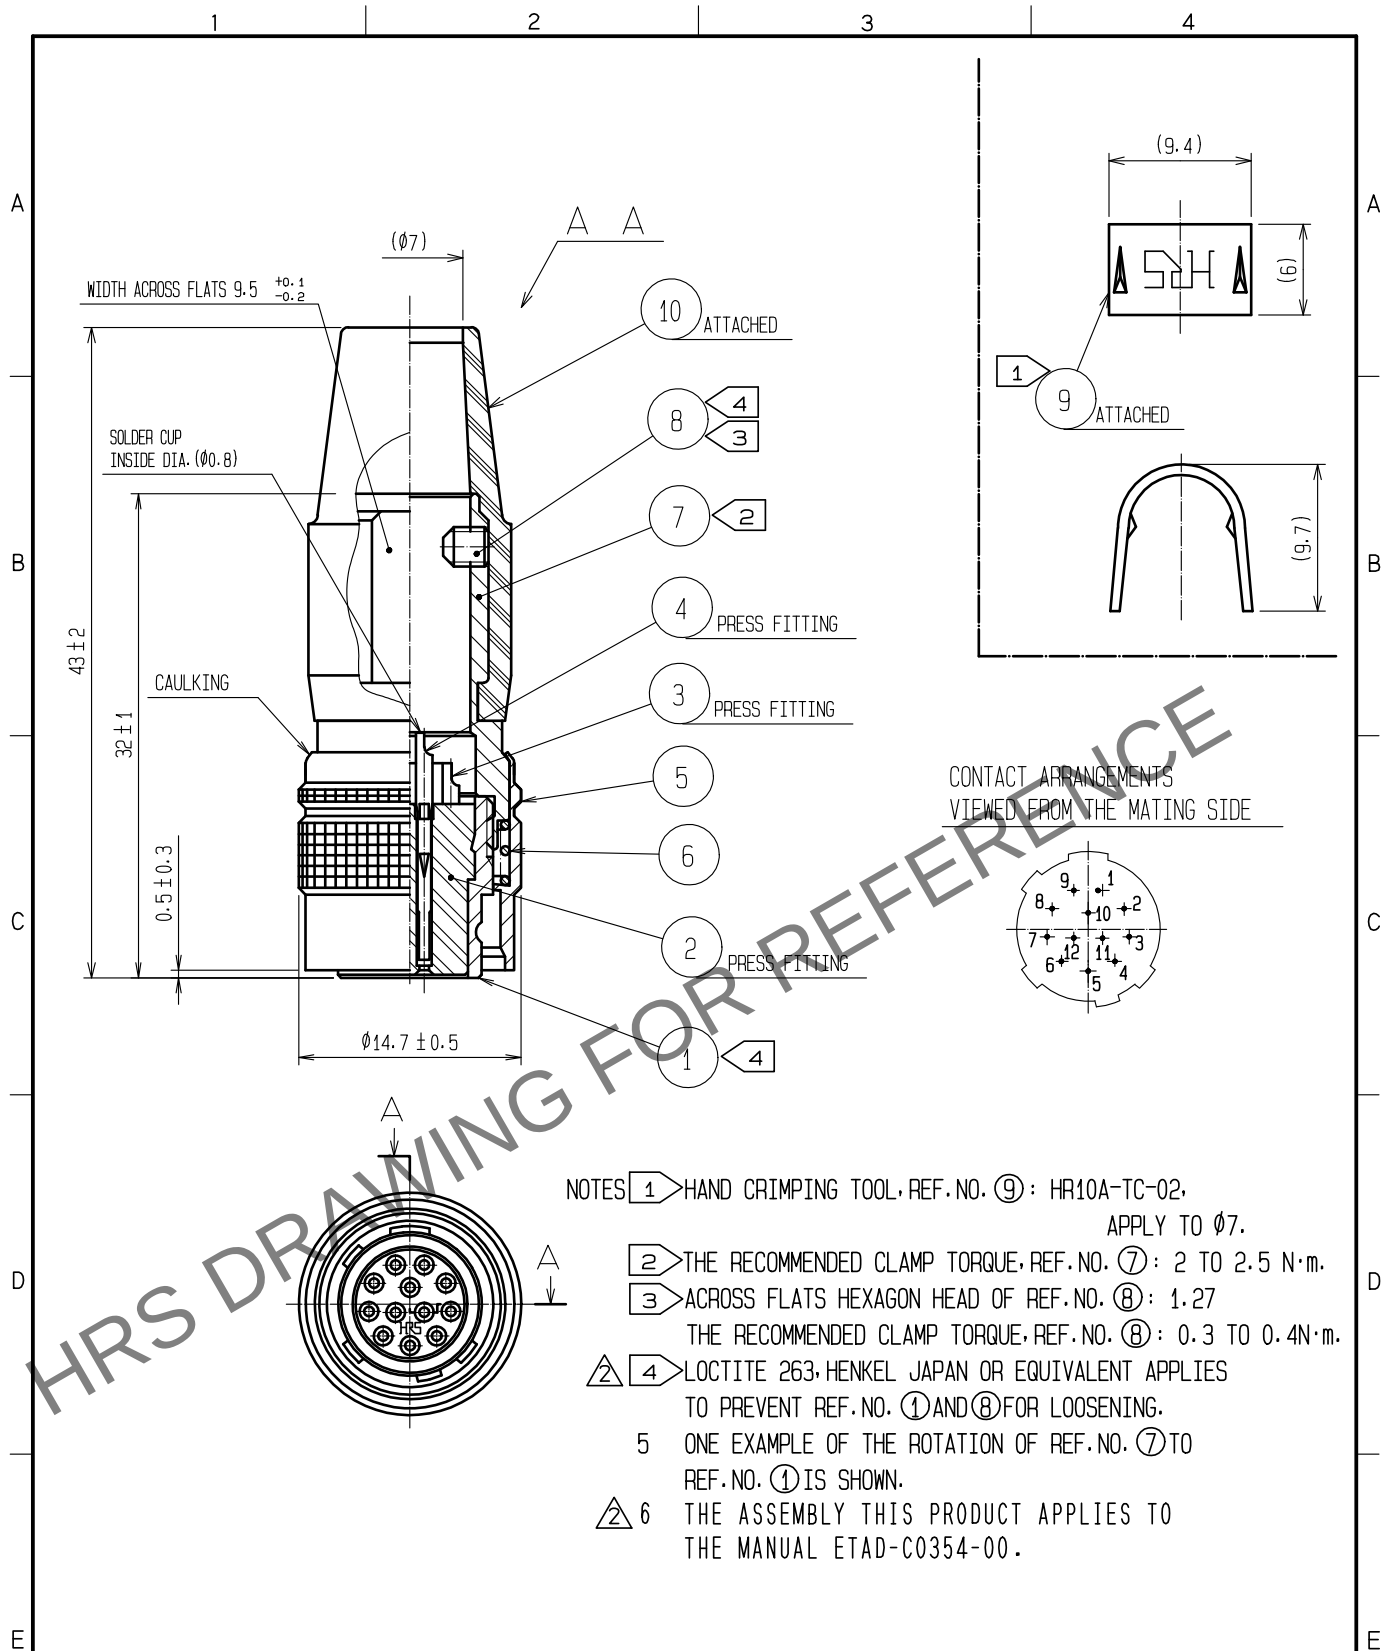

- NOTES
- ① HAND CRIMPING TOOL, REF. NO. ⑨ : HR10A-TC-02, APPLY TO Ø7.
 - ② THE RECOMMENDED CLAMP TORQUE, REF. NO. ⑦ : 2 TO 2.5 N·m.
 - ③ ACROSS FLATS HEXAGON HEAD OF REF. NO. ⑧ : 1.27 THE RECOMMENDED CLAMP TORQUE, REF. NO. ⑧ : 0.3 TO 0.4 N·m.
 - ④ LOCTITE 263, HENKEL JAPAN OR EQUIVALENT APPLIES TO PREVENT REF. NO. ① AND ⑧ FOR LOOSENING.
 - ⑤ ONE EXAMPLE OF THE ROTATION OF REF. NO. ⑦ TO REF. NO. ④ IS SHOWN.
 - ⑥ THE ASSEMBLY THIS PRODUCT APPLIES TO THE MANUAL ETAD-C0354-00.

5	BRASS	MATTE FINISH NICKEL PLATING	10	CR	(BLACK)
4	PHOSPHOR BRONZE	GOLD PLATING 0.2μm min.	9	BRASS	
3	PHOSPHOR BRONZE	NICKEL UNDER PLATING 2μm min.	8	STEEL	NICKEL PLATING JIS C 1177, HEXAGON SOCKET SET SCREW M2.6X0.45X3
2	POLYAMIDE	(BLACK) UL94V-0	7	BRASS	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATING	6	STEEL	NICKEL PLATING
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
		2 : 1		2	DIS-C-00016953	HT. ZENBA	EJ. KUNII	20240220

HIROSE ELECTRIC CO., LTD.	APPROVED	MR. YOSHIDA	20050105	DRAWING NO.	EDC4-020552-74	
	CHECKED	MO. SATOH	20050105	PART NO.	HR10A-10P-12S(74)	
	DESIGNED	YH. YAMADA	20050105	CODE NO.	CL0110-0402-0-74	
	DRAWN	YH. YAMADA	20050105			1/1