

# **Crimpers and Wire Prep Tools**

Electrical/Electronic, CATV/Satellite, Voice/Data/Video, Automotive, Wire Rope, Industrial




(No Model.)

# W. A. BERNARD. COMBINED PLIERS AND CUTTER.

No. 479,113.

Patented July 19, 1892.

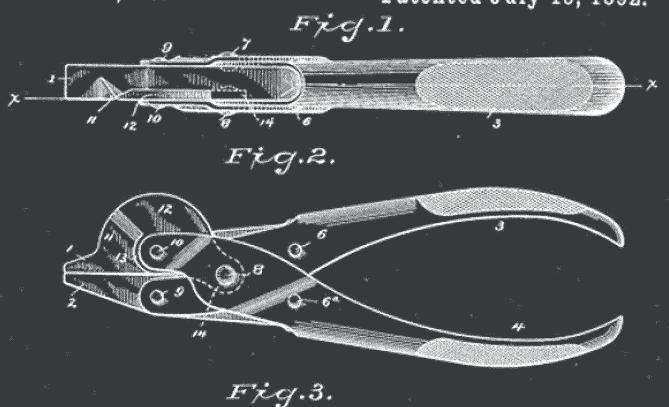

Sargent Tools traces its origin to the William Schollhorn Co., New Haven, Connecticut, USA in 1870. W. A. Bernard sold his patent for combined pliers and cutters to the William Schollhorn Co. in the 1890s. That began a tradition of designing and manufacturing the nest specialty hand tools for tradesmen throughout the world. That tradition continues with Oetiker Tool Corp. and a complete line of tools for electronic, CATV, voice, data, video, automotive aftermarket, wire rope and industrial applications.

# **Table of Contents**

ELECTRICAL   ELECTRONIC	4
POWER CRIMP TOOLS	5
4100 AND 4200 SERIES CRIMP TOOLS	6
COMPACT 2100 SERIES CRIMP TOOLS	1( 12
3100 SERIES CRIMP TOOLS OPEN BARREL CONTACTS	13
6500 SERIES THRIFT CRIMP TOOLS	14
CUTTERS & WIRE WORX	15
OEM CONNECTOR MANUFACTURER COMPATIBLE TOOLS	16
CATV   SATELLITE	18
COMPRESSION DROP TOOLS	19
3100 SERIES CRIMP TOOLS	21
4100 AND 4200 SERIES CRIMP TOOLS	22
6500 SERIES CRIMP TOOLS   COMPOUND ACTION CRIMP TOOL	23
CABLE PREPARATION   STRIP TOOLS	24
CARTRIDGE STRIPPERS	25
CABLE PREPARATION   STRIP TOOLS	26
VOICE   DATA   VIDEO	28
MODULAR PLUG CRIMP TOOLS	29
COAX CRIMP TOOLS	32
AUTOMOTIVE	34
WEATHER PACK CRIMP TOOLS	35
METRI-PACK, MICRO-PACK & HEAT SHRINK CONNECTORS	36
TERMINAL REPAIR CRIMP TOOLS	38
BATTERY LUG CRIMP TOOLS	40
WIRE ROPE	42
CUTTING AND SWAGING TOOLS	43
INDUSTRIAL	44
PLIERS AND PUNCH TOOLS	45
CECMENT MATRIX	,
SEGMENT MATRIX TOOL SELECTION CHARTS	46
PRODUCT NUMBER INDEX	47
OETIKER TOOL CORP.	48

# **Products & Segments**


## Matrix

	Electrical / Electronic	CATV/Satellite
		SARGENT SARZDO US
Crimp Tools	Page 4-17	Page 21-23
Cable and Wire Preparation/Strip Tools	_	Page 25-27
Compression Drop Tools	_	Page 18-20
Power Crimp Tools	Page 5	_
OEM Connector Manufacturer Compatible Tools	Page 16-17	_
Modular Plug Crimp Tools	_	_
Tubing and Conduit Cutter and Wire Worx	Page 15	_
Pliers and Punch Tools	_	_
Wire Rope Cutting/Swaging Tools	_	_

Voice/Data/Video	Automotive	Wire Rope	Industrial
	St. of the state o		
Page 28-33	Page 34-41	_	_
Page 25-27	-	-	_
1	1	1	-
-	Page 39	-	_
-	Page 35-37	_	_
Page 28-31	-	-	-
-	-	-	-
_	-	_	Page 44-45
-	-	Page 42-43	_

# **ELECTRICAL | ELECTRONIC**

Crimp Tools
Power Crimp Tools
Power Lug Crimp Tools
Open Barrel Contacts
OEM Connector Manufacturer Compatible Crimp Tools
Cutters for Plastic Conduit
Wire Worx

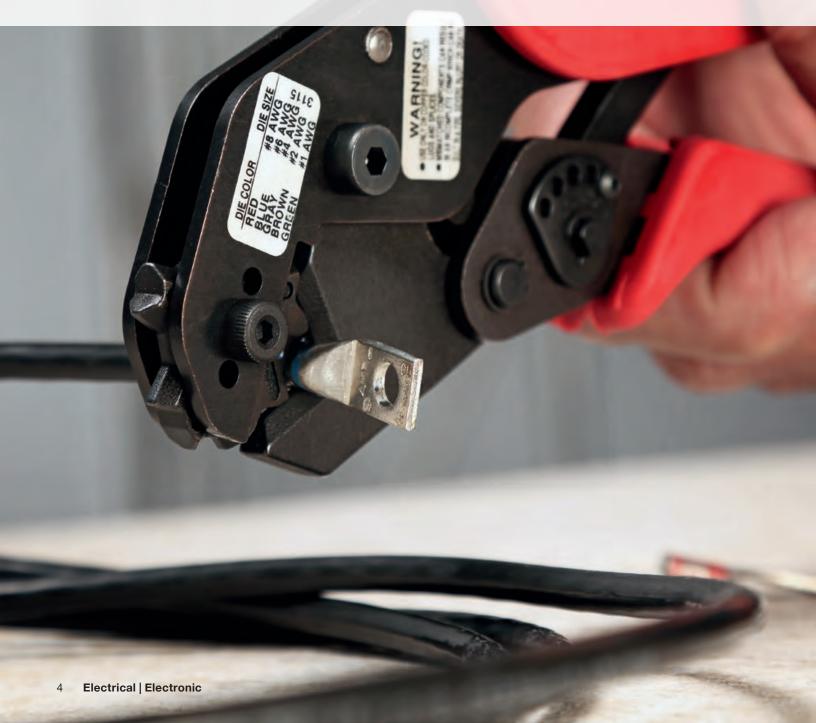

## ELECTRICAL | ELECTRONIC POWER CRIMP TOOLS



## **Power Lug Crimp Tool**

4290 CT

- Power Lug Crimper 8, 6, 4 & 2 AWG
- Dies rotate without tools for quick size switching
- Each crimp cavity is color-coded for easy, speedy identi tion
- Simple to adjust and maintain
- Ergonomic, molded cushioned grips make crimping easier
- 10 ½" tool length allows two-handed crimping when extra leverage is needed
- Finished crimps meet or exceed U.L. tensile strength requirements







## **Power Lug Crimp Tool**

4295 CT

- Power Lug Crimper 8, 6, 4, 2 & 1 AWG
- Dies rotate without tools for quick size switching
- Each crimp cavity is color-coded for easy, speedy identi tion
- Simple to adjust and maintain
- Ergonomic, molded cushioned grips make crimping easier
- 10 ½" tool length allows two-handed crimping when extra leverage is needed
- Finished crimps meet or exceed U.L. tensile strength requirements







### **Power Lug Crimp Tool**

4296 CT

- Power Lug Crimper 8, 6, 4, 2, 1 & 1/0 AWG
- Dies rotate without tools for quick size switching
- Each crimp cavity is color-coded for easy, speedy identi tion
- Simple to adjust and maintain
- Ergonomic, molded cushioned grips make crimping easier
- 10 ½" tool length allows two-handed crimping when extra leverage is needed
- Finished crimps meet or exceed U.L. tensile strength requirements







### **Power Crimp Tool**

6220 CT

- Crimps conductor portion of insulated and non-insulated terminals
- Four cavities: 8, 6, 4, & 2 AWG
- Cavities are identi ed by wire size and product type







**NOTE** Crimp short barrel lugs at least two times and long barrel lugs at least three times to ensure proper connection

## ELECTRICAL | ELECTRONIC

## 4100 AND 4200 SERIES CRIMP TOOLS



## Super Crimp Tool frame only

### 4100 Series

- Designed with the durability and quality requirements of today's professional tradesmen
- Precision, interchangeable dies for multiple applications
- Ergonomic, progressive pivoting design for maximum crimping force and minimal handle pressure
- Multi-purpose frame designed and manufactured to exacting speci cations
- Molded grips and easy-reach jaws minimize user fatigue
- Fine blanked, high-carbon steel for the ultimate in accuracy and durability
- Single mounting screw per die makes changing between applications quick and easy
- Tool length 91/2"
- Molded grips
- Uses 4100 Series die sets
- See page 8–9 for line drawings, speci c applications and die set numbers



## Super Ergo Crimp Tool frame only

### 4200 Series

- Designed with the durability and quality requirements of today's professional tradesmen
- Precision, interchangeable dies for multiple applications
- Ergonomic, progressive pivoting design for maximum crimping force and minimal handle pressure
- Multi-purpose frame designed and manufactured to exacting speci cations
- Molded grips and easy-reach jaws minimize user fatigue
- Fine blanked, high-carbon steel for the ultimate in accuracy and durability
- Single mounting screw per die makes changing between applications quick and easy
- Tool length 10 1/2" provides additional leverage and mechanical advantage
- Cushioned grips
- Uses 4100 Series die sets
- See page 8–9 for line drawings, speci c applications and die set numbers

**NOTE** Refer to 4100 Series die set chart for line drawings, speci c applications and die set numbers



## **Super Crimp Tool System Coax Kit**

### TK 4150


The Super Crimp System includes a 4100 Series Tool Frame, a selection of four interchangeable die sets for the most popular cable groups and a 8300 Easy Strip tool.


All components are conveniently arranged in a durable plastic storage case.


#### Includes

- 4100 Super Crimp frame with two mounting screws for easy die set change over
- All dies interlock to provide precise alignment and crimping
- Die Sets: 4100-65, 4100-66, 4100-67 and 4100-69
   fo ber optic and coax applications
- The 8300 Easy Strip provides two and three level RG58, RG59 and RG62 coax cable stripping

## Frame and Die Set Combination

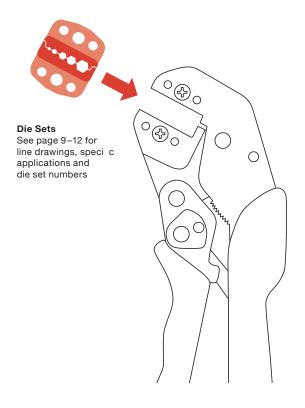



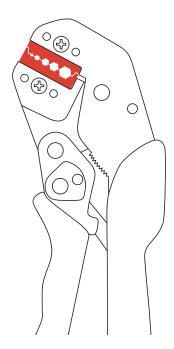

## ELECTRICAL | ELECTRONIC 4100 AND 4200 SERIES CRIMP TOOLS

## **Application and Die Set Information**

4100 and 4200 Series Crimp Tools





**NON-INSULATED** 



#### **INSULATED**















**POWER POLE** 

4220 CT/ 4120 CT Crimps conductor

portion of insulated terminals and splices in a single action. Three cavities: Red 22-16 AWG, Blue 16-14 AWG & Yellow 12-10 AWG. 4100-20 Die Set only

4240 CT/ 4140 CT Crimps conductor portion of insulated terminals and splices in a single action. Three cavities: Red 22-16 AWG, Blue 16-14 AWG & Yellow 12-10 AWG. Red and Blue cavities produce inspection dimples. 4100-40 Die Set only

### 4225 CT/ 4125 CT

Crimps noninsulated terminals and splices in a single action. Three cavities: Red 22-16 AWG, Blue 16-14 AWG & Yellow 12-10 AWG. 4100-25 Die Set only

#### 4235 CT / 4135 CT Crimps noninsulated terminals and splices in a single action. Four cavities: Red 22-16 AWG, Blue 16-14 AWG & Yellow 12-10 AWG & 8 AWG. 4100-35

Die Set only

#### 4236 MCT/ 4136 MCT Crimps non-

insulated terminals and splices to four metric sizes:  $0,5-1,5\,mm^2,$ 1,5-2,5 mm<sup>2</sup>, 4,0-6,0 mm<sup>2</sup> and 10 mm<sup>2</sup> (28-8 AWG). 4100-36 Die Set only

#### 4237 MCT/ 4137 MCT

Crimps noninsulated terminals and splices to three metric sizes:  $4,0\,mm^2,\,6,0\,mm^2$ and 10 mm<sup>2</sup> (12-8 AWG). 4100-37 Die Set only


#### 4282 CT / 4182 CT Crimps 15 and

30 amp power pole connectors. "B" style crimps with indentor are produced in two cavities: (A) 20-16 AWG & (B) 16-12 AWG. 4100-82 Die Set only









### WIRE FERRULE | BOOTLACE




#### 4283 MCT/ 4183 MCT

Crimps insulated and non-insulated wire tip ferrules to ve metric sizes: 0,25-0,5 mm<sup>2</sup>, 0,75-1,5 mm<sup>2</sup>, 4,0 mm<sup>2</sup> & 6,0 mm<sup>2</sup> (28-10 AWG). 4100-83 Die Set only



### **SLIDE ON**



### 4241 CT/4141 CT

Crimps conductor and strain relief portion of insulated slide-on terminals in a single action. Two cavities: Red 22-16 AWG & Blue 16-14 AWG. 4100-41 Die Set only



### **FIBER OPTIC**





SMA, SMB or SFB styl ber optic connectors to .151", .178" or .213" hex. 4100-75 Die Set only



#### 4284 CT/ 4184 CT Crimps 3M SC

and S ber optic connectors to .120", .137" or .190' round. 4100-84 Die Set only



### 4285 CT/ 4185 CT

Crimps Amphenol SC and S ber optic connectors to .137" or .190" 4100-41 Die Set only



### COAXIAL



4266 CT/ 4166 CT Crimps center pin to .042" square or .068" hex, RG58 ferrule to .213" hex and RG59 ferrule to .255" hex on plenum coaxial cable.

4100-66 Die Set only



4267 CT/ 4167 CT Crimps center pin to .042" square or .068" hex, RG58 ferrule to .255" hex

and 8281 ferrule to .324" hex. 4100-67

Die Set only



4269 CT/ 4169 CT Crimps center pin

to .068", .080" or .100" hex and RG58 ferrule to .429" hex. 4100-69

Die Set only



### 4270 CT / 4170 CT

Crimps center pin to .092" hex and outer ferrule on N type thicknet RG8 to .412" hex.

4100-70 Die Set only



### 4276 CT / 4176 CT

Crimps center pin to .044" or .050" square, RG58 ferrule to .206" round and RG59 ferrule (AMP connector) to

.238" round. 4100-76

Die Set only



#### 4278 CT / 4178 CT Crimps center pin

to .100" or .128" hex and RG8 ferrule to .429" hex. 4100-78

Die Set only




#### 4256 CT/ 4156 CT Crimps center pin

to .042" square or .068" hex, certai ber optic connectors outer

ferrules to .100" hex, RG174 ferrule to .178", RG58 ferrule to .213" hex and R59 ferrule to

.255" hex. 4100-56



### 4265 CT/ 4165 CT

Crimps center pin to .042" square or .068" hex and small cable to .128", .151" or .178" hex.

4100-65 Die Set only

Die Set only



### **CATV**



4272 CT/ 4172 CT Crimps RG59 CATV connector to .324" hex and RG6 to .360" hex. 4100-72 Die Set only

**NOTE** Refer to the Coaxial Tool Selection Chart on page 46 to nd more coaxial tool options.

## ELECTRICAL | ELECTRONIC

## **COMPACT 2100 SERIES CRIMP TOOLS**




### **Compact Crimp Tool** frame only

### 2100 Series

- Comes with die mounting screws
- · Easily customized with 15 di erent die sets
- Ideal for terminating small to medium size wire or cable
- Compact design is efficient particularly in limited access areas
- Multi-purpose frame designed and manufactured to exacting speci cations
- Molded grips and easy-reach jaws minimize user fatigue
- Fine blanked, high-carbon steel for the ultimate in quality and durability
- Single mounting screw per die makes changing between applications quick and easy
- 50,000 cycles rating
- Tool length 7 5/8"

## **Application and Die Set Information**

Compact 2100 Series Crimp Tools







#### 2142 CT Crimps conductor and strain portion of insulated

terminals and splices in a single action. Two cavities: Red 22-16 AWG & Blue 16-14 AWG. 2100-42 Die Set only



### **POWER POLE**



#### 2182 CT

Crimps 15 and 30 amp power pole connectors. "B" style crimps with indentor are produced in two cavities: (A) 20-16 AWG & (B) 16-12 AWG. 2100-82 Die Set only



### **WIRE FERRULE**



#### 2183 MCT

Crimps insulated and non-insulated wire tip ferrules to ve metric sizes: 0,25-0,5 mm<sup>2</sup>, 0,75-1,5 mm<sup>2</sup>, 4,0 mm<sup>2</sup> and 6,0 mm<sup>2</sup> (28-10 AWG) 2100-83M Die Set only



### **PIN & SOCKET**




#### 2186 CT

Crimps commercial grade solid circular pins and sockets in three cavities: 20 AWG, 16 AWG and 12 AWG. 2100-86M Die Set only

### **Application and Die Set Information**

### Compact 2100 Series Crimp Tools






#### D-SUB







COAXIAL









#### 2124 CT Crimps high density D-subminiature pin and socket open barrel contacts. Built-in locator and wire stop properly orients the contact. Crimps "B" style oval conductor and insulator tabs in a single action. Two cavities: (A) 26-22 AWG & (B) 30-28 AWG. 2100-24 Die Set only

#### 2127 CT Crimps D-subminiature open barrel terminals. Built-in locator and wire stop properly orient the contact. Conductor and insulator crimps meet OEM speci tions "B" style conductor crimps and "oval" style insulator crimps are produced in two cavities: (Front) 30-26 AWG & (Rear) 24-20 AWG. 2100-27 Die Set only

#### 2151 CT Crimps center pin to .068" hex, RG58 ferrule to .213" hex and R59 ferrule to .255" hex. 2100-51

.324" hex. Die Set only

#### 2152 CT Crimps center pin to .068" hex, RG174 ferrule to .178" hex and 8281 ferrule to

2100-52 Die Set only

### 2153 CT

Crimps center pin to .042" hex, RG58 ferrule to .213" hex and R59 ferrule to .255" hex. 2100-53

Die Set only

### 2154 CT

Crimps center pin to .042" square or .068" hex, RG58 ferrule to .190" hex and RG59 ferrule to .213" hex on plenum coaxial

cable. 2100-54 Die Set only


#### 2164 CT

Crimps center pin to .068" hex, RG59 ferrule to .255" hex and 8281 ferrule to .324" hex. 2100-64 Die Set only



2100-65


Die Set only




### **FIBER OPTIC**



Die Set only







2184 CT Crimps 3M SC and S ber optic connectors to .120", .137" or .190" round. 2100-84 Die Set only

**NOTE** Refer to the Coaxial Tool Selection Chart on page 46 to nd more coaxial tool options.

## ELECTRICAL | ELECTRONIC 3100 SERIES CRIMP TOOLS

- · Fully machined and heat treated crimp cavities
- · Full cycle mechanism that assures consistent crimps
- · Precise engineering for specific applications
- · Ratcheting for positive performance



# Insulated Terminal Crimp Tool 3120 CT

- Crimps conductor portion of insulated terminals
- Three cavities: 22-16 AWG (Red),
  16-14 AWG (Blue) & 12-10 AWG (Yellow)









# **Heat Shrink Splice Crimp Tool** 3122 CT

- Crimps conductor portion of heat shrink terminals
- Three cavities: 22–18 AWG (Red), 16–14 AWG (Blue) & 12–10 AWG (Yellow)









## Non-Insulated Terminal Crimp Tool

3125 CT

- Crimps non-insulated terminals and splices
- Three cavities: 22-16 AWG (Red),
  16-14 AWG (Blue) & 12-10 AWG (Yellow)









## Insulated Terminal Crimp Tool

3140 CT

- Crimps conductor and strain relief portion of insulated terminals and butt splices
- Crimps in one tool closure
- Three cavities: 22-16 AWG (Red),
   16-14 AWG (Blue) & 12-10 AWG (Yellow)
- Includes built-in locator and wire-stop









## Insulated Terminal Crimp Tool with Extended Handle

3145 CT

- Same as 3140 CT with extended handle
- Handle length 11" for extra leverage







## ELECTRICAL | ELECTRONIC OPEN BARREL CONTACTS



## Open Barrel Terminal Crimping Tool

3128 CT

- Crimps a wide variety of open barrel contacts, medium size wire
- Crimps conductor and insulation contacts in separate cavities. Tool must be closed twice to complete crimp.
- "B" type insulation crimps in two cavities: (B) 18-14 AWG & (D) 24-20 AWG
- "B" type conductor crimps in three cavities:
  (A) 16-14 AWG, (C) 20-18 AWG &
  (E) 24-22 AWG









## Open Barrel Terminal Crimping Tool

3126 CT

- Crimps a wide variety of open barrel contacts, including D-subminiature
- Crimps conductor and insulation contacts in separate cavities. Tool must be closed twice to complete crimp.
- "Oval" type insulation crimps in two cavities: (B) 20-16 AWG & (D) 30-22 AWG
- "B" type conductor crimps in three cavities:
  (A) 18-16 AWG, (C) 22-20 AWG and
  (E) 30-24 AWG
- Includes built-in locator and wire-stop









### **D-Subminiature Crimp Tool**

1027 CT

- Crimps D-subminiature pin and socket open barrel contacts
- Locator and wire stop properly orient the contact during crimping
- Conductor and insulation crimp are produced in one tool closure
- Conductor crimps are "B" type, insulation crimps are "oval" type
- Two cavities: 30 -26 AWG & 24 -20 AWG







## ELECTRICAL | ELECTRONIC 6500 SERIES THRIFT CRIMP TOOLS



### **Thrift Crimp Tools with** Interchangeable Jaws

### 6500 Series

- 6500 Frame Assembly only can be ordered separately
- All 6500 Series tools feature full cycle ratcheting for consistent terminations and an easily accessible ratchet release mechanism
- All crimps to industry standards
- Die Sets are interchangeable and swap out with a screwdriver
- Tool length 8 ½"

## **Application and Die Set Information**

6500 Series Thrift Crimp Tools











**INSULATED** 







### COAXIAL











### 6540 CT

Crimps conductor and strain relief portion of insulated terminals and splices in one tool closure. Conductor and insulation crimps are identical. 4,0-6,0 mm<sup>2</sup> Three cavities: 22-16 AWG (Red), 16-14 AWG (Blue) & Dies only order 12-10 AWG (Yellow). 6500-25 Dies only order 6500-40

6525 CT Crimps noninsulated terminals and splices to metric standards. Four cavities:  $0,5-1,55\,mm^2,$ 1,5-2,5 mm<sup>2</sup>, and 10.0 mm<sup>2</sup> & 22-8 AWG.

#### 6541 CT

Crimps conductor and strain relief portion of insulated slide-on terminals in one tool closure. Three cavities: 20-16 AWG (Red), 16-14 AWG (Blue) and 12-10 AWG (Yellow). Dies only order 6500-41

#### 6530 CT

Crimps a wide variety of open barrel contacts medium to large size wire with one tool closure. Type "B" crimps. Three cavities: (A) 20-16 AWG. (B) 16-14 AWG & (C) 12-10 AWG. Dies only order 6500-30

### 6566 CT

Crimps center pin to a .042" square or .068" hex, RG58 ferrule to a .213 hex and RG59 ferrule to a .255" hex. Dies only order 6500-66

> **NOTE** Refer to the Coaxial Tool Selection Chart on page 46 to nd more coaxial tool options.

## ELECTRICAL | ELECTRONIC CUTTERS & WIRE WORX



## Quick-Cut Radial Conduit Cutter

9504 QC

- Cuts 1/2" and 3/4" HDPE Thin Wall conduit (SDR 9, SDR 11, SDR 13.5, SDR 15.5, SDR 17, SCH 40 & 1/2" and 3/4" Flex Plus Blue)
- Cut exible non-metallic tubing conduit
- Fits in tight spaces only 41/4" long
- Blade lasts for thousands of cuts
- Eliminates deburring

#### Easy to Use

- 1-Push tube into cutting chamber
- 2-Rotate cutter in direction of arrow
- 3-Squeeze handles and remove tube



## Wire-Worx Multi Purpose Tool for Soft Copper Wire

8650 WW

- Patent pending
- Tough glass- lled nylon construction
- Small enough to carry it in your pocket, long enough for excellent leverage
- Terri c for speeding up installation of electrical outlets, switches, junction boxes, lighting and more
- Reduces wear and tear o ngers and knuckles

#### **Features**

- Wire cap connector (3 sizes)
- Closing latch
- Wire gage identi er (10-18 gage)
- Stripper for solid wire (10-18 gage)
- Stripper for stranded wire (10-20 gage)
- Cutter for solid wire (10-18 gage)
- Cutter for stranded wire (10-20 gage)
- Wire bender for outlets and switches (12-14 gage)
- Wire twister for prep(2 or 3 wires, 12 and 14 gage)
- Strip length gage 5/16", 3/8", 7/16", 1/2"
- Non-metallic jacket slitter



### Multi Function Electrical Crimper, Stripper, Wire & Bolt Cutter

1020 CT

#### **Cutters**

- Two cutters
- Anvil type nose cutter conveniently up front for tight spaces
- Scissor type cutter located behind the pivot point minimizes distortion when cutting stranded wire

### **Crimps**

- Crimps automotive "F" type ignition terminals 7–8 mm size in one cavity
- Crimps conductor portion of insulated terminals and splices.
- Crimps RED 22–16 AWG BLUE 16–14 AWG and YELLOW 12–10 AWG
- Crimps non-insulated terminals and splices

#### Strips

- Precision ground scissor type wire stripper provides a clean nick free strip on 8 AWG solid to 22 AWG stranded
- Cavities are marked by wire sizes and "solid" or "stranded"







### ELECTRICAL | ELECTRONIC

## **OEM CONNECTOR MANUFACTURER COMPATIBLE TOOLS**



## **D-Subminiature Pins** and Sockets (AMP 90312)

3127 CT

- The conductor and insulator crimps are produced in one closure
- Crimps conform to OEM speci cations
- Conductor crimps are "B" type
- Insulated crimps are "oval" type
- Two cavities: 28-24 AWG & 24-20 AWG
- Easy load locator and wire stop orient pins and sockets during crimping adding reliability to the crimp









### **Multimate Connector Pins** and Sockets (AMP 90277)

3131 CT

- The conductor and insulator crimps are produced in one closure
- Crimps conform to OEM speci cations
- Conductor crimps are "B" type
- Insulated crimps are "oval" type
- Three cavities: 28-24 AWG, 24-20 AWG & 18-16 AWG
- Easy load locator and wire stop orient pins and sockets during crimping adding reliability to the crimp









## .093 Power Pins and Sockets (Molex 1031E)

3132 CT

- The conductor and insulator crimps are produced in one closure
- Crimps conform to OEM speci cations
- Conductor crimps are "B" type
- Insulated crimps are "oval" type
- Two cavities: 24-20 AWG & 18-16 AWG
- · Easy load locator and wire stop orient pins and sockets during crimping adding reliability to the crimp









## .062 Power Pins and Sockets (Molex 1719C)

3133 CT

- The conductor and insulator crimps are produced in one closure
- Crimps conform to OEM speci cations
- Conductor and insulator crimps are "B" type
- Two cavities: (A) 18 AWG & (B) 24-20 AWG
- Easy load locator and wire stop orient pins and sockets during crimping adding reliability to the crimp







### **Terminal Manufacturers**

OEM TOOL MODEL	SARGENT TOOL NUMBER
AMP 90277	3131 CT
AMP 90312	3127 CT
Molex 1031E	3132 CT
Molex 1719C	3133 CT
Molex 2262	3134 CT
Molex 2262A	3135 CT
Molex 2445A	3136 CT
Raychem AD 1377	3137 CT



## .100 Interconnection System Crimp Terminals (Molex 2262)

3134 CT

- The conductor and insulator crimps are produced in one closure
- Crimps conform to OEM speci cations
- Conductor and insulator crimps are "B" type
- Two cavities: (A) 30-28 AWG & (B) 26-24 AWG



## .100 Interconnection System Crimp Terminals (Molex 2262A)

3135 CT

- The conductor and insulator crimps are produced in one closure
- Crimps conform to OEM speci cations
- Conductor and insulator crimps are "B" type
- Two cavities: (A) 30-28 AWG & (B) 26-24 AWG















## .156 Interconnection System Crimp Terminals (Molex 2445A)

3136 CT

- The conductor and insulator crimps are produced in one closure
- Crimps conform to OEM speci cations
- Conductor and insulator crimps are "B" type
- Two cavities: (A) 26-22 AWG & (B) 30-24 AWG
- Easy load locator and wire stop orient pins and sockets during crimping adding reliability to the crimp









## Commercial Grade Butt Splices (Raychem AD 1377)

3137 CT

- Crimps conform to OEM speci cations
- Three cavities: 26–20 AWG (Red), 20–16 AWG (Blue) & 16–12 AWG (Yellow)
- Easy load locator orients the butt splice during crimping adding reliability to the crimp







# CATV | SATELLITE

Compression Drop Tools Crimp Tools



# CATV | SATELLITE COMPRESSION DROP TOOLS

- · Compression Drop Tools for male "F" coaxial cable compression connectors
- · Heads rotate to quickly switch between RG6/59 and RG11/7 applications
- · Hardened steel construction, black oxide finish, ergonomic color coded grips
- · Choose among four different models according to your application and design preference



## SAR Series Compression Tool SAR-300 US

- For PPC EX and Aquatight "F" connectors
- Superior mechanical advantage
- Patented handle design
- Front-load design is ideal for con ned areas





### **SAR Series Compression Tool**

SAR-300 CS

- For PPC EX and Aquatight "F" connectors
- Clam shell design
- Patent pending





## SAR Series Compression Tool SAR-200 US

- For PPC EXXL, CMP and Aquatight;
   Belden Snap-N-Seal; Corning Gilbert
   UltraShield, UltraRange and UltraEase;
   Arris-Digicon "F" Connectors
- Superior mechanical advantage
- Patented handle design
- Front-load design is ideal for con ned areas





### **SAR Series Compression Tool**

SAR-200 CS

- For PPC EXXL, CMP and Aquatight;
   Belden Snap-N-Seal; Corning Gilbert
   UltraShield, UltraRange and UltraEase;
   Arris-Digicon "F" Connectors
- Clam shell design
- Patent pending



## CATV | SATELLITE

## **COMPRESSION DROP TOOLS**

- · Compression Drop Tools for male "F" coaxial cable compression connectors
- · High mechanical advantage reduces force during connector compression minimizing user fatigue
- · Front loaded design provides easy access in M.D.U. enclosures and wall plates
- · High carbon steel parts are heat treated for longevity of operation
- · Handle grips are ergonomically designed for durability
- · Steel models conservatively rated at 25,000 cycles on high load connectors



### Uni-Seal Compression Drop Tool

8800 Series

• RG6/59

MODEL	APPLICATION
8800 US	Belden, Gilbert, PPC EXXL, PCT DRS, etc.
8810 US	Stirling
8820 US	PCT TRS Series G, PPC EX Series F





## Uni-Seal Compression Drop Tool

9000 Series

 Moveable yoke for quick changing between RG6/59 and RG11/7

MODEL	APPLICATION
9000 US	Uni-Seal Drop Tool - Belden Pro-Gen, SnS, EXXL, Corning Gilbert Ultra Seal, Antec Digicon
9010 US	Uni-Seal Drop Tool - Belden EX, PCT TRS





## 360° Uni-Seal Compression Drop Tool

9030 Series

- RG6/59 & RG11/7
- Spring-loaded cable positioners provide 360° support against connector assuring uniform compression and eliminating faulty connections

MODEL	APPLICATION	
	360° Combo Compression Tool RG6/59 & RG11/7 - Belden EX, PCT TRS	
9035 US	360° Combo Compression Tool RG6/59 & RG11/7	





## **Uni-Seal Combination Stripper** and Compression Drop Tool

9800 Series

- RG6/59
- Spring loade nger loop handle opens the stripping chamber and applies pressure to cable

MODEL	APPLICATION
9800 US	RG6/59
9810 US	RG6/59 Stirling, SPL
9820 US	RG6/59 PPC EX



## CATV | SATELLITE 3100 SERIES CRIMP TOOLS



## Coaxial Cable Connector Crimp Tool

3150 CT

- Crimps RG6 connectors to .384" hex
- Crimps RG59 connectors to .324" or .262" hex







## Coaxial Cable Connector Crimp Tool

3151 CT

 Crimps center pin to .068" hex, RG58 ferrule to .213" hex and RG59 ferrule to .255" hex







## **Coaxial Cable Connector Crimp Tool**

3161 CT

- Crimps RG6 universal ribbed connectors to .360" hex
- Crimps RG59 connectors to .324" hex







## **Coaxial Cable Connector Crimp Tool**

3162 CT

- Crimps RG11 connectors to .470" hex
- Crimps RG6 and RG59 universal ribbed connectors to .360" hex





**NOTE** Refer to the Coaxial Tool Selection Chart on page 46 to nd more coaxial tool options.

## CATV | SATELLITE

## 4100 AND 4200 SERIES CRIMP TOOLS



### **Connector Crimp Tool RG59 & RG6**

### 4172 CT

- Crimps the RG59 ferrule on CATV connectors to a .324 hex and the RG6 to a .360 hex
- A multi-purpose frame manufactured to exacting speci cations to accept interchangeable dies
- Molded grips and an easy reach frame to minimize user fatigue
- · Reamed bearing holes, centerless ground pivots and heat treated working components
- Positive ratcheting assembly with emergency
- Conservatively rated tool life of 50,000 cycles
- · Crimps that meet or exceed U.L. tensile requirements









### **Connector Crimp Tool RG59 & RG6**

### 4272 CT

- Crimps the RG59 ferrule on CATV connectors to a .324 hex and the RG6 to a .360 hex
- A multi-purpose frame manufactured to exacting speci cations to accept interchangeable dies
- Molded grips and an easy reach frame to minimize user fatigue
- Reamed bearing holes, centerless ground pivots and heat treated working components
- Positive ratcheting assembly with emergency
- Conservatively rated tool life of 50,000 cycles
- · Crimps that meet or exceed U.L. tensile requirements









### **Super Crimp System Coax Kit**

#### TK 4150

The Super Crimp System includes a 4100 Series Tool Frame, a selection of four interchangeable die set for the most popular cable groups and a 8300 Easy Strip tool. All components are conveniently arranged in a durable plastic storage case.

### Includes

- 4100 Super Crimp frame with two mounting screws for easy die set change over
- All dies interlock to provide precise alignment and crimping
- Die Sets: 4100-65, 4100-66, 4100-67 and 4100-69 fo ber optic and coax applications
- The 8300 Easy Strip provides two and three level RG58, RG59 and RG62 coax cable stripping

## CATV | SATELLITE

## 6500 SERIES CRIMP TOOLS | COMPOUND ACTION CRIMP TOOL



## Center Pin Crimp Tool RG58 & RG59

6566 CT

- Crimps center pin to a .042" square or .068" hex, RG58 ferrule to a .213 hex and RG59 ferrule to a .255" hex
- Dies only order 6500-66









## **Coaxial Cable Crimp Tool**

1056 CT

 Crimps center pin to a .042" square or .068" hex, RG58 ferrule to a .213" hex and RG59 ferrule to a .255" hex







# CABLE PREPARATION | STRIP TOOLS

Multi-Tasker Cartridge Strippers
Easy-Strip Cartridge Strippers
Tele-Strip UTP Strippers
STUBBY Cartridge Strippers for Tight Spots
Quad-Strippers



## CABLE PREPARATION | STRIP TOOLS CARTRIDGE STRIPPERS



### Multi-Tasker Cartridge Stripper

### 8100 MT Series

Product shown: 8175 MT

- Two in-use cartridges for the ultimate in wire prep convenience
- Both cartridges are useable at any time
- Can be set up for RG6/59 and RG11/7; switch between the two without replacing cartridges
- Larg nger loop for easy rotation
- Third cavity holds one replacement cartridge
- Long life cutting blade with preset height cuts without cutting the braid or nicking the conductor
- Cartridges are compatible with other SARGENT® strippers
- One piece construction body features patented molded-in living hinge

MODEL	APPLICATION
8105 MT	RG6/59 & RG6/59
8120 MT	RG6/59 & RG11/7
8140 MT	RG6/59 & UTP (CAT5, CAT5e, CAT6)
8145 MT	RG6/59, RG11/7 & UTP UTP (CAT5, CAT5e, CAT6)
8170 MT	RG6/59 & Mini-Coax RG174
8175 MT	RG6/59, Mini-Coax RG174 & UTP (CAT5, CAT5e, CAT6)
8185 MT	RG6/59 & RG6/59 EZF



Product shown

8720 ES

# Easy-Strip Cartridge Stripper

8700 Series

- One piece construction body features patented molded-in living hinge
- SARGENT® radial cutting action is the industry standard
- Second cavity holds one replacement cartridge
- Cartridges are compatible with other SARGENT® strippers
- Long life cutting blade with preset height cuts without cutting the braid or nicking the conductor

G6/59 CATV
G11/7 CATV
G6/59 & RG11/7
TP (CAT5, CAT5e, CAT6)
G6/59 & UTP (CAT5, CAT5e, CAT6)
G58/59
G58/59 3-level (.235/.235) 1 Cartridge
G58/59 & Mini-Coax RG174 2 Cartridges
ni-Coax & Cut-Off of Copper Center Conductor
ini-Coax RG174 & UTP (CAT5, CAT5e, CAT6)
3 3 3 3 3 3



## Replacement Cartridges for SARGENT® Wire Prep Tools

Color coded replacement cartridges are available for the full line of SARGENT® wire prep tools. These cartridges allow quick and easy

customization.











PART #	10 PACK	APPLICATION
8700-00	8700 RB	RG6/59 Stripper (1/4" × 5/16") – Black
8700-10	8710 RB	RG11/7 Stripper (1/4" × 5/16") – Gray
8700-15	8715 RB	UTP Cut-Off (CAT5, CAT5e, CAT6) – Red
8700-25	8725 RB	
8700-30	8730 RB	UTP Stripper (CAT5, CAT5e, CAT6) - Blue
8700-50	8750 RB	RG58/59 3-level (.312"/.109") - Brown
8700-60	8760 RB	RG58/59 3-level (.235"/235") - Green
8700-70	8770 RB	Mini Coax Stripper 2 level - Green

**NOTE** Refer to Cable Preparation/Strip Tool Selection Chart on page 46 t nd more cable prep/strip tool options.

# CABLE PREPARATION | STRIP TOOLS CABLE PREPARATION | STRIP TOOLS



## **Easy-Strip Coax Cable Prep Tools Stripper**

### 8200

- Two cavities: for RG6/59
- Long life cutting blades
- Strip and slit lengths can be varied to depending on the application
- Multiple nest cavities for removal of a wide variety of jacket materials.
- Unique "V" blade design prevents nicking of center conductor
- Living hinge exerts consistent cutting pressure



## **Easy-Strip Coax Cable Prep Tools Stripper**

### 8300

- Three cavities: for RG59/58 and RG62
- Long life cutting blades
- Strip and slit lengths can be varied to depending on the application
- Multiple nest cavities for removal of a wide variety of jacket materials.
- Unique "V" blade design prevents nicking of center conductor
- Living hinge exerts consistent cutting pressure
- Conductor cut removes jacket, braid and insulator
- Braid cut removes jacket and braid only



### Product shown:

### Tele-Strip UTP Stripper

### 8400 Series

- 8400 and 8450 Strip and slit UTP (CAT5, CAT 5e & CAT6)
- 8400 opposing blades also strip flat cable

MODEL	APPLICATION	
MODEL	APPLICATION	
8400	UTP (CAT5, CAT5e, CAT6) & Flat Cable	
8450	UTP (CAT5, CAT5e, CAT6)	



Product shown: 8500 S

## STUBBY Cartridge Stripper for Tight Spots

### 8500 Series

- Strips coax in MDU boxes, wall plates and most tight spots
- Spins around just like a screwdriver
- Don't call for a rewire or cut drywall to move the box, let STUBBY squeeze in
- Customize your STUBBY with standard SARGENT® stripper cartridges
- STUBBY goes where no stripper has gone before

MODEL	APPLICATION
8500 S	RG6/59 CATV
8530 S	UTP (CAT5, CAT5e, CAT6)



#### Product shown: 8640 QS

## **Quad-Stripper**

### 8600 Series

- Order Quad-Stripper out tted with the cartridges that meet your speci c applications or order cartridges separately
- Up to eight cable and wire prep operations with one tool
- Replaceable cartridges makes customization a snap
- Spring maintains precise cutting and stripping tension
- Patented
- On Quad-Stripper back CATV connector nest for safe, reliable and easy cable end insertion


## **Cartridges & Foil Blades for Quad Stripper**

Quad Stripper	8700-00 RG6/59 Stripper Black*	8700-10 RG11/7 Stripper Gray*	8700-15 CAT 5&6 Cutter Red	8700-25 RG6/59 Cutter Orange	8700-30 UTP Stripper Blue	8700-70 Mini Coax Stripper Green*	8600-RB Foil Blade RG6/59	8600-RB Foil Blade RG11/7
Strip profile with various cartridges	→ F 2/16"	4 + snr -52 = -11 w	Cur-Off	Cut-Off To Epipose Center Conductor	Stris Length Varies by Application	-   - 1/4" -   - 1/4"		
8640 QS	2	2					1	1
8641 QS	2			2			1	
8642 QS	2	1		1			1	1
8643 QS	3			1			1	
8644 QS	2			1		1	1	
8645 QS	1		1	1	1		1	
8646 QS			2		2			
8647 QS	1	1		1	1		1	1

Numbers in this chart refer to the quantity of the cartridge or blade include with the Quad Strippers listed in the left column. \*Black, gray and green cartridges must be in outermost nest to maximize stripping performance.

# **VOICE | DATA | VIDEO**

Modular Plug Crimp Tools Coax Crimp Tools

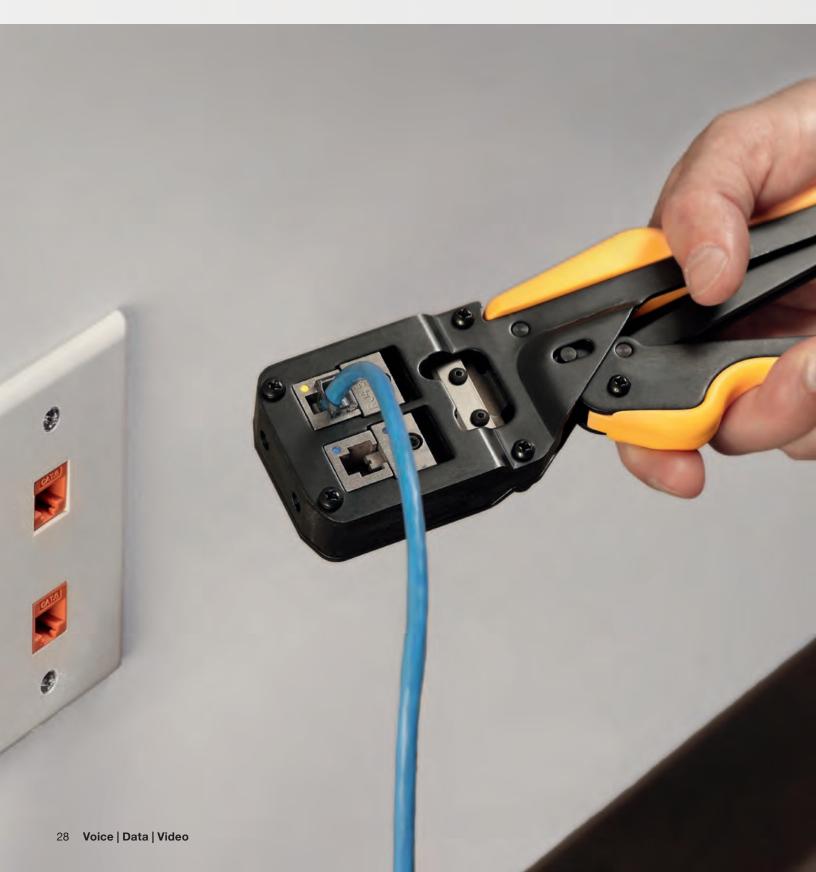

# VOICE | DATA | VIDEO MODULAR PLUG CRIMP TOOLS



## **Dual Chamber Modular Plug Crimp Tool**

7868 CT Series

- Crimps RJ11/RJ12 6-position and RJ45
   8-position modular plugs
- Front-load design is ideal for crimping in con ned areas
- Durable all metal construction with comfort grips for easy crimping
- Color coded interchangeable dies are keyed together to guarantee precise alignment
- Notched strain relief pushers mate precisely with strain relief latches allowing them to engage properly without damage
- Cuts and strip at oval cable
- Replaceable blade cuts UTP cable and strips UTP jacket
- Compound action produces high crimping forces with minimum hand pressure



	7868 CT
6 POSITION RJ11, 6P4C, RJ12, 6P6C	•
8 POSITION RJ45, 8P8C, 8P6C, 8P4C	•

## Replacement Parts for 7868 CT Dual Modular Plug Tools

REPLACEMENT DIES	APPLICATION
7100-06	RJ11/RJ12 6 position
7100-08	RJ45 8-position

REPLACEMENT BLADE	
7868 CTRB	

# VOICE | DATA | VIDEO MODULAR PLUG CRIMP TOOLS



## **Modular Plug Crimp Tool**

### 7100 Series

- Full cycle action assure consistent terminations
- Stripping feature incorporates two strip length stops to assure preps are made to industry
- Compound action produces high crimping force with minimum hand pressure





## **Modular Plug Crimp Tool**

### 7500 Series

- These tough crimpers include easy access cutting and stripping functions
- Full cycle action assures consistent terminations and release lever prevents faulty crimps
- Compound action produces high crimping force with minimum hand pressure
- Interchangeable color coded dies are keyed together to guarantee perfect alignment



## **Application information**

### 7100 and 7500 Series

	7104 CT 7504 CT	7106 CT 7506 CT	7108 CT 7508 CT	7110 CT 7510 CT
4 POSITION RJ22, 4P4C	•			
6 POSITION RJ11, 6P4C, RJ12, 6P6C		•		
8 POSITION RJ45, 8P8C, 8P6C, 8P4C			•	
10 POSITION (RJ50) 10P10C				•

7100 SERIES MODEL	7500 SERIES MODEL	DIE SET	APPLICATION
7104 CT	7504 CT	7100-04	RJ22 4-position
7106 CT	7506 CT	7100-06	RJ11/RJ12 6 position
7108 CT	7508 CT	7100-08	RJ45 8-position
7110 CT	7510 CT	7100-10	10 position
7100 CS	7100 CS	7100 CS	Replacement Blade



## **Modular Plug Crimp Tool Kit**

## TK 7100

### Includes

- 7100 Modular Plug Frame
- 7100-04 RJ22 Die Set
- 7100-06 RJ11/RJ12 Die Set
- 7100-08 RJ45 Die Set
- 7100-10 10 Position Die Set
- Handy carrying case

## VOICE | DATA | VIDEO COAX CRIMP TOOLS



### **Coax Connector Crimp Tool** frame only

4100 Series

- A multi-purpose frame manufactured to exacting speci cations to accept interchangeable dies
- Molded grips and an easy reach frame
- Reamed bearing holes, centerless ground pivots and heat treated working components
- Positive ratcheting assembly with emergency release
- Tool life of 50,000 cycles
- Crimps that meet or exceed U.L. tensile requirements
- Tool length 9½"
- Uses 4100 Series die sets



## **Coax Connector Crimp Tool** frame only

4200 Series

- A multi-purpose frame manufactured to exacting speci cations to accept interchangeable dies
- Crimps the center pin to a .042 square or .068 hex and the ferrule on small cable to a .128, 151 or 178 hex
- Molded grips and an easy reach frame
- · Reamed bearing holes, centerless ground pivots and heat treated working components
- Positive ratcheting assembly with emergency
- Tool life of 50,000 cycles
- · Crimps that meet or exceed U.L. tensile requirements

## **Die Set and Application Information**



### COAXIAL



### 4256 CT/ 4156 CT

Crimps center pin to .042" square or .068" hex, certai ber optic connectors outer ferrules to .100" hex, RG174 ferrule to .178". RG58 ferrule to .213" hex and R59 ferrule to .255" hex. 4100-56 Pinned

Die Set only



### 4265 CT / 4165 CT

Crimps center pin or .178" hex. 4100-65 Die Set only

to .042" square or .068" hex and small cable to .128", .151"



#### 4266 CT/ 4166 CT

Crimps center pin to .042" square or .068" hex, RG58 ferrule to .213" hex and RG59 ferrule to .255" hex on plenum coaxial cable.

4100-66 Die Set only



### 4267 CT / 4167 CT

Crimps center pin to .042" square or .068" hex, RG58 ferrule to .255" hex and 8281 ferrule to .324" hex.

4100-67 Die Set only



#### 4269 CT / 4169 CT

Crimps center pin to .068", .080" or .100" hex and RG58 ferrule to .429" hex. 4100-69

Die Set only



#### 4270 CT / 4170 CT

Crimps center pin to .092" hex and outer ferrule on N type thicknet RG8 to .412" hex. 4100-70 Die Set only



### 4278 CT / 4178 CT

Crimps center pin to .100" or .128" hex and RG8 ferrule to .429" hex. 4100-78 Die Set only



## Compact Crimp Tool frame only

### 2100 Series

- Interlocking die sets are easily interchanged with mounting screws on most applications
- Easily customized with 18 di erent die sets
- Ideal for terminating small to medium size wire or cable
- Compact design is efficient particularly in limited access areas
- Multi-purpose frame designed and manufactured to exacting speci cations
- Molded grips and easy-reach jaws minimize user fatigue
- Fine blanked, high-carbon steel for the ultimate in quality and durability
- Single mounting screw per die makes changing between applications quick and easy
- 50,000 cycles rating
- Tool length 7 5/8"

## **Application and Die Set Information**



### COAXIAL



#### 2151 CT Crimps center pin to .068" hex, RG58 ferrule to .213" hex and R59 ferrule to .255" hex. 2100-51 Die Set only



2152 CT Crimps center pin to .068" hex, RG174 ferrule to .178" hex and 8281 ferrule to .324" hex. 2100-52 Die Set only



2153 CT Crimps center pin to.042" hex, RG58 ferrule to .213" hex and R59 ferrule to .255" hex. 2100-53 Die Set only



2154 CT Crimps center pin to .042" square or .068" hex, RG58 ferrule to .190" hex and RG59 ferrule to .213" hex on plenum coaxial cable. 2100-54

Die Set only



2164 CT Crimps center pin to .068" hex, RG59 ferrule to .255" hex and 8281 ferrule to .324" hex. 2100-64 Die Set only




2165 CT
Crimps center pin to .042" square or .068" hex, RG174 ferrule to .100" or .128" hex and RG174 ferrule to .178" hex.
2100-65
Die Set only

**NOTE** Refer to the Coaxial Tool Selection Chart on page 46 to nd more coaxial tool options.

## **AUTOMOTIVE**

Weather Pack Crimp Tools
Metri-Pack, Micro-Pack & GT Crimp Tools
Terminal Repair Crimp Tools & Tool Kit
Power Crimp Tools
Battery Connectors, Lug & Terminal Crimp Tools

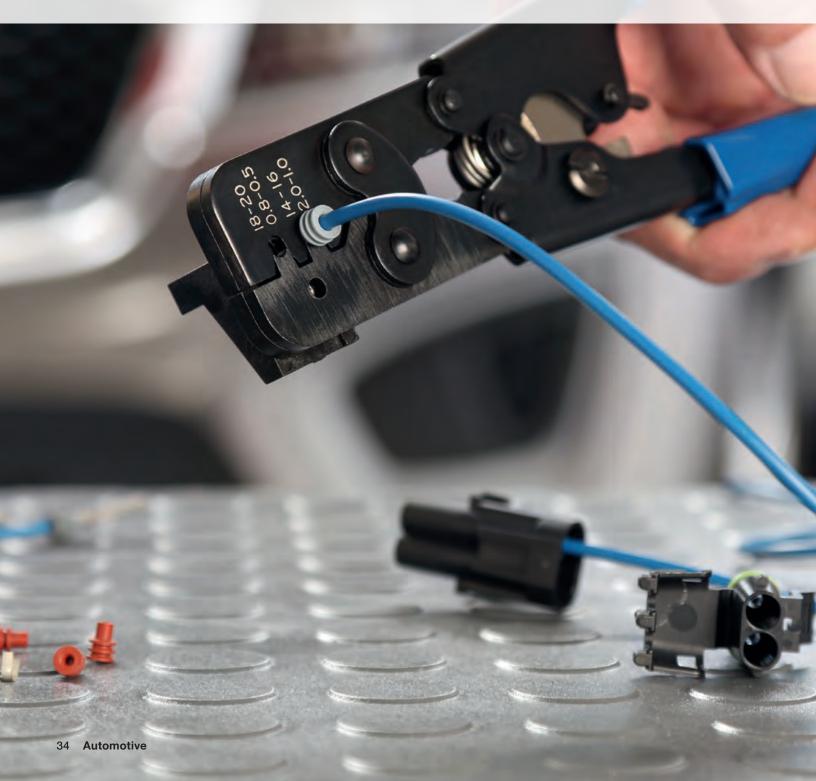

# AUTOMOTIVE WEATHER PACK CRIMP TOOLS



# Weather Pack Terminals Crimp Tool, short handle

3138 CT

- 20-18 AWG & 16-14 AWG
- Ratcheted for positive performance









# Weather Pack Two Cavity Crimp Tool

3181 CT

- 20-10 AWG
- Spring loaded
- Same as GM 06285847









# Weather Pack Terminals Crimp Tool, long handle

3183 LCT

- •20-14 AWG & 16-14 AWG
- Includes locator to orient contacts
- Same as GM 12014254









# Weather Pack Terminals 20–14 AWG Crimp Tool

3186 CT

- Five Cavities
- Ratcheted for positive performance
- Same as GM 12085270









# Weather Pack Terminals 20–14 AWG Crimp Tool

3301 WPCT

- One tool for crimping terminal core wings and seal wings
- Separate cavities for precise crimping (14-16 AWG & 18-20 AWG)
- Included in Terminal Repair Kit 3330 TRK









#### Weather Pack Terminals 12–10 AWG Crimp Tool

3302 WPCT

- One tool for crimping terminal core wings and seal wings
- Separate cavities for precise crimping (10 AWG & 12 AWG)
- Included in Terminal Repair Kit 3330 TRK







GM TOOL NUMBER	SARGENT® TOOL NUMBER		
GM06285847	3181 CT		
GM08913440	3182 LCT		
GM12014254	3183 LCT		
GM12039500	3188 CT		
GM12070947	3184 LCT		

GM TOOL NUMBER	SARGENT® TOOL NUMBER
GM12071687	3185 CT
GM12085115	3190 CT
GM12085270	3186 CT
GM12085271	3187 CT
GM12155975	3189 CT

#### **AUTOMOTIVE**

### **METRI-PACK, MICRO-PACK & HEAT SHRINK CONNECTORS**



# Circular Contact Sealed Splices +

3104 DSCT

- Same as GM 12085115
- Ratcheted crimp tool
- Crimp Metri-Pack unsealed terminals and heat shrink splices and "C" clips









## Metri-Pack Unsealed Crimp Tool

3184 LCT

- Core & insulation wings crimped in single motion
- Spring loaded clip holds and positions terminal
- Same as GM 12070947









# Metri-Pack Packard Style Crimp Tool

3185 CT

- Crimps Metri-Pack 480 & 630 sealed connectors
- 10TRK12 AWG
- Same as GM 12071687









# Metri-Pack 280 Unsealed Crimp Tool

3187 CT

- Five cavities
- 22 12 AWG
- Same as GM 12085271









### Metri-Pack Sealed & Unsealed

3188 CT

- Crimps Core and Insulation
- Ratcheted for positive performance
- Built-in locator to orient contacts
- Same as GM 12039500









### Metri-Pack 150 & 280 Sealed Terminal Crimp Tool

3189 CT

- Same as GM 12155975
- 20-14 AWG
- Core and seal are crimped in two separate motions









# Heat Shrink, Splice & "C" Clips Ratchet Crimp Tool

3190 CT

- Same as GM 12085115
- Ratcheted crimp tool
- Crimp Metri-Pack unsealed terminals and heat shrink splices









# Metri-Pack Packard Style Crimp Tool

3303 64CT

- Crimps Micro-Pack .64, 100 & 100W and GT 630 terminals
- Crimps core and/or insulation wings depending on terminal
- Included in Repair Kit 3330 TRK









# Metri-Pack, Micro-Pack & GT Unsealed Crimp Tool

3305 MPCT

- Crimps Metri-Pack 150, 280, 480, & 630;
   Micro-Pack .64 & 100 and GT 150, 280 & 630 terminals
- Included in Repair Kit 3330 TRK









# Metri-Pack, Micro-Pack & GT Sealed Crimp Tool

3306 MPCT

- Crimps Metri-Pack 150, 280, 480, & 630;
   Micro-Pack .64 & 100 and GT 150, 280 & 630 terminals
- Included in Repair Kit 3330 TRK









## Automotive Terminal Repair Crimp Tool Kit

3330 TRK

#### Five terminal crimping tools cover

- Weather Pack 20, 18, 16, 14, 12 & 10 AWG terminals
- Micro-Pack .64, 100 & 100W and GT 150, 280 & 630 terminals
- Metri-Pack 150, 280, 480 & 630

#### Includes

- 3301 WPCT Weather Pack Terminals 20-14 AWG Crimp Tool
- 3302 WPCT Weather Pack Terminals 12-10 AWG Crimp Tool
- 3303 64CT Micro-Pack .64 mm Contact Crimp Tool
- 3305 MPCT Metri-Pack Unsealed Crimp Tool
- 3306 MPCT Metri-Pack Sealed Crimp Tool
- Terminal Repair Manual, 32 Pages:
- OEM terminal number/tool number matrix
- Detailed terminal replacement and quality check procedures

#### **AUTOMOTIVE**

### **TERMINAL REPAIR CRIMP TOOLS**



#### **Open Barrel Contact Crimp Tool**

1026 CT

- Crimps a wide variety of open barrel contacts in small size wire ranges
- "Oval" type insulation crimps are produced in two cavities: A 20-16 AWG and B 30-22 AWG
- "B" type conductor crimps are produced in three cavities: C 18-16 AWG, D 22-20 AWG and E 30-24 AWG









#### **B Type Medium Size Wire Crimp Tool**

1028 CT

- Crimps a wide variety of open barrel contacts in medium size wire ranges.
- Insulation crimps are "B" type and are produced in two cavities: A 18-14 AWG and B 24-20 AWG
- · Conductor crimps are "B" type and are produced in three cavities: C 16-14 AWG, D 20-18 AWG and E 24-22 AWG









### **Heat Shrink Sealed Splices**

3104 DSCT

- Same as GM 12085115
- Ratcheted crimp tool
- Crimp Metri-Pack unsealed terminals and heat shrink splices









#### **Circular Contacts Ratchet Crimp Tool**

3107 DTCT

- Three cavities: 20, 16 & 12 AWG
- Ratcheted for positive performance









#### Ratchet Conductor **Crimp Tool**

3120 CT

- Three cavities: Red 22-16 AWG, Blue 16-14 AWG & Yellow 12-10 AWG
- Crimps conductor portion of insulated terminals







### Unsealed 20-14 AWG, **One Step Crimp Tool**

3182 LCT

- Same as GM 08913440
- Crimps Packard 56, 58 & 59 Series connectors
- Core & insulation wings crimped in single
- Spring loaded clip holds and positions terminal









## Circular Contacts Super Crimp Tool

2186 CT

- Crimps commercial grade solid circular pins and sockets in three cavities: 20, 16 & 12 AWG
- Fine blanked high carbon steel construction dies
- Jaws accept other dies for additional applications









#### **Power Crimp Tool**

6220 CT

- Crimps conductor portion of insulated and non-insulated terminals
- Four cavities: 8, 6, 4 & 2 AWG
- Cavities are identi ed by wire size and product type









#### Multi Function Electrical Crimper, Stripper, Wire & Bolt Cutter

1020 CT

#### **Cutters**

- Two cutters
- Anvil type nose cutter conveniently up front for tight spaces
- Scissor type cutter located behind the pivot point minimizes distortion when cutting stranded wire

#### **Crimps**

- Crimps automotive "F" type ignition terminals 7–8 mm size in one cavity
- Crimps conductor portion of insulated terminals and splices.
- Crimps Red 22-16 AWG, Blue 16-14 AWG & Yellow 12-10 AWG
- Crimps non-insulated terminals and splices

#### **Strips**

- Precision ground scissor type wire stripper provides a clean nick free strip on 8 AWG solid to 22 AWG stranded
- Cavities are marked by wire sizes and "solid" or "stranded"







#### AUTOMOTIVE

#### **BATTERY LUG CRIMP TOOLS**

- · Precision machined crimping cavities
- · No dies to move or switch
- · 19" tool length for maximum leverage and mechanical advantage
- · Ergonomic cushioned grips remain comfortable
- · Easy to adjust
- · Designed to exceed tensile strength requirements



## B-Crimp Tool for Lead-Free Open Barrel Terminals

6225 CT

- · Positive contact and excellent durability
- OEM style crimp superior mechanical strength and electrical conductivity







NEST	OPEN BARREL CONNECTORS
Α	2–6 AWG Conductor
В	2–6 AWG Insulation
C	4-6 AWG Conductor 1-2 AWG Insulation



#### Crimp Tool for Cast Heavy Duty Tube Lugs & Terminals and Standard Wall Lugs

6226 CT

- Square shaped crimp for positive electrical contact and excellent pull resistance
- · Dual cavity







NEST	CAST BATTERY TERMINAL/LUG	HEAVY WALL TERMINAL/LUG	STANDARD WALL LUG
250 MCM	4/0 AWG	4/0 AWG	
4/0		3/0 AWG	4/0 AWG

### B-Crimp Tool for Lead-Free Open Barrel Terminals Bench Mount Design

#### 6225 CT BM

- · Positive contact and excellent durability
- · OEM style crimp superior mechanical strength and electrical conductivity
- Bench mount design best for production assemblies









NEST	OPEN BARREL CONNECTORS			
Α	2–6 AWG Conductor			
В	2–6 AWG Insulation			
С	4–6 AWG Conductor, 1–2 AWG Insulation			



#### Crimp Tool for Cast Heavy Duty Tube Lugs & Terminals and Standard Wall Lugs

6227 CT

- · Square shaped crimp for positive electrical contact and excellent pull resistance
- · Triple cavity







NEST		HEAVY WALL TERMINAL/LUG	STANDARD WALL LUG	
4/0	3/0, 2/0	3/0, 2/0	3/0 AWG	
2/0		1, 1–2, 2	2/0, 1/0	
1/0	1–2		1 AWG	



### Crimp Tool for Cast Heavy Duty Tube Lugs & Terminals and Standard Wall Lugs

6228 CT

- · Square shaped crimp for positive electrical contact and excellent pull resistance
- · Four cavity







NEST	CAST BATTERY TERMINAL/LUG	HEAVY WALL TERMINAL/LUG	STANDARD WALL LUG
1/0			1 AWG
2		4,6 AWG	2 AWG
4	4,6 AWG		4,6,8 AWG
6		8 AWG	

Wire Rope Cutting Tools Wire Rope Swaging Tools



### WIRE ROPE

### **CUTTING AND SWAGING TOOLS**



#### **Wire Rope Cutter**

9509 WRC

- Cuts up to 3/16" diameter cable straight and clean with one hand
- Uniquely shaped cavity holds and cuts in one stroke and eliminates frayed ends
- Durable steel handles with cushioned grips
- · Handy closing latch for safe carrying
- 7.5" length



#### Wire Rope Cutter

1600 WRC

- Cuts up to 1/4"
- Compound action for increased leverage and mechanical advantage
- High carbon, heated treated steel jaws and pivots with black oxide finish
- Strong, light weight composite handles are easier to carry
- 12.5" length



# Hand Held 3/32" Ratcheted Wire Rope Swager

3103 ST

- 3/32" Single Cavity
- Terrific for small sleeves
- Ratcheted for top performance
- High carbon, heat-treated jaws for durability
- Buffed nest cavities resist sleeve sticking
- Easy adjusted in the field
- 11" length



# Hand Held Wire Rope Swager 6280 CT

- 1/32", 1/16", 3/32", 1/8", 5/32" & 3/16"
- Compound action for increased leverage and mechanical advantage
- High carbon, heat-treated jaws for durability
- Buffed nest cavities resist sleeve sticking
- Easy adjusted in the field
- 18" length



# Hand Held Compound Action Wire Rope Swager

6260 CT

- Crimp 1/32", 3/64", 1/16", 3/32" & 1/8"
- Steel handle
- 16" length



# Hand Held Compound Action Wire Rope Swager

6260 CCT

- Crimp 1/32", 3/64", 1/16", 3/32" & 1/8"
- Composite handle
- 16" length



### **Bench Mounted Wire Rope Swager**

6260 BM CT/6280 BM CT

- 6260 BM CT: 1/32", 3/64", 1/16", 3/32" & 1/8"
- 6280 BM CT: 1/32", 1/16", 3/32", 1/8", 5/32" & 3/16"
- Precision machined, light-weight aluminum base
- · High carbon, heat-treated jaws for durability
- Buffed nest cavities resist sleeve sticking
- Over center handle motion assures complete crimp cycle
- Easily adjusted in the field
- Ribbed grip is excellent in wet conditions

# INDUSTRIAL

Pliers Punches



# INDUSTRIAL PLIERS AND PUNCH TOOLS



#### **Side Cutting Plier**

1026

- Tough, high carbon, serrated jaws are heat treated and nickel plated
- Parallel action jaws and "V" slots hold and straighten wire, pins, etc.
- Open throated design allows passage of long wire through the center of the handles
- Compound cutter provides clean, sharp cuts
- Versatile design for numerous industrial applications

MODEL	TOOL LENGTH	JAW OPENING	JAW WIDTH	
1026	6 1/2"	1/2"	3/8"	



#### **Side Cutting Plier**

1028

- Tough, high carbon, serrated jaws are heat treated and nickel plated
- Parallel action jaws and "V" slots hold and straighten wire, pins, etc.
- Open throated design allows passage of long wire through the center of the handles
- Compound cutter provides clean, sharp cuts
- Versatile design for numerous industrial applications

MODEL	TOOL LENGTH	JAW OPENING	JAW WIDTH	
1028	8"	5/8"	1/2"	



### Parallel Action Flat Nose Plier

1006

- Tough, high carbon, serrated jaws are heat treated and nickel plated
- Open throated design allows passage of long wire through the center of the handles
- Versatile design for numerous industrial applications

MODEL TOOL LENGT		JAW OPENING	JAW WIDTH	
1006	1006 6 ½"		3/8"	



### Parallel Action Flat Nose Plier

1008

- Tough, high carbon, serrated jaws are heat treated and nickel plated
- Open throated design allows passage of long wire through the center of the handles
- Versatile design for numerous industrial applications

MODEL	TOOL LENGTH	JAW OPENING	JAW WIDTH	
1008	8"	5/8"	1/2"	



## Heavy Duty Paper and Film Punch

1406 S

- Easily punches through all types and thicknesses of paper and film
- Adjustable stop for easy medium alignment
- Dual spring loaded in the open position

### TOOL SELECTION CHARTS

Select cable/wire style in left hand column, follow rows across t nd tools.

#### **Coaxial Tool Selection Chart**

Crimp Tool  Cable/ Wire Style	4256 CT 4156 CT	1056 CT 2151 CT 2153 CT 2154 CT 3151 CT 4166 CT 4167 CT 4266 CT 4267 CT 6566 CT	2164 CT	4167 CT 4169 CT 4170 CT 4178 CT 4267 CT 4269 CT 4270 CT 4278 CT	4272 CT 4172 CT	2152 CT 2165 CT	3150 CT	3162 CT
RG6					•		•	•
RG8								
RG11								•
RG58	•	•		•				
RG59	•	•	•		•		•	•
RG174 Mini Coax	•					•		
Belden 8281 (RG59U)			•					

### **Cable Preparation/Strip Tool Selection Chart**

Strip Tool Cable/Wire Style	8400 8450 8530 S 8646 QS <sup>1</sup> 8730 ES	8105 MT 8200 8300 8500 S 8641 QS <sup>2</sup> 8643 QS <sup>2</sup> 8700 ES 8750 ES	8710 ES	8120 MT 8640 QS 8642 QS <sup>2</sup> 8720 ES	8140 MT 8645 QS <sup>3</sup> 8740 ES	8170 MT 8644 QS <sup>2</sup> 8770 ES	8175 MT	8145 MT 8647 QS <sup>3</sup>	8760 ES	8185 MT	8790 MT
UTP (Cat5, Cat5e, Cat6)	•				•		•	•			•
RG11/7			•	•				•			
RG6/59		•		•	•	•	•	•		•	
RG174 Mini Coax						•	•				•
RG59/6 EZF										•	
RG58/59 to .235" × .235"									•		

<sup>1</sup> also cuts UTP, 2 also cuts RG59/6, 3 also cuts UTP & RG59/6

### PRODUCT NUMBER INDEX

TOOL NUMBER	PAGE
1006	45
1008	45
1020 CT	15, 39
1026	45
1026 CT	38
1027 CT	13
1028	45
1028 CT	38
1056 CT	23, 46
1406 S	45
1600 WRC	43
2100 Series	10, 33
2100	10, 31, 33
2100-06	31
2100-06lb	31
2100-08	31
2100-10	31
2100-10	11
2100-27	11
2100-42	10
2100-51	11, 33
2100-52	11, 33
2100-52	11
2100-54	11, 33
2100-64	11, 33
2100-65	11, 33
2100-75	11
2100-79	11
2100-82	10
2100-83M	10
2100-84	11
2100-86M	10
2124 CT	11
2127 CT	11
2142 CT	10
2151 CT	11, 33, 46
2152 CT	11, 33, 46
2153 CT	11, 33, 46
2154 CT	11, 33, 46
2164 CT	11, 33, 46
2165 CT	11, 33, 46
2175 CT	11
2179 CT	11
2182 CT	10
2183 MCT	10
2184 CT	11
2186 CT	10, 39
3100 Series	12
3103 ST	43
3104 DSCT	36, 38
3107 DTCT	38
3120 CT	12, 38
3122 CT	12
3125 CT	12
3126 CT	13
	I

TOOL NUMBER	PAGE
3127 CT	16
3128 CT	13
3131 CT	16
3132 CT	16
3133 CT	16
3134 CT	16, 17
3135 CT	16, 17
3136 CT	16, 17
3137 CT	16, 17
3138 CT	35
3140 CT	12
3145 CT	12
3150 CT	21, 46
3151 CT	21, 46
3161 CT	21, 46
3162 CT	
3181 CT	21, 46
	35
3182 LCT	35, 38
3183 LCT	35
3184 LCT	35, 36
3185 CT	35, 36
3186 CT	35
3187 CT	35, 36
3188 CT	35, 36
3189 CT	35, 36
3190 CT	35, 37
3301 WPCT	35, 37
3302 WPCT	35, 37
3303 64CT	37
3305 MPCT	37
3306 MPCT	37
3330 TRK	35, 37
4100 Series	6, 32
4100	6, 22, 32
4100-20	8
4100-25	8
4100-35	8
4100-36	8
4100-37	8
4100-40	8
4100-41	8
4100-56	9, 32
4100-65	6, 9, 22, 32
4100-66	6, 9, 22, 32
4100-67	6, 9, 22, 32
4100-69	6, 9, 22, 32
4100-03	9, 32
4100-70	9, 32
4100-75	8
4100-76	9
4100-78	9, 32
4100-82	8
4100-83	8
4100-84	8
	8

TOOL NUMBER	PAGE
4125 CT	8
4135 CT	8
4136 MCT	8
4137 MCT	8
4140 CT	8
4141 CT	8
4156 CT	9, 32, 46
4165 CT	9, 32
4166 CT	9, 32, 46
4167 CT	9, 32, 46
4169 CT	9, 32, 46
4170 CT	9, 32, 46
4172 CT	9, 22, 46
4175 CT	8
4176 CT	9
4178 CT	9, 32, 46
4182 CT	8
4183 MCT	8
4184 CT	8
4185 CT	8
4200 Series	6, 32
4200	6, 32
4220 CT	8
4225 CT	8
4235 CT	8
4236 MCT	8
4237 MCT	8
4240 CT	8
4241 CT	8
4256 CT	9, 32, 46
4265 CT	9, 32
4266 CT	9, 32, 46
4267 CT	9, 32, 46
4269 CT	9, 32, 46
4270 CT	9, 32, 46
4272 CT	9, 22, 46
4275 CT	8
4276 CT	9
4278 CT	9, 32, 46
4282 CT	8
4283 MCT	8
4284 CT	8
4285 CT	8
4290 CT	5
4295 CT	5
4296 CT	5
6220 CT	5, 39
6225 CT	40
6225 CT BM	40
	40
6226 CT	
6227 CT	41
6228 CT	41
6260 BM CT	43
6260 CCT	43
6260 CC1	43

TOOL NUMBER	PAGE
6280 BM CT	43
6280 CT	43
6500 Series	14
6500	14
6525 CT	14
6530 CT	14
6540 CT	14
6541 CT	14
6566 CT	14, 23, 46
7100 Series	30
7100	30, 31
7100-04	30, 31
7100-06	29, 30, 31
7100-08	29, 30, 31
7100-10	30, 31
	30
7100 CS	
7104 CT	30
7106 CT	30
7108 CT	30
7110 CT	30
7500 Series	30
7500	30
7504 CT	30
7506 CT	30
7508 CT	30
7510 CT	30
7868 CT Series	29
7868 CT	29
8100 MT Series	25
8105 MT	25, 46
8120 MT	25, 46
8140 MT	25, 46
8145 MT	25, 46
8170 MT	25, 46
8175 MT	25, 46
8185 MT	25, 46
8200	26, 46
8300	6, 22, 26, 46
8400 Series	26
8400	26, 46
8450	26, 46
8500 Series	26
8500 S	26, 46
8530 S	26, 46
8600 Series	27
8600-RB	27
8640 QS	27, 46
8641 QS	27, 46
8642 QS	27, 46
8643 QS	27, 46
8644 QS	27, 46
8645 QS	27, 46
8646 QS	27, 46
8647 QS	27, 46
8650 WW	15

TOOL NUMBER	PAGE
8700 Series	25
8700-00	25, 27
8700-10	25, 27
8700-15	25, 27
8700-25	25, 27
8700-30	25, 27
8700-50	25
8700-60	25
8700-70	25, 27
8700 ES	25, 46
8700 RB	25
8710 ES	25, 46
8710 RB	25
8715 RB	25
8720 ES	25, 46
8725 RB	25
8730 ES	25, 46
8730 RB	25
8740 ES	25, 46
8750 ES	25, 46
8750 RB	25
8760 ES	25, 46
8760 RB	25
8770 ES	25
8770 RB	25
8780 ES	25
8790 ES	25
8790 MT	46
8800 Series	20
8800 US	20
8810 US	20
8820 US	20
9000 Series	20
9000 US	20
9010 US	20
9030 Series	20
9030 US	20
9035 US	20
9504 QC	15
9509 WRC	43
9800 Series	20
9800 US	20
9810 US	20
9820 US	20
SAR-200 CS	19
SAR-200 US	19
SAR-300 CS	19
SAR-300 US	19
TK 2770	31
TK 4150	6, 22
TK 7100	31

### Oetiker Tool Corp.

# Manufacturer of Sargent Quality Tools, Member of the Oetiker Group



Oetiker is a global provider of connecting and assembly solutions for vehicles and industrial applications.

At Oetiker, we contribute to an endless array of real-world customer needs with innovative reliable connections.

With over 70 years of worldwide experience, we design, we test and we deliver high quality connections daily at Oetiker that are simpler, smarter and stronger than ever before. We manufacture at twelve locations on three continents. Always in close proximity to our customers. Always in accordance with unified quality standards far above norm.

### **Oetiker Tool Corp.**

30 East Industrial Rd.
Branford, CT 06405 USA
Phone +01 203 488 8665
Fax +01 203 488 6497

Email orders.us.branford@oetiker.com

www.sargenttools.com www.oetiker.com



### **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

### Sargent Tools:

3133CT 7108CT 3134CT 3132CT 3152CT 3140CT 3135CT 7106CTJ 8710RB 6530CT 3127CT 3151CT 3128CT 7506CTJ 3155CT 8700RB 3125CT 3131CT 6525CT 3150CT 6541CT 7508CT 3137CT 2100-06LB 6540CT 3145CT 3126CT 3122CT 6500 8500 S 8170 MT 7100-06 7100-08 7100-04 2100-54 7100-10 2100-29 1026 1028 6500-41 6500-66 6500-25 6500-30 6500-40 3127-20 2000-15 2000-18 1S26 1006A-HANDLE 8105 MT 8120 MT 8140 MT 8145 MT 8175 MT 8185 MT 8530 S 8700-70 8700-80 8105-08 MTT 8120-08 MTT 7868 CT 8600 RB 8640 QS 8641 QS 8642 QS 8643 QS 8644 QS 8645 QS 8646 QS 8647 QS 8650 WW 8700-15 8700-25