



60 Watt Universal 2-Wire Input Adapter PSAA60W Power Supply Meets EISA & Ecodesign Requirements



Features

- Low Cost
- Efficiency Level V Compliance⁽¹⁾
- Class B EMI
- Ecodesign ErP Directive 2009/125/EC level 2 annex 1b Compliant⁽¹⁾
- Non-vented/Spill-proof Case
- No Load Power consumption <0.5W
- Low Profile Design
- EISA Compliant

Applications

- Portable Equipment
- Peripherals
- Networking
- Gaming Machines

Safety Approvals

- cUL/UL
- CE
- TÜV

Mechanical Characteristics

- Length: 130mm (5.12in)
- Width: 60mm (2.36in)
- Height: 32mm (1.30in)
- Weight: 300g (10.58oz)

Output Specifications

Model	DC Output Voltage	Load		Ripple ⁽²⁾ P-P (max.)	Regulation Line & Load	Efficiency Level ⁽³⁾
		Min.	Max.			
PSAA60W-120	+12V	0A	5.0A	120mV	±5%	IV
PSAA60W-150	+15V	0A	4.0A	150mV	±5%	V
PSAA60W-180	+18V	0A	3.3A	180mV	±5%	V
PSAA60W-240	+24V	0A	2.5A	240mV	±5%	V
PSAA60W-480	+48V	0A	1.25A	480mV	±5%	V

(1) Excludes 12V model which remains Level IV. Products not meeting requirements for Ecodesign Directive may not longer be shipped to the European Union for commercial or consumer purposes.

(2) Measured after 10 minutes warm up at 25°C with 12-inch twisted pair terminated with a 10uF capacitor and 0.1uF ceramic in parallel.

(3) 15V-48V models may be marked as Level IV despite Level V compliance. If Level V marking is required, please contact Phihong directly to ensure stock is marked accordingly.

Phihong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at www.phihong.com for the most up-to-date specifications and contact information.

Input:
AC Input Voltage Rating

100 to 240V AC

AC Input Frequency

47 to 63Hz

Input Current

1.6A at 100V AC

0.7A at 240V AC

Leakage Current

0.25mA maximum at 254V AC and 60Hz

Inrush Current

90A maximum at 100V AC

150A maximum at 240V AC

Input Power Saving

<0.5W at no load

Output:
Output Power

60W

Efficiency

Meets Level V efficiency requirements

Environmental:
Temperature

Operation 0 to +40°C

Non-operation -20 to +80°C

Humidity 10 to 90%

Emissions

FCC Class B

EN55022 Class B

VCCI Class B

Immunity

IEC61000-4-2

IEC61000-4-3

IEC61000-4-4

IEC61000-4-5

IEC61000-4-6

IEC61000-4-11

EN61000-3-2

Over-Voltage Protection

Circuit will latch then auto-restart.

Over-Current Protection

Circuit will latch

Short-Circuit Protection

Output can be shorted permanently without damage

Isolation

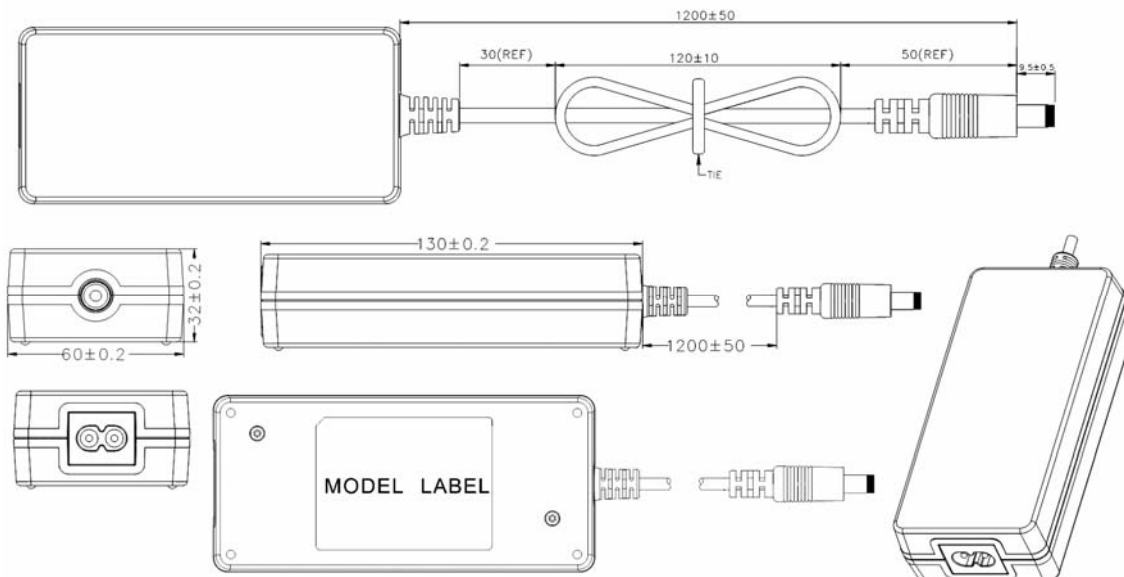
Primary to Secondary: 500V DC >100M OHM

Dielectric Withstand (Hi-pot) Test

Primary to Secondary: 3000V AC for 1 min., 10mA

DC Output Connector

2.1 x 5.5 x 9.5mm Center Positive Barrel

Dimension Diagram Unit: mm (inch)


Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Phihong:

[PSAA60W-240-R](#) [PSAA60W-180-R](#) [PSAA60W-150-R](#) [PSAA60W-120-R](#) [PSAA60W-480-R](#)