


PRODUCT BRIEF


Intel® Ethernet Converged Network Adapter X520

with Support for SFP+ Connections
Network Connectivity



Intel® Ethernet Converged Network Adapter X520

Dual- and Single-Port 10 Gigabit SFP+ Ethernet Converged Network Adapters Provide Ultimate Flexibility and Scalability in Virtual and Unified Storage Environments

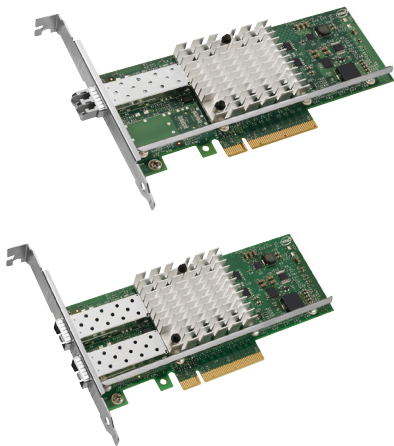

Overview

Intel's family of adapters, the Intel® Ethernet Converged Network Adapter X520 with SFP+ connectivity, are the most flexible and scalable Ethernet adapters for today's demanding data center environments. Data center networks are being pushed to their limits. The escalating deployments of servers with multi-core processors and demanding applications such as High Performance Computing (HPC), database clusters, and video-on-demand are driving the need for 10 Gbps connections. Customers require flexible and scalable I/O solutions to meet the rigorous requirements of running mission-critical applications in virtualized and unified storage environments.

Powered by Intel's third-generation 10 GbE network controller, the Intel® Ethernet 82599 10 Gigabit Ethernet Controller, the X520 adapter family addresses the demanding needs of the next-generation data center by providing unmatched features for virtualization, flexibility for LAN and SAN networking, and proven, reliable performance.

Best Choice for Virtualization

The explosive growth in virtualization is leading to an increasing demand for network performance. With more Virtual Machines (VMs) running on each multi-core server, networking traffic is dramatically increased, with each VM competing for available I/O bandwidth. Intel's family of Intel Ethernet Converged Network Adapter X520 addresses networking

bottlenecks in virtualized environments. These adapters enable network-intensive applications to achieve the performance expected in a virtualized environment.

The Intel Ethernet X520 family of adapters provides the best networking performance available in the industry, whether the physical port is configured in an emulation mode using the virtual switch in the Virtual Machine Monitor (VMM), or is directly assigned to a virtual machine. In the emulation mode, Intel's I/O technology, Virtual Machine Device queues¹ (VMDq) optimizes network performance by offloading data sorting and copying from the software Virtual Switch in the VMM to the Intel Ethernet 82599 10 Gigabit Controller. This configuration is best suited for a large number of VMs running standard applications that have limited bandwidth and latency requirements.

For mission-critical applications, where dedicated I/O is required for maximum network performance, users can assign a dedicated virtual adapter port to a VM. Using the PCI-SIG SR-IOV capability on an Intel Ethernet X520 adapter provides direct VM connectivity and data protection across VMs. SR-IOV technology enables the data to bypass the software virtual switch and provides near-native performance. It assigns either physical or virtual I/O ports to individual VMs directly. This technology is best suited for applications that demand the highest I/O throughput and lowest latency performance such as database, storage, financial and other applications.

PCI-SIG SR-IOV is a mechanism for devices to advertise their ability to be directly assigned to multiple virtual machines. SR-IOV enables the partitioning of a PCI Express* (PCIe) function into many virtual interfaces for the purpose of sharing the resources of a PCIe device in a virtual environment. These virtual interfaces are called Virtual Functions. Each virtual function can support a unique and separate data path for I/O-related functions within the PCIe hierarchy. Use of SR-IOV with a networking device, for example, enables the bandwidth of a single port (function) to be partitioned into smaller slices that can be allocated to specific VMs, or guests, via a standard interface.

The Intel Ethernet X520 family of adapters delivers the same functionality and throughput as ten dual-port, one gigabit adapters, saving cost, power, and complexity. For more information on virtualization please go to: www.intel.com/go/vtc.

Unified Networking and Storage

The family of Intel Ethernet X520 adapters lowers your data center total cost of ownership (TCO) by providing the ability to route LAN and SAN traffic over a single fabric.

Support for Fiber Channel over Ethernet (FCoE)

FCoE encapsulates Fiber Channel frames over standard Ethernet networks, enabling Fiber Channel to take advantage of 10 GbE networks while preserving its native protocol. The X520 adapters offer FCoE hardware acceleration to provide performance comparable to FC HBAs. The adapters support Data Center Bridging, also known as Converged Enhanced Ethernet (CEE), which enables customers to configure traffic classes and priorities to deliver a lossless Ethernet fabric. An Intel Ethernet Converged Network Adapter X520 reduces TCO by eliminating redundant fabrics and saves the cost of expensive FC HBAs and FC switch ports.

Support for iSCSI

The adapters provide complete support for proven native OS and VMM iSCSI initiators as well as iSCSI boot. Historically, CRC32C computation has degraded system performance, but now with the CRC instruction set included in the latest Intel® Xeon® processors, CRC validation is possible with minimal impact to network throughput while delivering superior data integrity.

The Intel Ethernet family of X520 adapters do it all: 10 Gigabit LAN, FCoE, and iSCSI; truly delivering on the promise of unified networking.

Reliable Performance

The family of X520 adapters includes a number of advanced features that enable it to provide industry-leading performance and reliability.

Security Optimizations

The adapters support IPsec offload for Microsoft's* Network Access Protection (NAP), Active Directory,* and future security capabilities in Windows 7*. An X520 adapter enables customers to run a secure network environment without sacrificing performance.

PCIe v2.0 (5 GT/s)

PCIe v2.0 (5 GT/s) support enables customers to take full advantage of 10 GbE by providing a maximum of 20 Gbps bi-directional throughput per port on a single dual port card.

Designed For Multi-core Processors

Support for technologies such as multiple queues, receive-side scaling, multiple MSI-X vectors, and Low Latency Interrupts enable the X520 adapters to provide high-performance, 10 Gigabit connectivity in multi-core server blades. These technologies distribute network processing across multiple CPU cores, improving overall performance.

For today's demanding virtualized data center environments, the new family of X520 adapters deliver ultimate flexibility and scalability.

| Features | Benefits |
|---|---|
| General | |
| Intel® 82599 10 Gigabit Ethernet Controller | <ul style="list-style-type: none"> Industry-leading, energy-efficient design for next-generation 10 Gigabit performance and multi-core processors |
| SFP+ Connectivity | <ul style="list-style-type: none"> X520 Adapters with SFP+ connections support 10GBASE-SR, 10GBASE-LR and SFP+ Copper Direct Attach physical media. |
| Low-profile | <ul style="list-style-type: none"> Enables higher bandwidth and throughput from standard and low-profile PCIe slots and servers |
| Load balancing on multiple CPUs | <ul style="list-style-type: none"> Increases performance on multi-processor systems by efficiently balancing network loads across CPU cores when used with Receive-Side Scaling (RSS) from Microsoft or Scalable I/O on Linux* |
| iSCSI remote boot support | <ul style="list-style-type: none"> Provides centralized storage area network (SAN) management at a lower cost than other iSCSI solutions |
| Fibre Channel over Ethernet (FCoE) Support | <ul style="list-style-type: none"> Includes FCoE Boot and Data Center Bridging |
| Support for most network operating systems (NOS) | <ul style="list-style-type: none"> Enables widespread deployment |
| RoHS-compliant ² | <ul style="list-style-type: none"> Complies with the European Union directive 2002/95/EC to reduce the use of hazardous materials |
| Intel® PROSet Utility for Windows* Device Manager | <ul style="list-style-type: none"> Provides point-and-click management of individual adapters, advanced adapter features, connection teaming, and virtual local area network (VLAN) configuration |
| Time Sync (IEEE 1588*, 802.1as) | <ul style="list-style-type: none"> Enables networked Ethernet equipment to synchronize internal clocks according to a network master clock; endpoint can then acquire an accurate estimate of the master time by compensating for link latency |

| Features | Benefits |
|----------|----------|
|----------|----------|

I/O Features for Multi-core Processor Servers

| | |
|--|--|
| Intel® Direct Cache Access (DCA): | <ul style="list-style-type: none"> Enables the adapter to pre-fetch the data from memory, avoiding cache misses and improving application response time |
| MSI-X support | <ul style="list-style-type: none"> Minimizes the overhead of interrupts load-balancing of interrupt handling between multiple cores/CPU's |
| Low Latency Interrupts | <ul style="list-style-type: none"> Based on the sensitivity of the incoming data, the adapter can bypass the automatic moderation of time intervals between the interrupts |
| Header Splits and Replication in Receive | <ul style="list-style-type: none"> Helps the driver focus on the relevant part of the packet without the need to parse it |
| Multiple Queues: 128 Tx and Rx queues per port | <ul style="list-style-type: none"> Network packet handling without waiting or buffer overflow providing efficient packet prioritization |
| Tx/Rx IP, SCTP, TCP, and UDP checksum offloading (IPv4, IPv6) capabilities | <ul style="list-style-type: none"> Lower processor usage Checksum and segmentation capability extended to new standard packet type |
| Tx TCP segmentation offload (IPv4, IPv6) | <ul style="list-style-type: none"> Increased throughput and lower processor usage Compatible with large-send offload feature (in Microsoft Windows* Server operating systems) |
| Receive and Transmit Side Scaling for Windows environment and Scalable I/O for Linux* environments (IPv4, IPv6, TCP/UDP) | <ul style="list-style-type: none"> This technology enables the direction of the interrupts to the processor cores in order to improve the CPU usage rate |
| IPsec Offload | <ul style="list-style-type: none"> Offloads IPsec capability onto the adapter instead of the software to significantly improve I/O throughput and CPU usage (for Windows* 2008 Server, Vista*, Windows* 2008 Server R2, and Windows* 7) |
| MacSec | <ul style="list-style-type: none"> IEEE spec: 802.1ae Layer 2 data protection that provides encryption and authentication ability between two individual devices (routers, switches, etc.) MacSec is designed into the network adapter hardware. These adapters are prepared to provide MacSec functionality when the ecosystem is ready to support this new technology |

Virtualization Features

| | |
|---|--|
| VMDq | <ul style="list-style-type: none"> Offloads the data-sorting functionality from the Hypervisor to the network silicon, improving data throughput and CPU usage Provides QoS feature on the Tx data by providing round-robin servicing and preventing head-of-line blocking Sorting based on MAC addresses and VLAN tags |
| Next-Generation VMDq ¹ (64 queues per port) | <ul style="list-style-type: none"> Enhanced QoS feature by providing weighted round-robin servicing for the Tx data Provides loopback functionality, where data transfer between the virtual machines within the same physical server need not go out to the wire and come back in, improving throughput and CPU usage Supports replication of multicast and broadcast data |
| PC-SIG SR-IOV Implementation (64 virtual functions per port) | <ul style="list-style-type: none"> Provides an implementation of the PCI-SIG standard for I/O Virtualization. The physical configuration of each port is divided into multiple virtual ports. Each virtual port is assigned to an individual virtual machine directly by bypassing the virtual switch in the Hypervisor, resulting in near-native performance. Integrated with Intel® VTI for Directed I/O (VT-d) to provide data protection between virtual machines by assigning separate physical addresses in the memory to each virtual machine |
| Virtual Machine Load Balancing (VLMB) | <ul style="list-style-type: none"> Virtual Machines Load Balancing (VMLB) provides traffic load balancing (Tx and Rx) across Virtual Machines bound to the team interface, as well as fault tolerance in the event of switch, port, cable, or adapter failure. |
| Advanced Packet Filtering | <ul style="list-style-type: none"> 24 exact-matched packets (unicast or multicast) 4096-bit hash filter for unicast and multicast frames Lower processor usage Promiscuous (unicast and multicast) transfer mode support Optional filtering of invalid frames |
| VLAN support with VLAN tag insertion, stripping and packet filtering for up to 4096 VLAN tags | <ul style="list-style-type: none"> Ability to create multiple VLAN segments |

Manageability Features

| | |
|---|--|
| Preboot eXecution Environment (PXE) Support | <ul style="list-style-type: none"> Enables system boot up via the LAN (32-bit and 64-bit) Flash interface for PXE image |
| Simple Network Management Protocol (SNMP) and Remote Network Monitoring (RMON) Statistic Counters | <ul style="list-style-type: none"> Easy system monitoring with industry-standard consoles |
| iSCSI Boot | <ul style="list-style-type: none"> Enables system boot up via iSCSI Provides additional network management capability |
| Watchdog Timer | <ul style="list-style-type: none"> Gives an indication to the manageability firmware or external devices that the chip or the driver is not functioning |

Specifications

General

| | |
|---|--|
| Connectors | One or two LC fiber-optic connectors SFP+ Direct Attach cables (E10G42BTDA) |
| Network Standards Physical Layer Interface | IEEE 802.3: 10GBASE-SR (E10G41BFSR, E10G42BFSR) 10GBASE-LR (E10G41BFLR) SFF-8431: 10GSFP+Cu (a.k.a. Direct Attach) (E10G42BTDA) |

Adapter Product Features

| | |
|-------------------------------------|---|
| Intel® PROSet Utility | For easy configuration and management |
| Plug and play specification support | Standard |
| Receive Side Scaling | Multiple Rx queues enable the efficient distribution of network receive processing across multiple CPUs in multiprocessor systems |
| Direct Cache Access (DCA) | The I/O device activates a pre-fetch engine in the CPU that loads the data into the CPU cache ahead of time, before use, eliminating cache misses and reducing CPU load |

Advanced Software Features

| | |
|--|--|
| Adapter fault tolerance (AFT) | |
| Switch fault tolerance (SFT) | |
| Adaptive load balancing (ALB) | |
| Teaming support | |
| IEEE 802.3ad (link aggregation control protocol) | |
| PCIe Hot Plug*/Active peripheral component interconnect (PCI) | |
| IEEE 802.1Q* VLANs | |
| IEEE 802.3 2005* flow control support | |
| Tx/Rx IP, TCP, & UDP checksum offloading (IPv4, IPv6) capabilities (Transmission control protocol (TCP), user datagram protocol (UDP), Internet protocol (IP)) | |
| IEEE 802.1p* | |
| TCP segmentation/large send offload | |
| MSI-X supports Multiple Independent Queues | |
| Interrupt moderation | |
| IPv6 offloading – Checksum and segmentation capability extended to new standard packet type | |

Technical Features

| | |
|-------------------------------|--|
| Data rate supported per port: | <ul style="list-style-type: none"> Optical: 1 GbE/10 GbE Direct Attach: 10 GbE |
| Bus type | PCI Express 2.0 (5 GT/s) |
| Bus width | 4-lane PCI Express and 8-lane PCI Express |
| Interrupt levels | INTA, MSI, MSI-X |
| Hardware certifications | FCC B, UL, CE, VCCI, BSMI, CTICK, KCC |
| Controller-processor | Intel® 82599 Ethernet Controller |

Power Consumption

| SKU | Maximum Power | Typical Power |
|------------------------------------|---|---------------|
| Dual-port 10GBASE-SR/1000BASE-SX | 6.8 W | 6.5 W |
| Dual-port 10GBASE-LR/1000BASE-LX | 7.0 W | 6.6 W |
| Dual-port direct attached twinax | 6.2 W | 5.8 W |
| Single-port 10GBASE-SR/1000BASE-SX | 4.8 W | 4.5 W |
| Single-port 10GBASE-LR/1000BASE-LX | 4.8 W | 4.5 W |
| Single-port direct attached twinax | 4.6 W | 4.3 W |
| Operating temperature | 0 °C to 55 °C (32 °F to 131 °F) | |
| Air Flow | Minimum of 100 LFM required | |
| Storage temperature | -40 °C to 70 °C (-40 °F to 158 °F) | |
| Storage humidity | Maximum: 90% non-condensing relative humidity at 35 °C | |
| LED Indicators | LINK (solid) and ACTIVITY (blinking) LINK SPEED (green=10 Gbps; yellow=1 Gbps) | |

Physical Dimensions

| | |
|------------------|--|
| Low-profile PCIe | 5.73 in. long, measured without PCIe bracket |
|------------------|--|

Network Operating Systems (NOS) Software Support

| Operating System | IA32 | X64 | IPF |
|----------------------------------|------|-----|-----|
| Windows 7 | ▪ | ▪ | N/A |
| Windows Server 2008 R2 | N/A | ▪ | ▪ |
| Windows Server 2008 R2 Core | N/A | ▪ | ▪ |
| Linux SLES 11 SP1 | ▪ | ▪ | ▪ |
| Windows Vista* SP2 | ▪ | ▪ | N/A |
| Windows Server* 2003 SP2 | ▪ | ▪ | ▪ |
| Windows Server 2008 SP2 | ▪ | ▪ | ▪ |
| Windows Server 2008 SP2 Core | ▪ | ▪ | N/A |
| Linux* Stable Kernel version 2.6 | ▪ | ▪ | ▪ |
| Linux RHEL 4.8 | ▪ | ▪ | N/A |
| Linux RHEL 5.5 | ▪ | ▪ | ▪ |
| Linux SLES 10 SP3 | ▪ | ▪ | ▪ |
| Linux SLES 11 | ▪ | ▪ | ▪ |
| FreeBSD* 8.0 | ▪ | ▪ | ▪ |
| EFI* 1.1 | N/A | N/A | ▪ |
| UEFI* 2.1 | N/A | ▪ | ▪ |

Intel® Backing Information

Backed by an Intel limited lifetime warranty, 90-day money-back guarantee (U.S. and Canada), and worldwide support.

Intel® Ethernet Converged Network Adapter X520 Product Codes

| Configuration | Product Code |
|-----------------------|--------------|
| X520-SR1 [†] | E10G41BFSR |
| X520-SR2 [†] | E10G42BFSR |
| X520-LR1 [†] | E10G41BFLR |
| X520-DA2 | E10G42BTDA |

[†] Ships with pluggable optic installed.

Intel® Ethernet SFP+ Twinaxial Cable Product Codes

| Cable Length (m) | Product Code |
|------------------|--------------|
| 1 | XDACBL1M |
| 3 | XDACBL3M |
| 5 | XDACBL5M |

Intel® Ethernet SFP+ Optic Product Codes

| Configuration | Product Code |
|---------------|--------------|
| SR Optic | E10GSFPSR |
| LR Optic | E10GSFPLR |

For Product Information

To speak to a customer service representative, please call 1-800-538-3373 (U.S. and Canada) or visit support.intel.com/support/go/network/contact.htm for the telephone number in your area. For additional product information on Intel Networking Connectivity products, visit www.intel.com/go/ethernet.

Customer Support

Intel® Customer Support Services offers a broad selection of programs including phone support and warranty service. For more information, contact us at support.intel.com/support/go/network/adapter/home.htm.

(Service and availability may vary by country.)

For more information, visit www.intel.com/go/ethernet

¹ Requires a system that supports VMDq.

INFORMATION IN THIS DOCUMENT IS PROVIDED IN CONNECTION WITH INTEL PRODUCTS. NO LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT. EXCEPT AS PROVIDED IN INTEL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, INTEL ASSUMES NO LIABILITY WHATSOEVER AND INTEL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY, RELATING TO SALE AND/OR USE OF INTEL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

A "Mission Critical Application" is any application in which failure of the Intel Product could result, directly or indirectly, in personal injury or death. SHOULD YOU PURCHASE OR USE INTEL'S PRODUCTS FOR ANY SUCH MISSION CRITICAL APPLICATION, YOU SHALL INDEMNIFY AND HOLD INTEL AND ITS SUBSIDIARIES, SUBCONTRACTORS AND AFFILIATES, AND THE DIRECTORS, OFFICERS, AND EMPLOYEES OF EACH, HARMLESS AGAINST ALL CLAIMS COSTS, DAMAGES, AND EXPENSES AND REASONABLE ATTORNEYS' FEES ARISING OUT OF, DIRECTLY OR INDIRECTLY, ANY CLAIM OF PRODUCT LIABILITY, PERSONAL INJURY, OR DEATH ARISING IN ANY WAY OUT OF SUCH MISSION CRITICAL APPLICATION, WHETHER OR NOT INTEL OR ITS SUBCONTRACTOR WAS NEGLIGENT IN THE DESIGN, MANUFACTURE, OR WARNING OF THE INTEL PRODUCT OR ANY OF ITS PARTS.

Intel may make changes to specifications and product descriptions at any time, without notice. Designers must not rely on the absence or characteristics of any features or instructions marked "reserved" or "undefined". Intel reserves these for future definition and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to them. The information here is subject to change without notice. Do not finalize a design with this information.

The products described in this document may contain design defects or errors known as errata which may cause the product to deviate from published specifications. Current characterized errata are available on request.

Contact your local Intel sales office or your distributor to obtain the latest specifications and before placing your product order.

Copies of documents which have an order number and are referenced in this document, or other Intel literature, may be obtained by calling 1-800-548-4725, or go to: <http://www.intel.com/design/literature.htm>

Intel, the Intel logo, and Xeon are trademarks of Intel Corporation in the U.S. and other countries.

*Other names and brands may be claimed as the property of others

Copyright © 2011, 2012 Intel Corporation. All rights reserved.

Printed in USA

LH/TAR/SWU

 Please Recycle

322217-006US

