

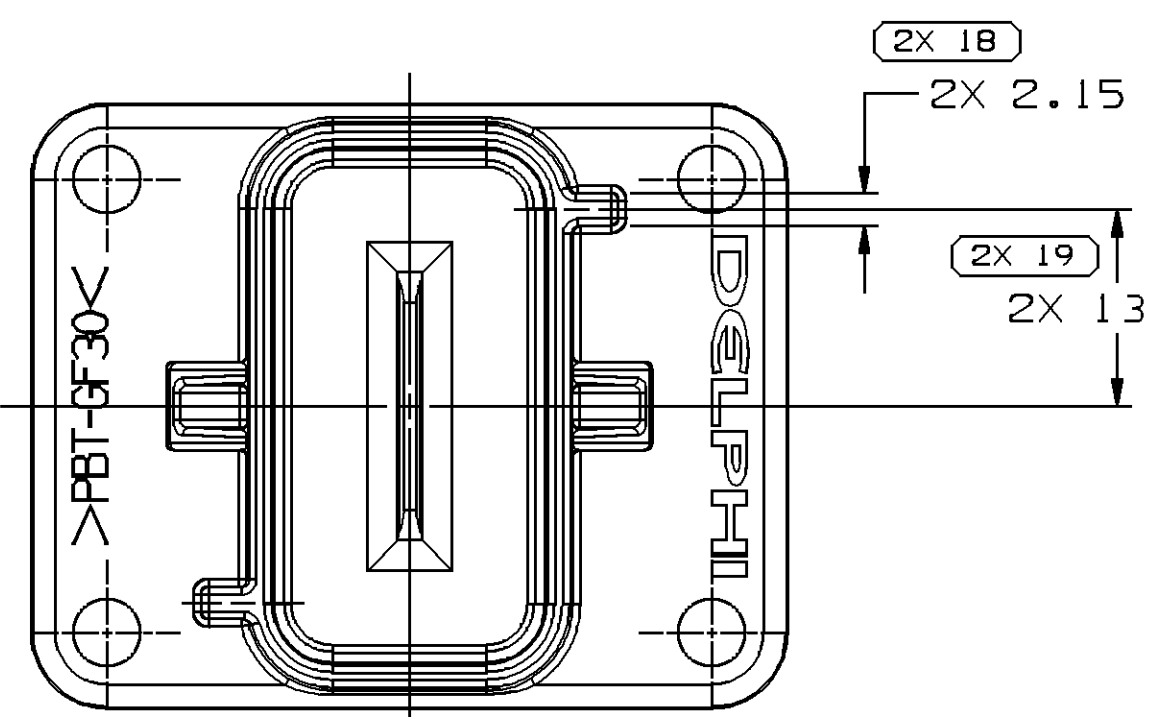
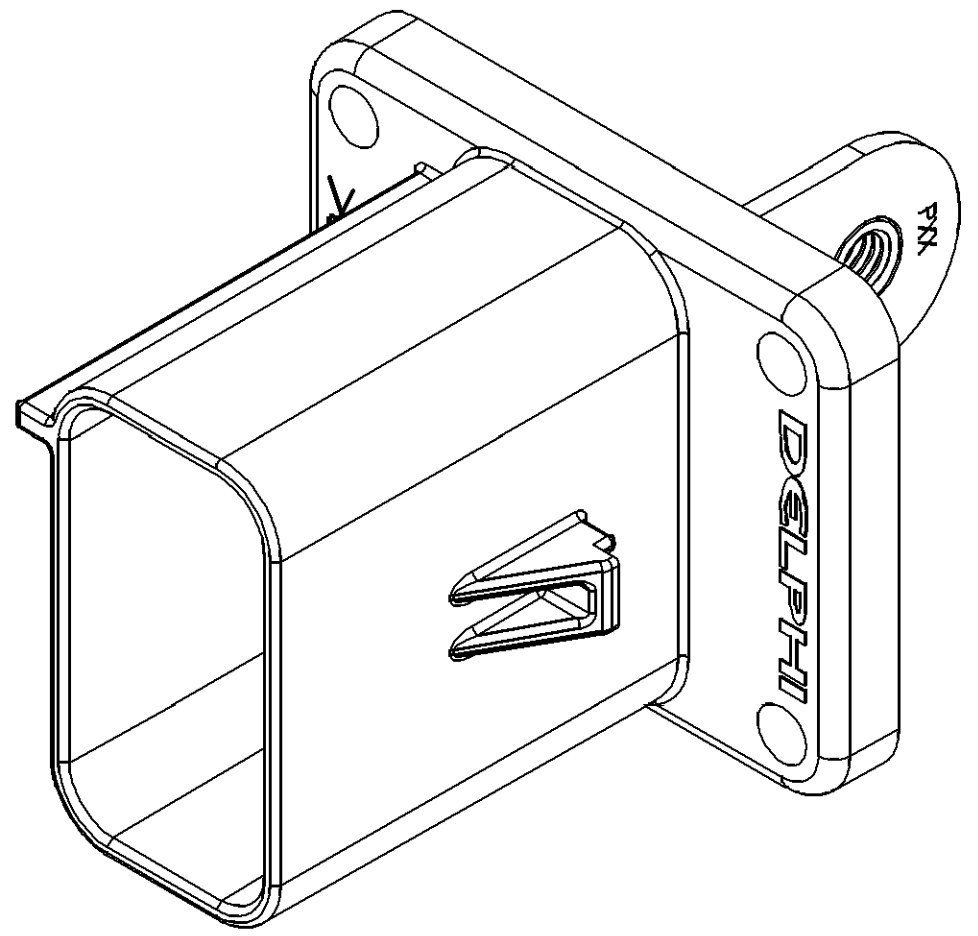
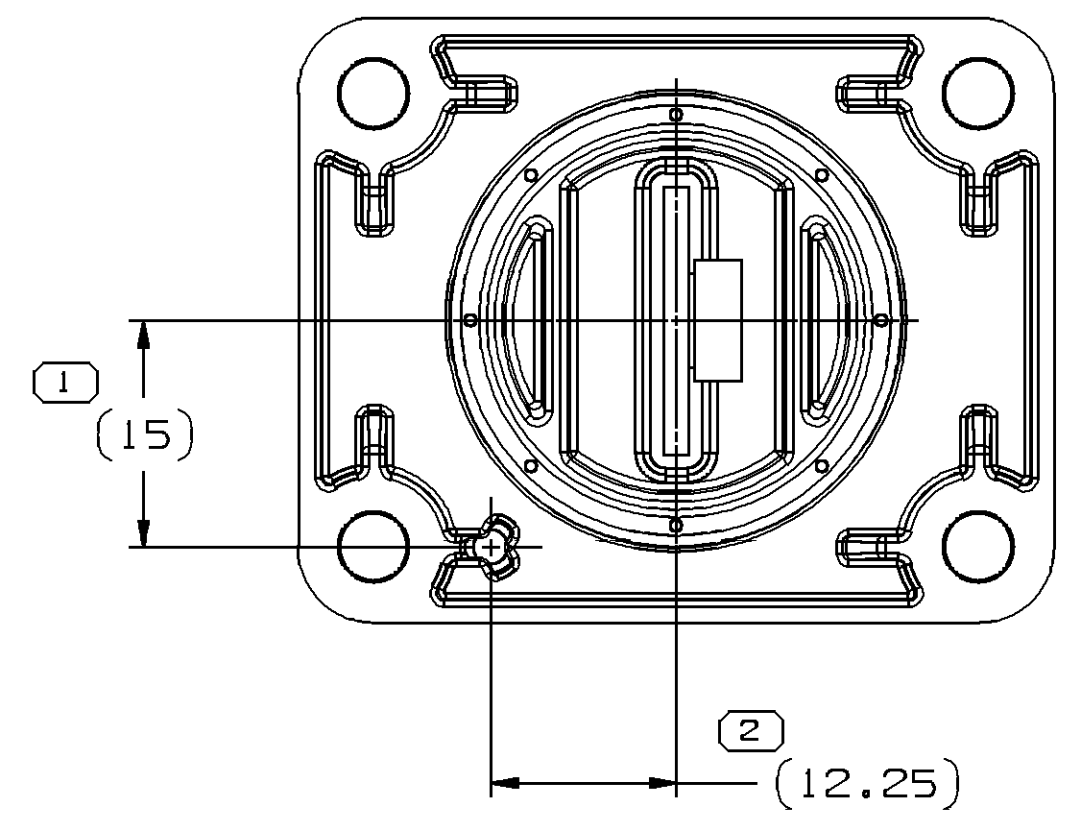
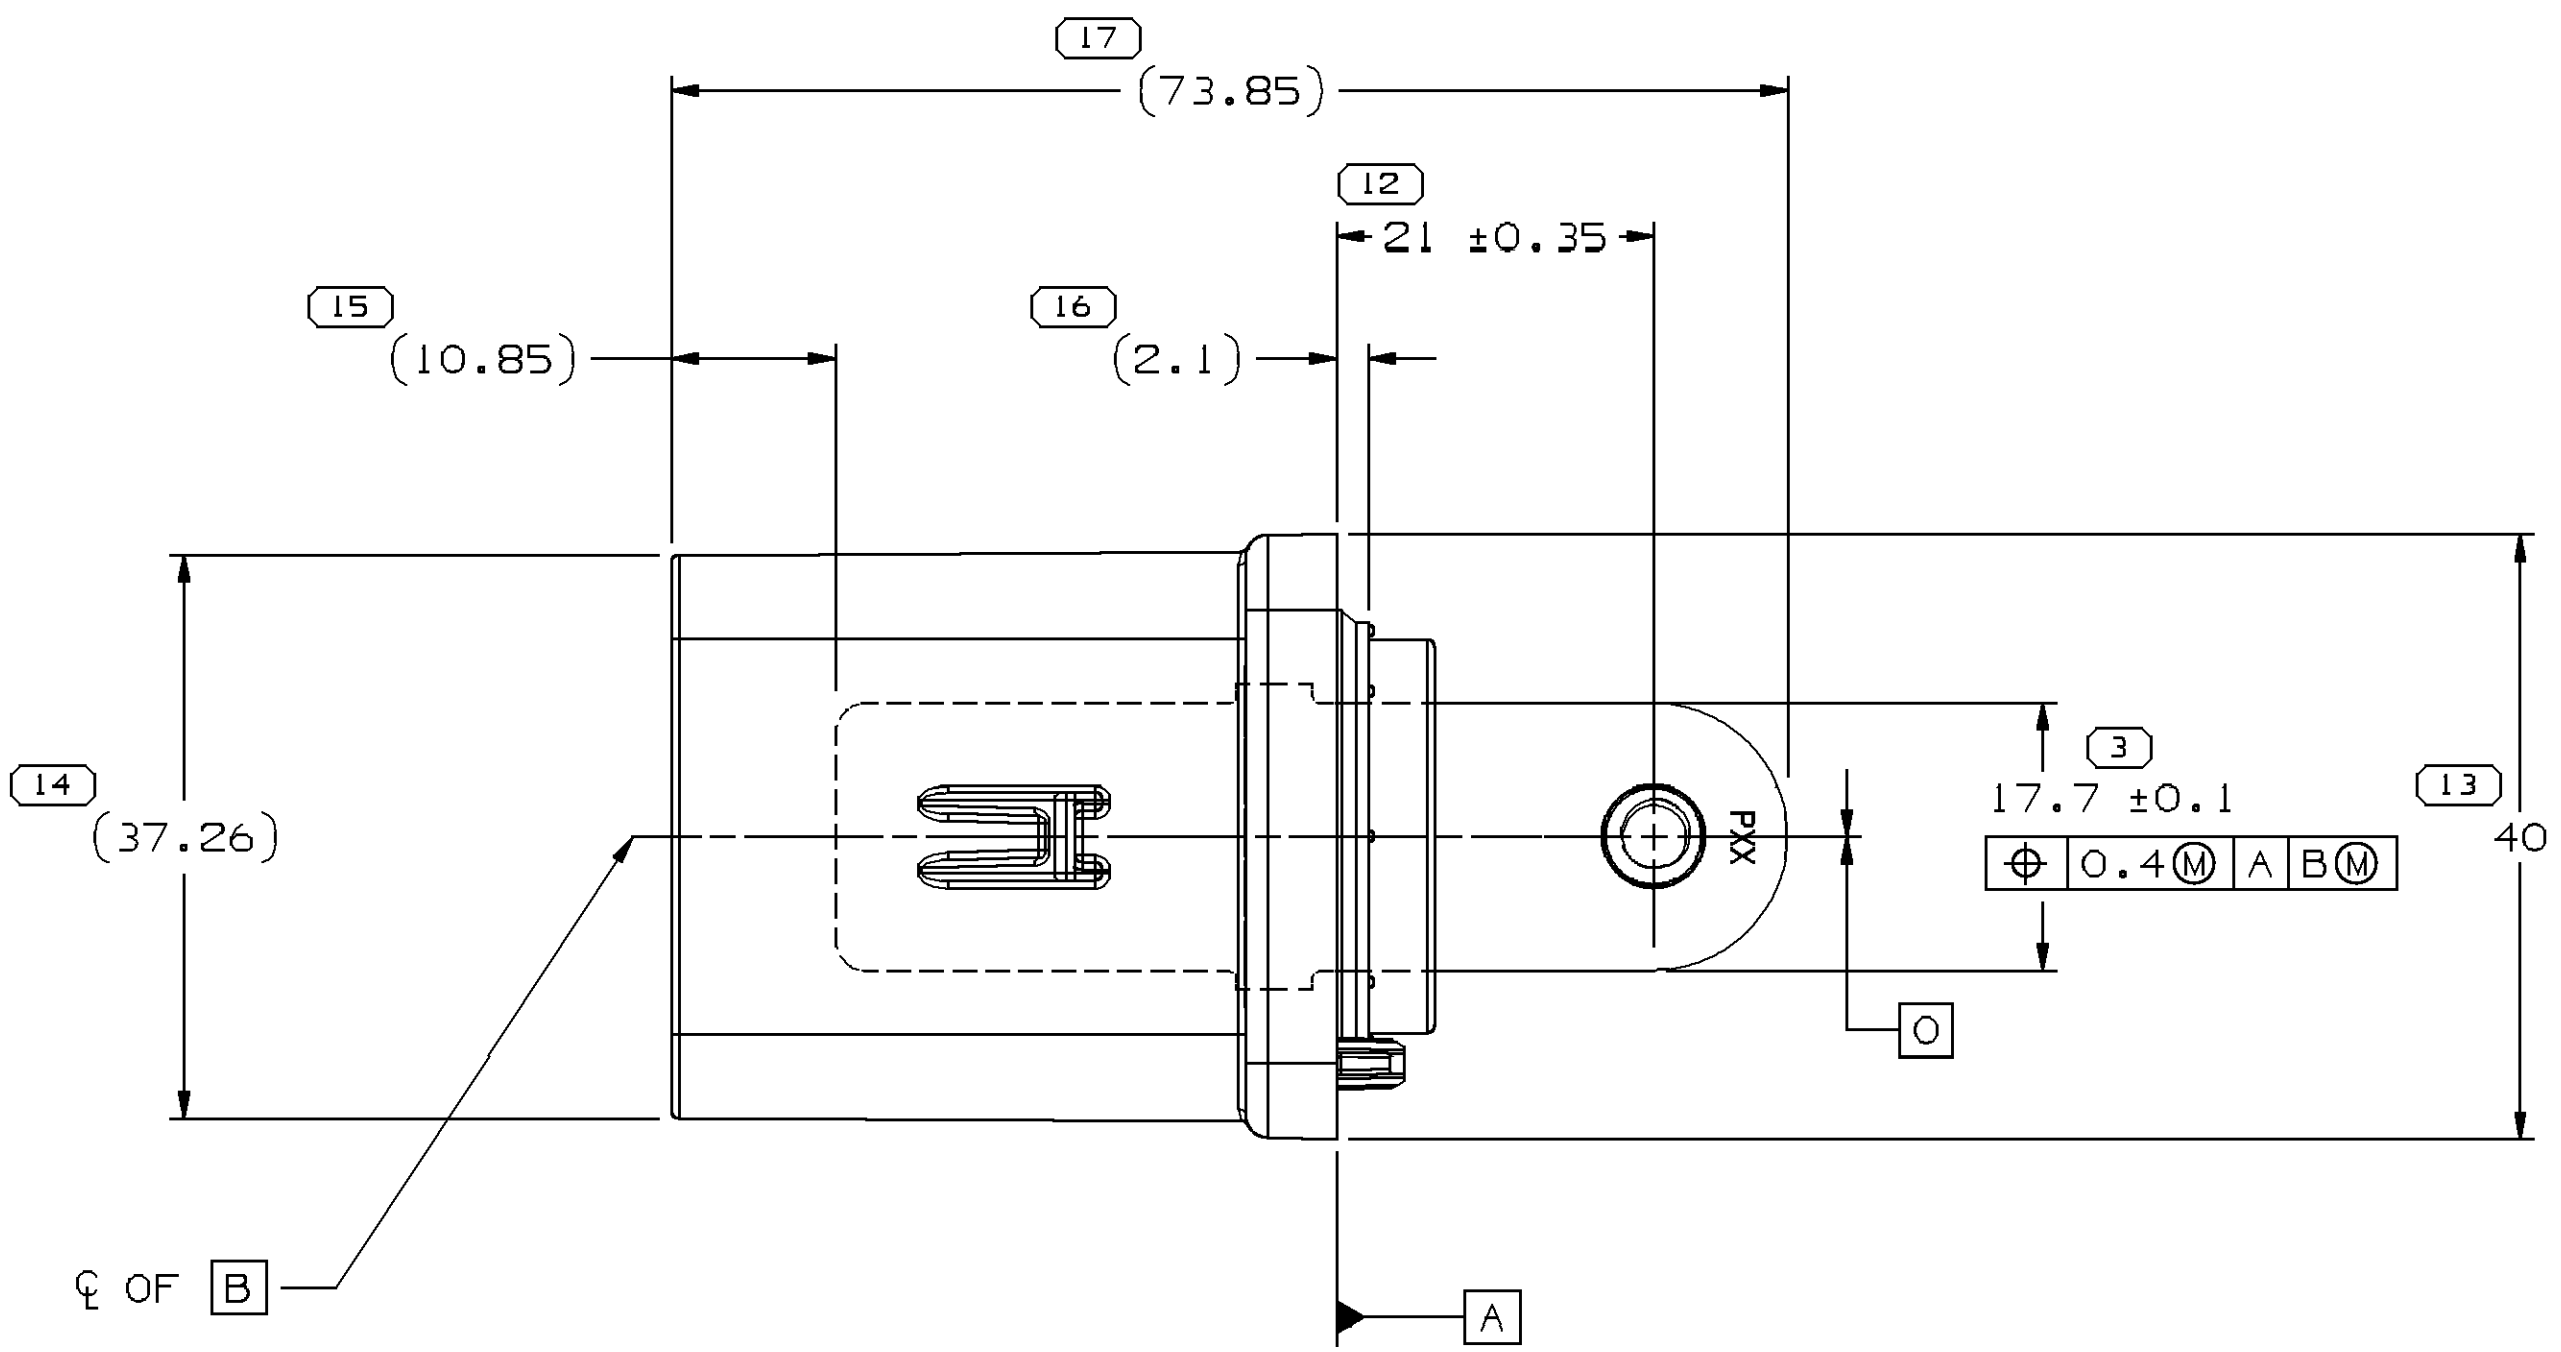
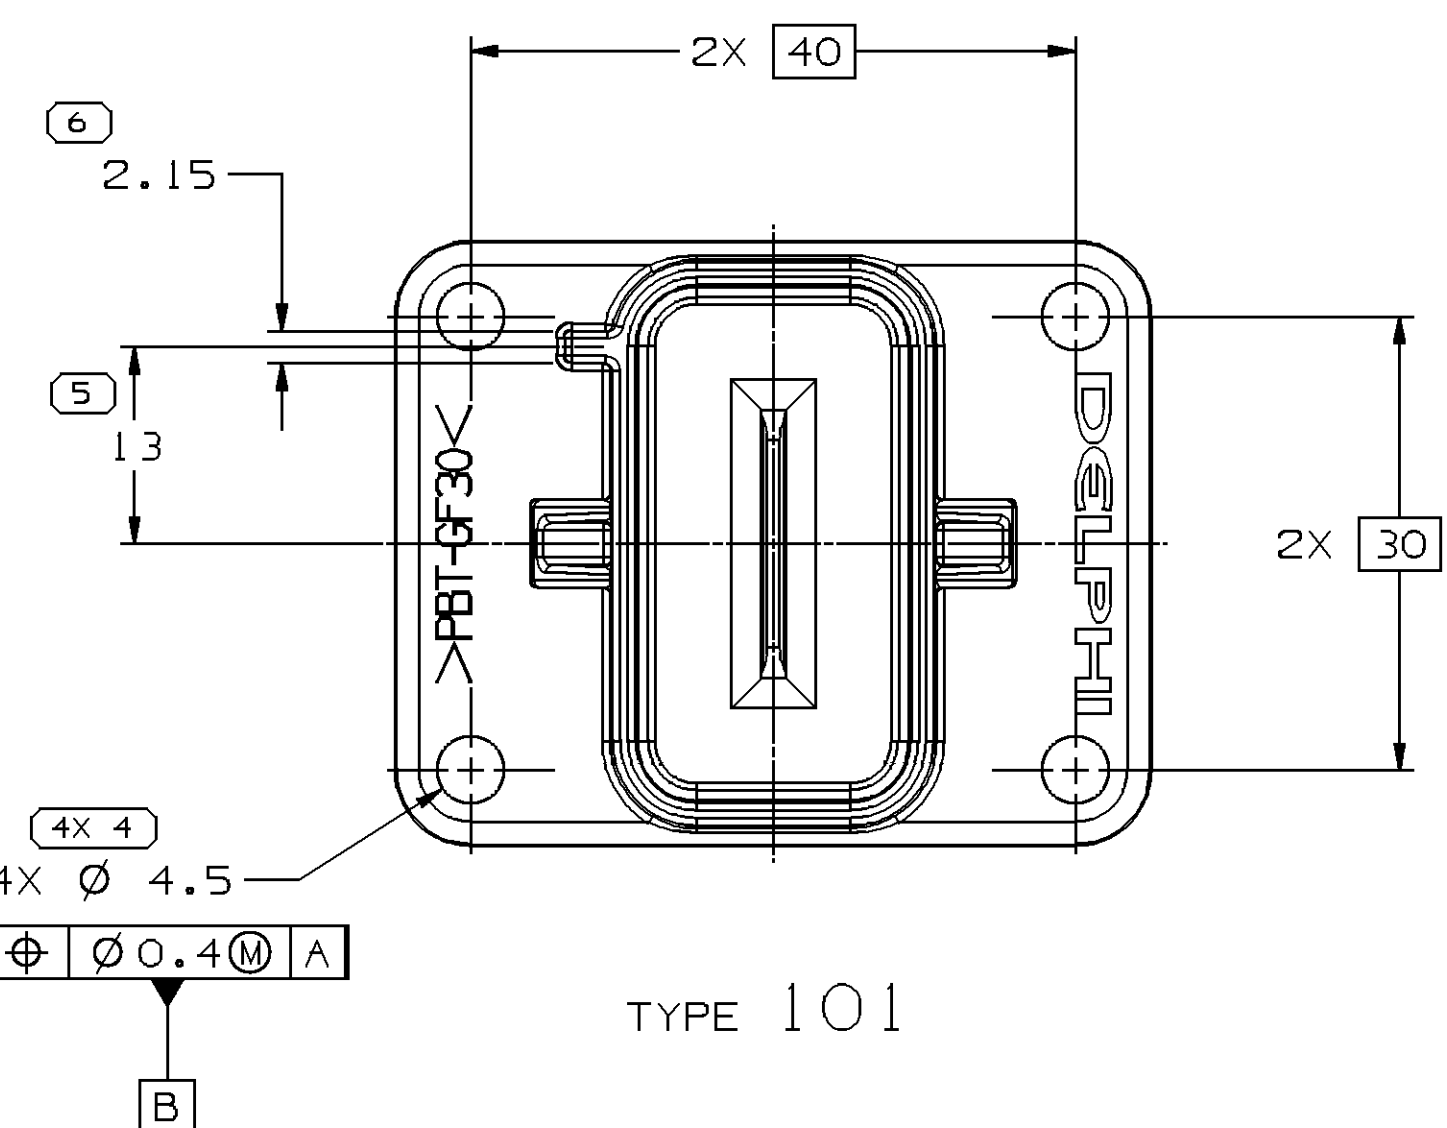



MOUNTING INFORMATION

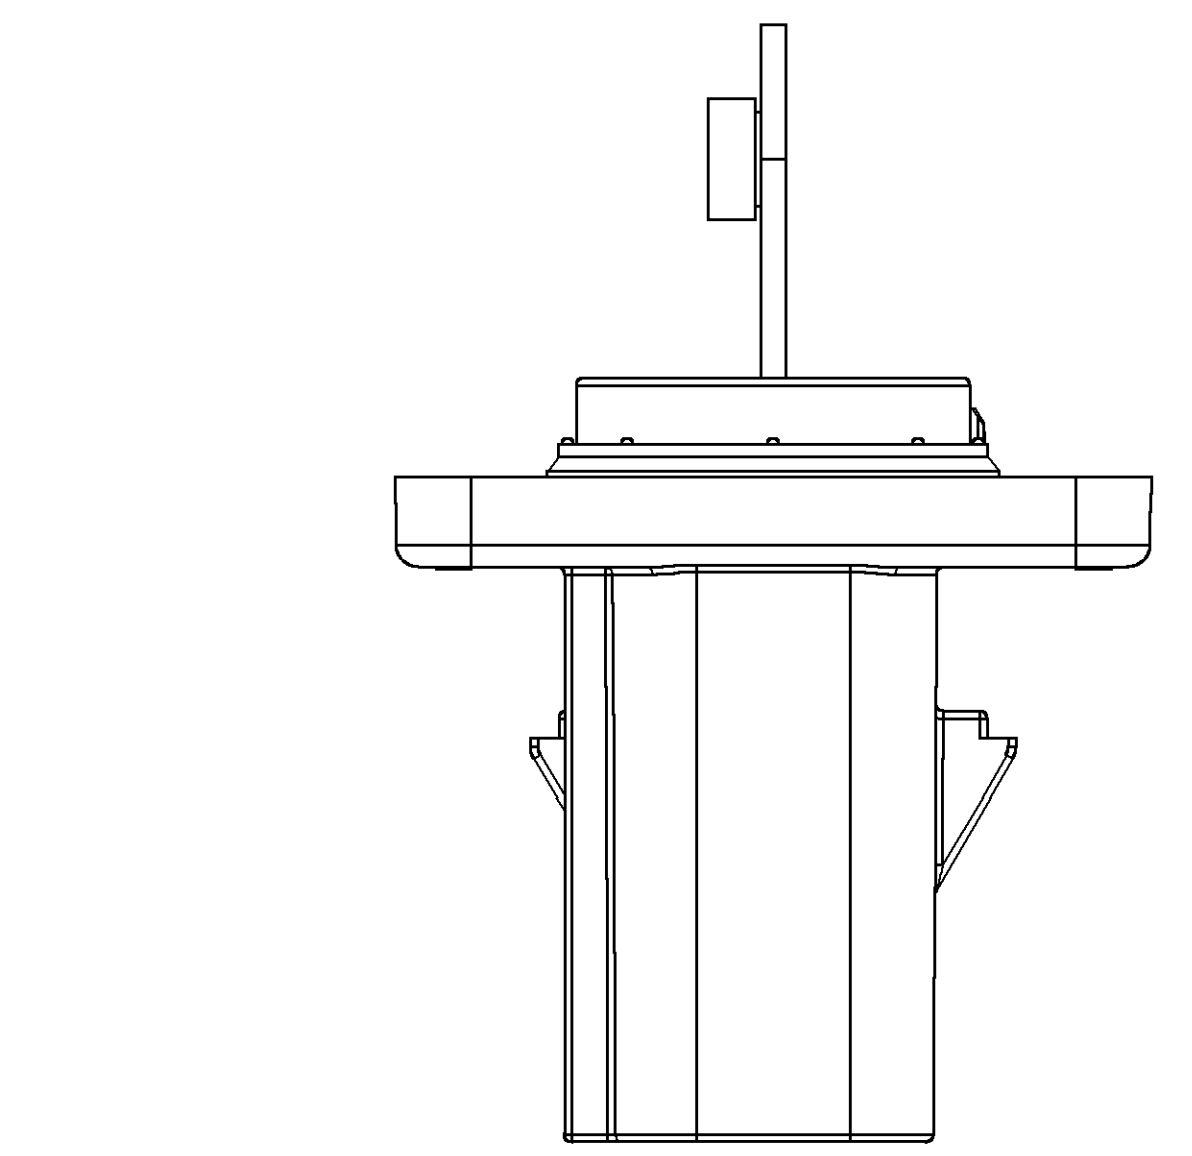

TYPE 102
SAME AS TYPE 101
EXCEPT AS SHOWN

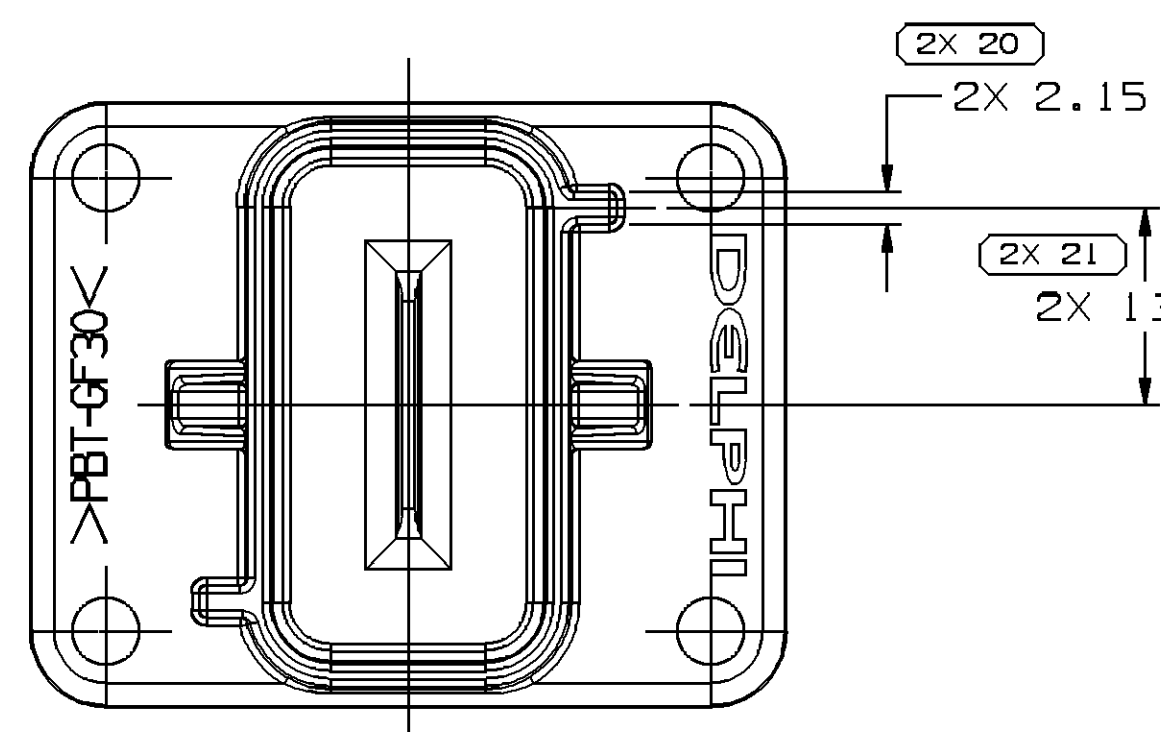

TYPE 103
SAME AS TYPE 101
EXCEPT AS SHOWN

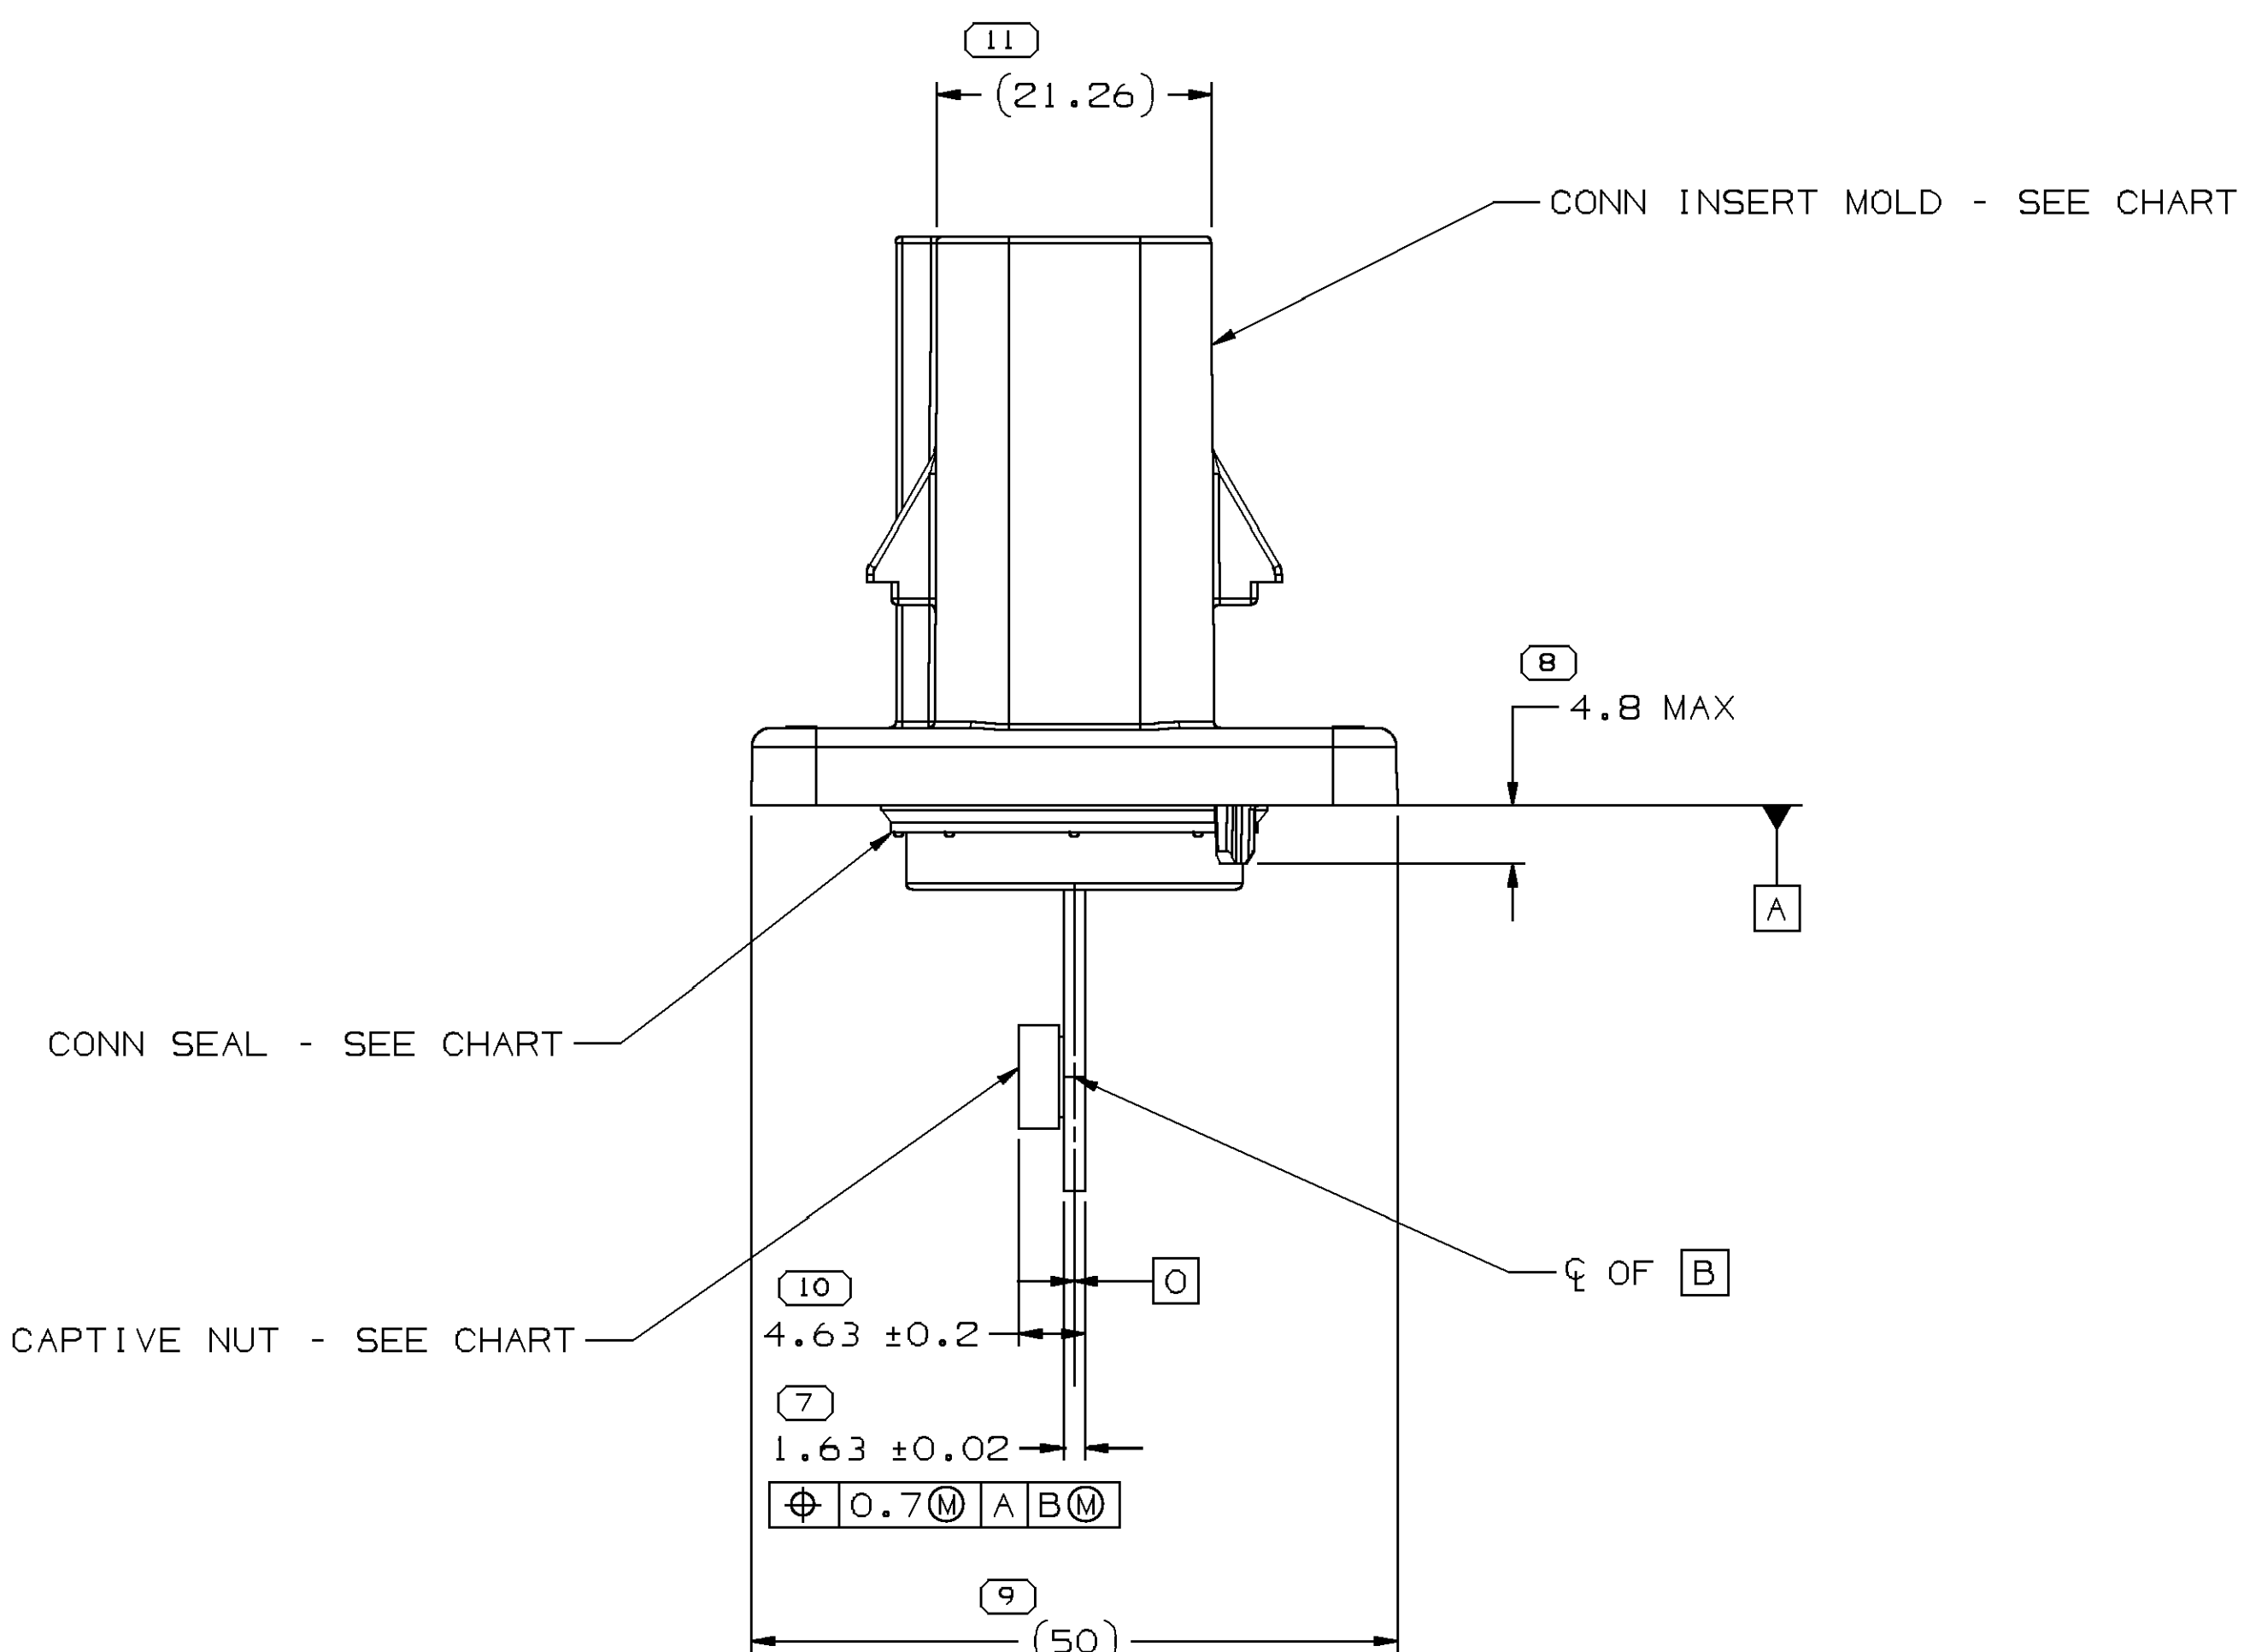

33180997	01	AB	103		33180996	13525088	13533877	15549763
13913007	01	AB	102		13912837	13525088	13533877	13817280
13520386	01	AE	101		13583933	13525088	13533877	13520916
PART NO	REV	N/P	TYPE		CONN INSERT MOLD	CONN SEAL	CAPTIVE NUT	MATING CONN ASSEMBLY

SYMBOL DEFINITION		MISSING SYMBOLS	
 A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL (A OR B) DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.	TOTAL NO OF INSPECTIONS REQUIRED	28	NO MISSING SYMBOL NUMBER
 INDICATES THE DIMENSION IS SHOWN ON THE PART DRAWING AND THE TOOL MUST BE QUALIFIED AT 80% OF THE TOLERANCE SHOWN UNLESS SUPERSEDED BY A "TBT".	LAST NO. USED	21	

DWO STATUS					ZONE	REVISION HISTORY	AUTH	OR APPR/APPD 1 2
DATE	TIME	REV	N/P	CHK				
19A1U1	R 01	-	-	-	13520386 - WAS SEPARATE DWO: 13913007 -	415146	EEA	JAA
29A1U1	R 02	-	-	-	ALL PARTS - UPDATED "CAPTIVE NUT" COLUMN	426424	JWR	JAG
17JL14	R 03	-	-	-	33180997 - RELEASED	427050	JWR	JAG
30A1P5	R 04	-	-	-	33180997 - UPDATED PART AVAILABILITY	429517	JWR	JAG
15AU17	R 05	-	-	-	ALL PARTS - ADDED ASSEMBLY MANUAL NOTE AND REVISED APPEARANCE ITEM NOTE	437257	EVV	DAB

- NOTES
1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:
DIMENSIONS ARE TO FACE OF VIEW SHOWN AND
MATHOMATICALLY ROUNDED BY COMPUTERS FOR INSPECTION
(SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL
OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL
BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
 2. THIS PRODUCT IS NOT CATEGORIZED AS AN APPEARANCE ITEM, MINOR
IMPERFECTIONS INCLUDING, BUT NOT LIMITED TO, FLOW MARKS, COLOR
BLEMISHES, GATE VESTIGE, AND SOFT FLASH THAT DO NOT AFFECT THE
FIT, FORM, OR FUNCTION OF THE PART ARE PERMISSIBLE PER ENG 4-3.CS.01-EN.
 3. WHEN PARTS ARE SHIPPED THEY MUST BE PACKED IN PLASTIC BAGS
OR SHIPPING CONTAINERS MUST BE LINED WITH PLASTIC LINERS.
BAGS OR LINERS MUST BE SEALED TO AVOID FOREIGN MATTER.
 4. SEALING CODE 3 - DESIGN WILL PASS SALT FOG AND IMMERSION
TEST AFTER CONDITIONING AS SPECIFIED IN
ESA-644 (WEATHER-PACK), ESA-710 (METRI-PACK),
ESA-650 (UNDERHOOD MICRO-PACK), C-4006
(WORLD CONNECTOR) ETC WHEN MATED TO
MATING PART OR EQUIVALENT
 5. THIS PART ACCEPTS THE FOLLOWING COMPONENTS OR EQUIVALENT:
RING TERMINAL 1532619;
 6. CAPTIVE NUT:
PEM M5 X 0.8 PLATED PRESS-IN NUT, PEM PN KF52-M5
OR EQUIVALENT - FOR 1mm MIN THICK STOCK.
 7. REFERENCE MATING COMPONENTS OR EQUIVALENT:
TERMINAL ASSEMBLY 13523154 OR EQUIVALENT
 8. FOR ASSEMBLY MANUAL REFER TO P/N 33133711.

[illegible]