
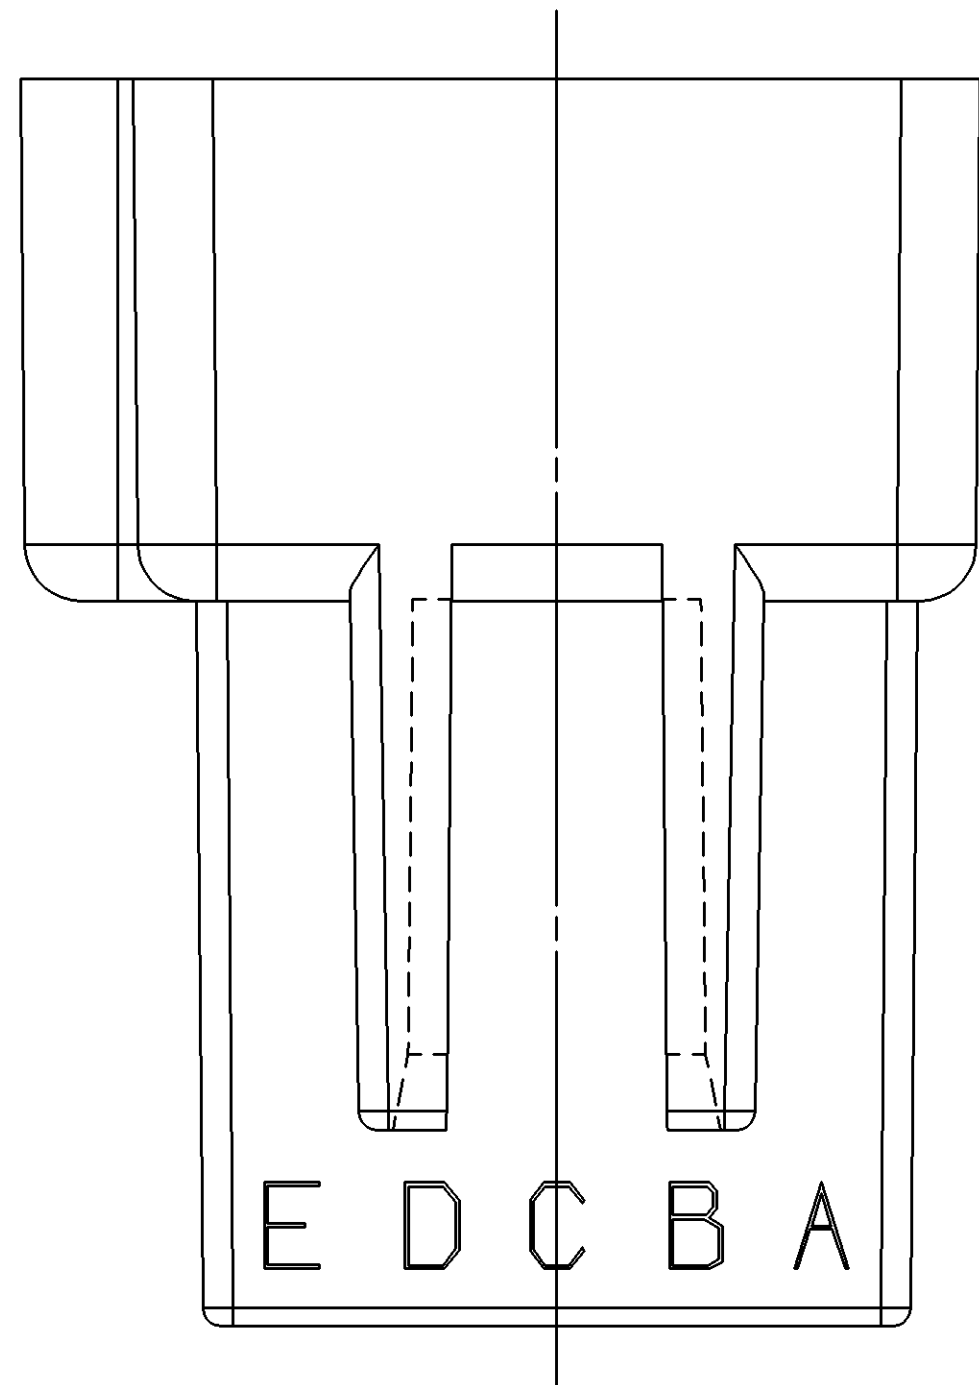
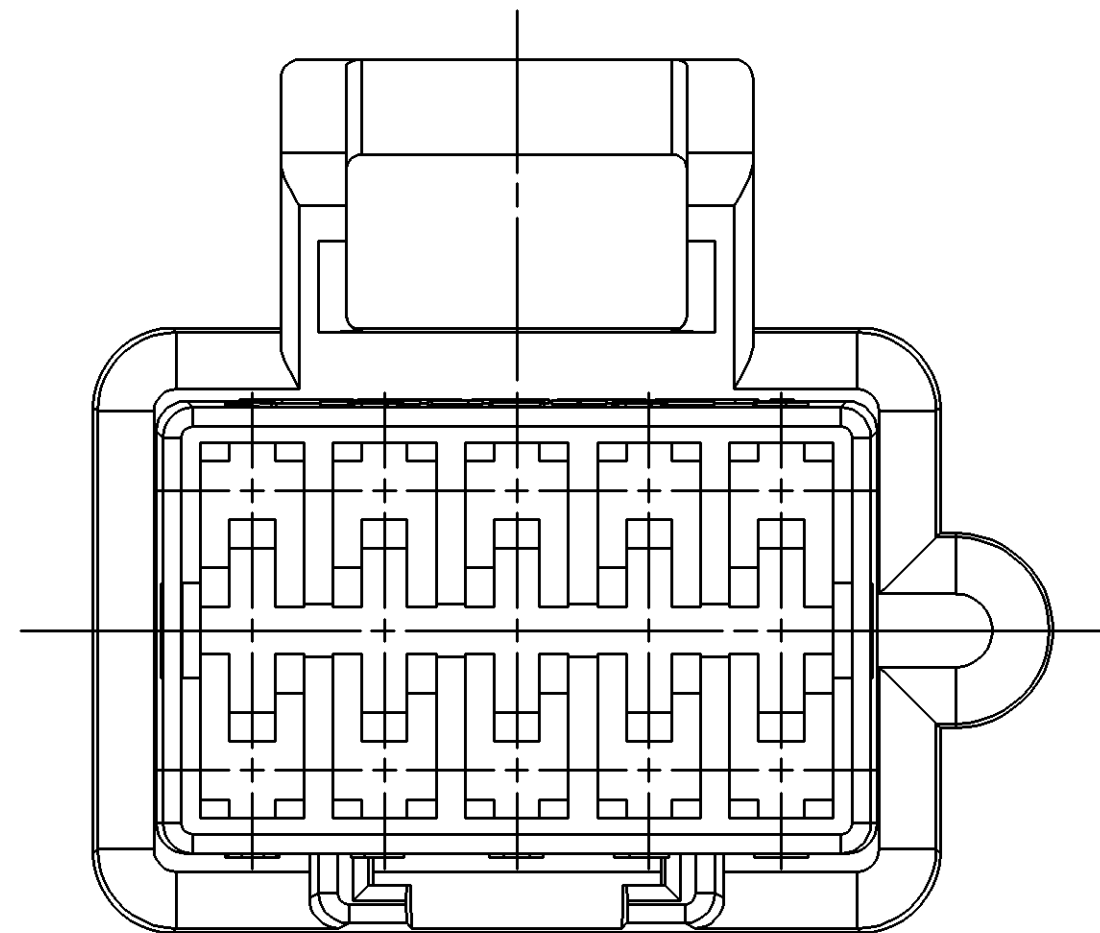
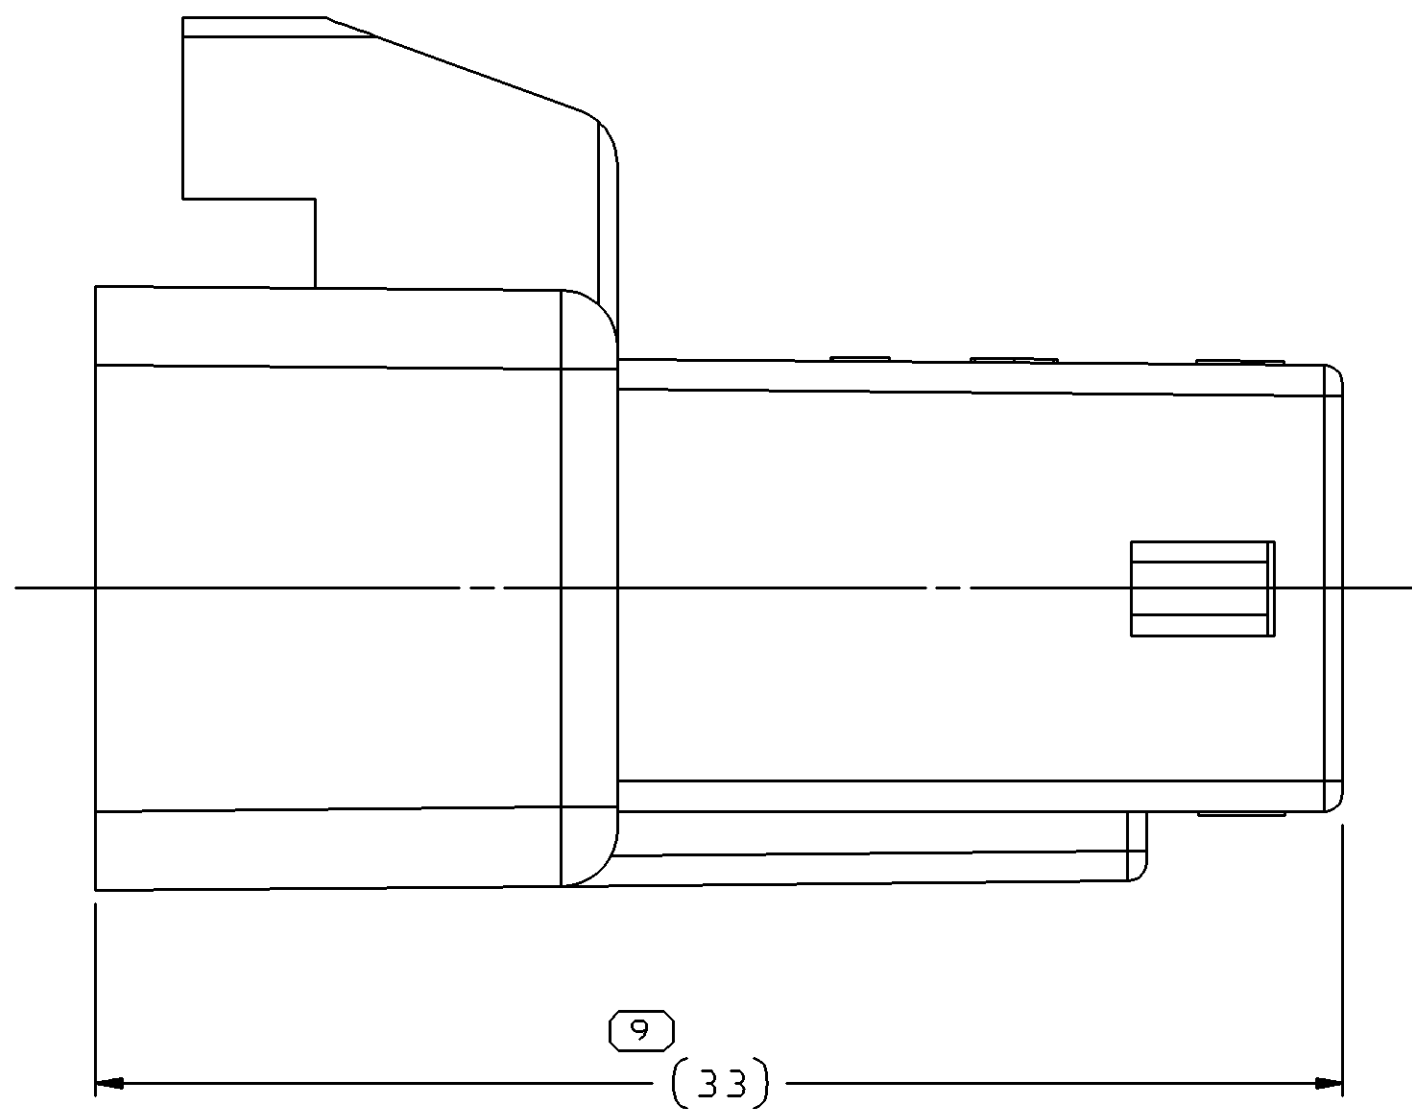
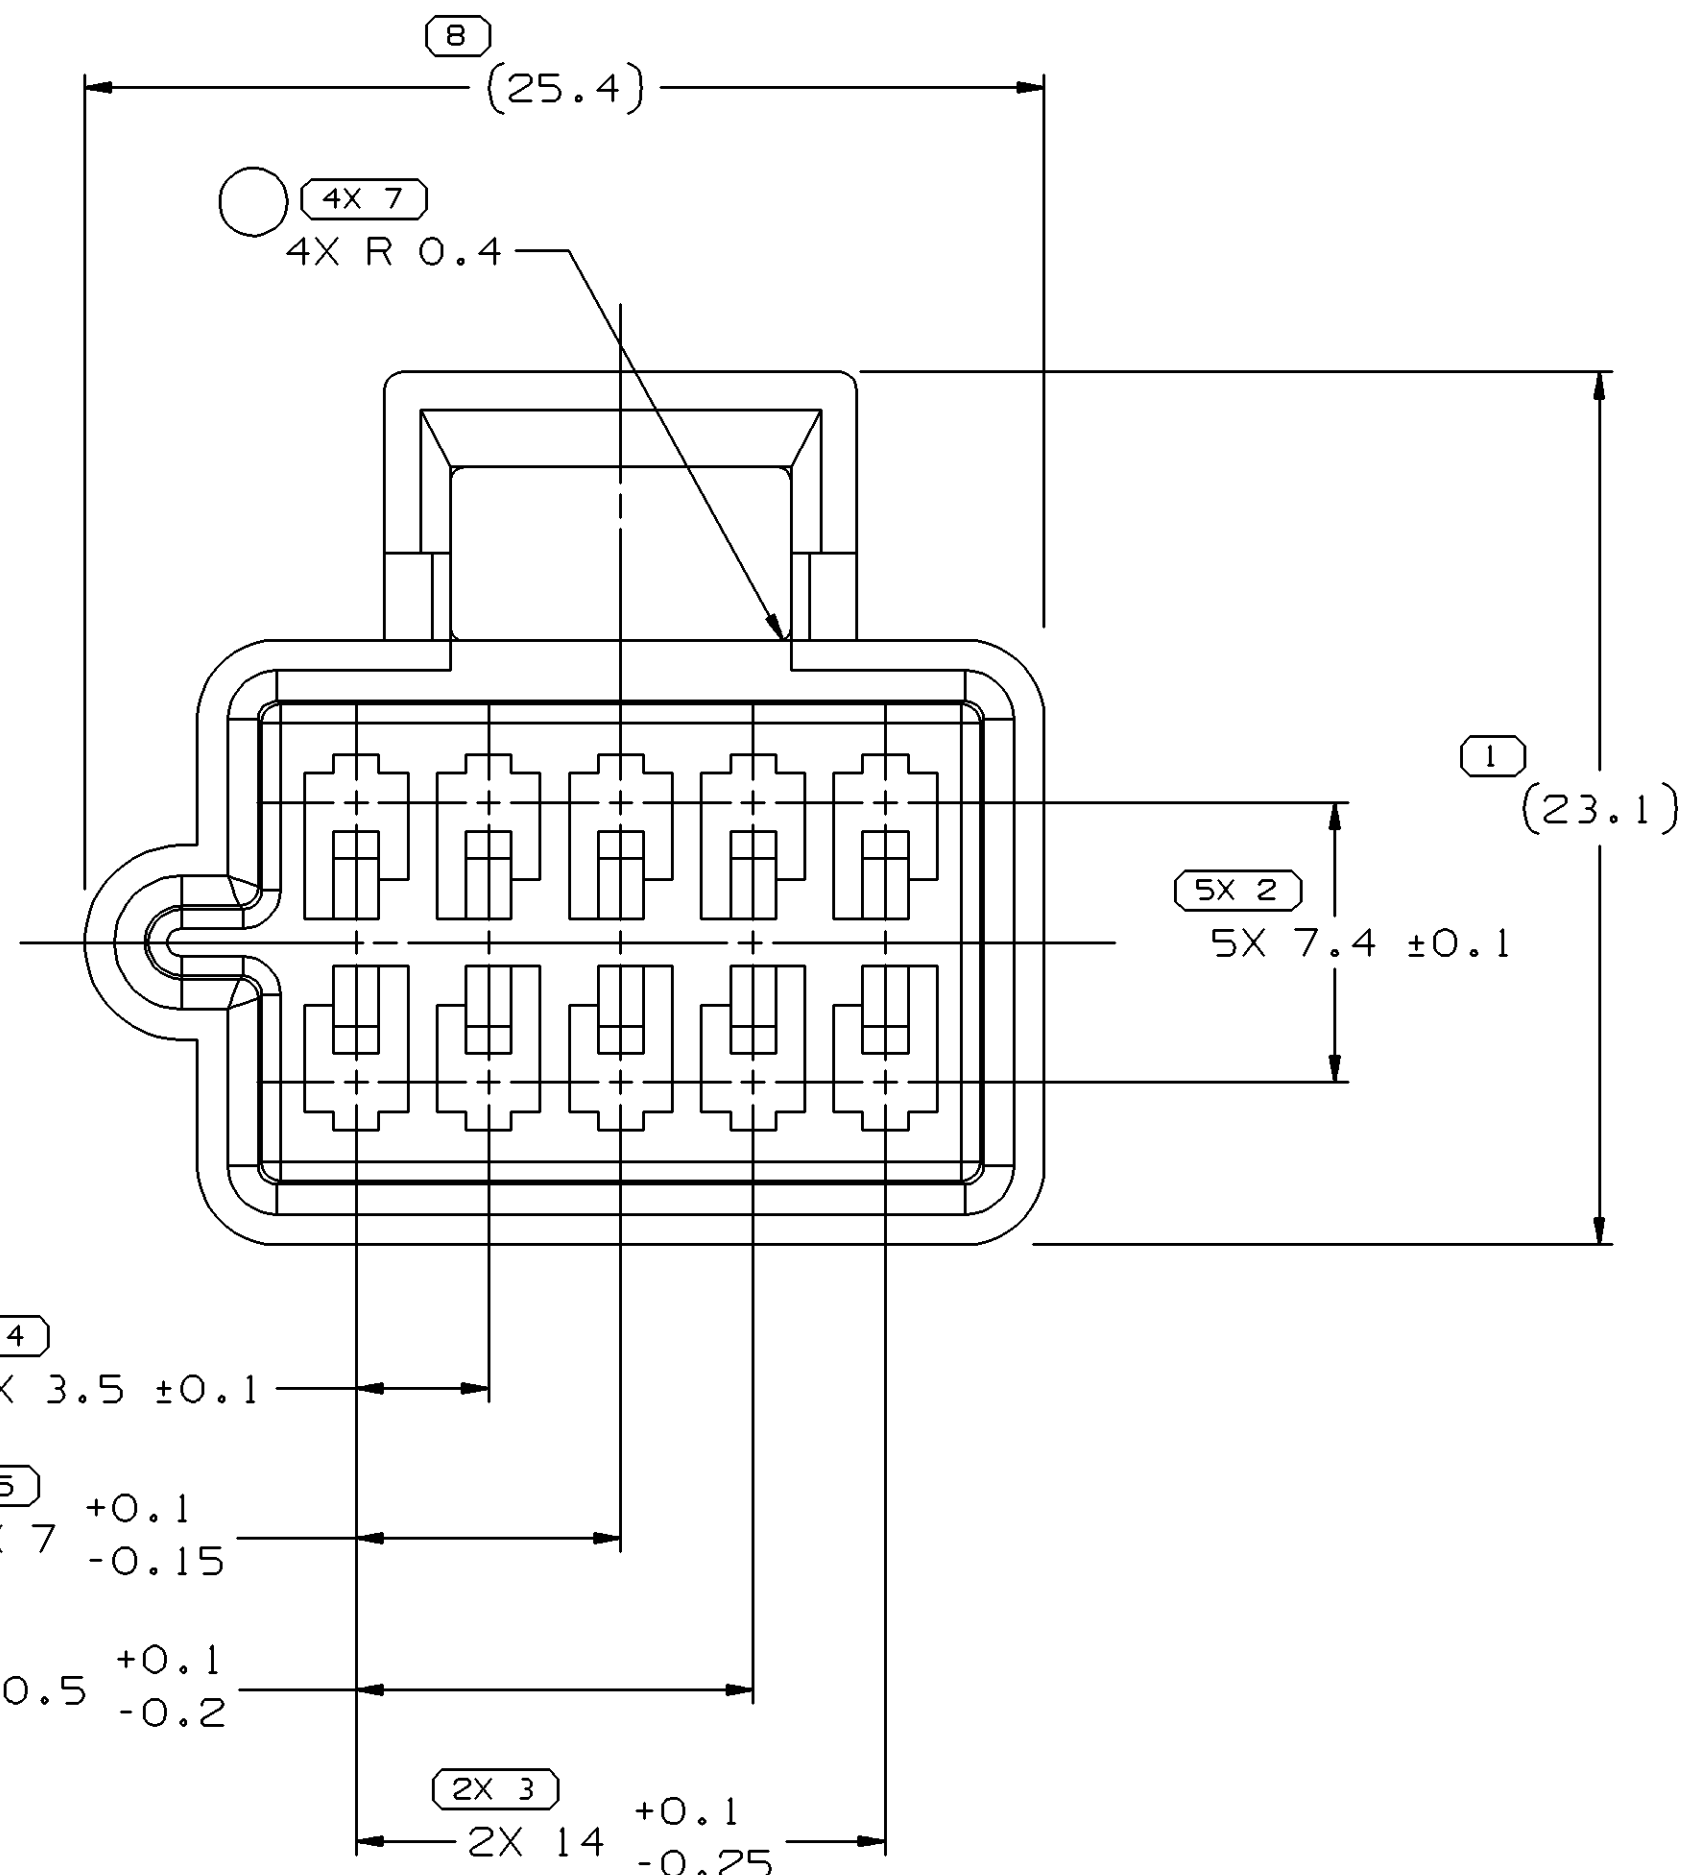



SYMBOL DEFINITION		MISSING SYMBOLS	
A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL () DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.	TOTAL NO OF INSPECTIONS REQUIRED	NO MISSING SYMBOL NUMBER	
	LAST NO. USED		
	20		
	9		

DATE		STG		REV		N/P		CHG		ZONE		REVISION HISTORY		AUTH		DR		APVD		APVD	
250C00		R		A5		-		-		-		REDRAWN TO PD & REVISED TOLERANCES		203279		JGR		EODV		EODV	
07JA05		R		02		-		-		-		REVISED RADIUS ON INSIDE OF LOCK FEATURE		252625		ESH		JAA		B06	

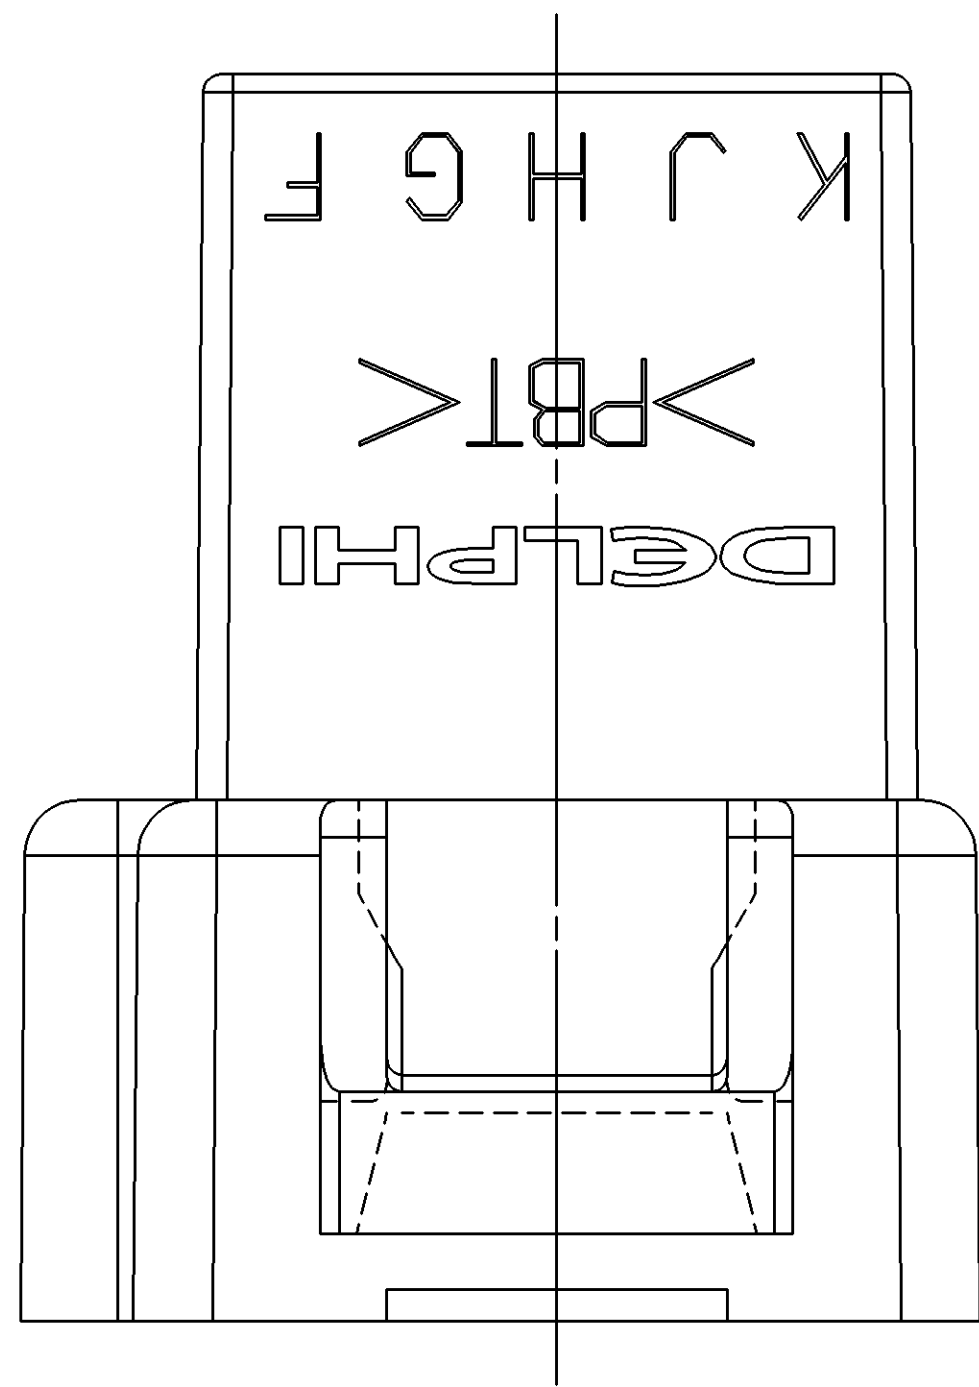

NOTES

- UNLESS OTHERWISE SPECIFIED AND/OR INDICATED: DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
- MATERIAL RECYCLING CODE PER ISO 11469, (2,3)X(0,1) CHARACTERS AS SHOWN TO BE LOCATED ON ANY EXTERIOR SURFACE.
- THIS PART IS NOT CONTROLLED FOR AUTOMATIC FEEDING.
- REFERENCE MATING COMPONENTS OR EQUIVALENT: CONNECTOR 12064871
- THIS PART ACCEPTS THE FOLLOWING COMPONENTS OR EQUIVALENT: TERMINAL 12040993 MAX INSULATION CRIMP MUST BE LESS THAN 3 HIGH AND 2.6 WIDE. SECONDARY TERMINAL LOCK 12064772
- THIS CONNECTOR WILL PASS THROUGH A Ø 31 MIN HOLE.
- FOR POLYESTER IN-PROCESS MOISTURE AND PART DEGRADATION LIMITS SEE E50-1502.
- (1,5)X(0,1) DELPHI CORPORATE BRAND TO BE LOCATED ON ANY EXTERIOR SURFACE, PREFERABLY VISIBLE AT FINAL ASSEMBLY. OPTIONAL CONSTRUCTION TO BE "PED".

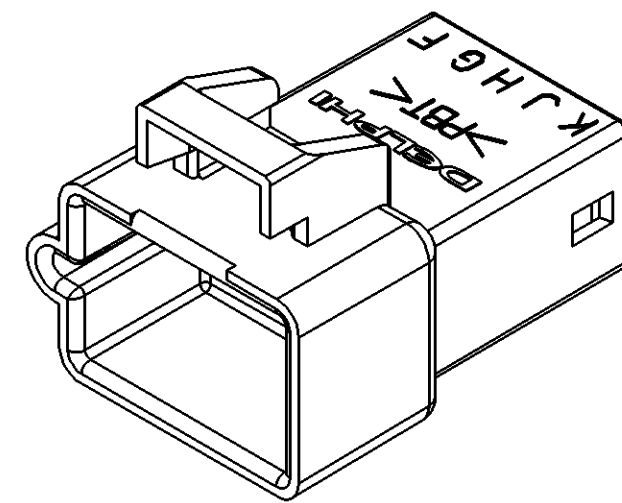

VIEW SCALE DOES NOT REFLECT ACTUAL PART SIZE

DIMENSIONAL RANGE (MM)		CHART		THIRD ANGLE PROJECTION		DO NOT SCALE	
FROM	TO	1	2	3	4	5	6
0	20	1	2	3	4	5	6
20	30	1	2	3	4	5	6
30	70	1	2	3	4	5	6
70	100	1	2	3	4	5	6
100	150	1	2	3	4	5	6
150	200	1	2	3	4	5	6
200	250	1	2	3	4	5	6
250	300	1	2	3	4	5	6
300	400	1	2	3	4	5	6
TOLERANCE UNLESS OTHERWISE SPECIFIED		±0.15	±0.2	±0.3	±0.4	±0.5	±0.6
ANGULAR TOLERANCE		±1	±1.2	±1.5	±2	±2.5	±3

DRAWING TYPE		PART DRAWING	
STYLE		D	
VOLUME (CM³)		4.150	
DISTR CODE		D	
UNLESS OTHERWISE SPECIFIED		THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5M-1994 AS AMENDED BY THE 04 BLANK. DIMENSIONING AND TOLERANCING ADDENDUM-2001. SEPARATE PATTERNING OF FEATURES MAY BE GIVEN SEPARATELY REGARDLESS OF DATUM REFERENCES.	
ALL DIMENSIONS ARE IN MILLIMETERS		REFERENCE	
PROCESS SENSITIVE DIMENSION		THIRD ANGLE PROJECTION	
DIMENSIONS ENCLOSED IN () INDICATE RETRACTION DIMENSIONS AND NO TOLERANCE LIMITS ARE ESTABLISHED		DO NOT SCALE	
		USE MATH DATA	

DELPHI	
DELPHI PACKARD ELECTRIC SYSTEMS WARREN, OH	
DRAWING NAME	
CONN 10 M M/P 150 BLU	
DRAWING NUMBER	
12064872	
SIZE	
A0	
SCALE	
5:1	
FRAME NO	
1 OF 1	
SHEET NO	
1 OF 1	
STG	
R	
REV	
02	