


NON-INSULATED FLANGE SPADE TERMINALS

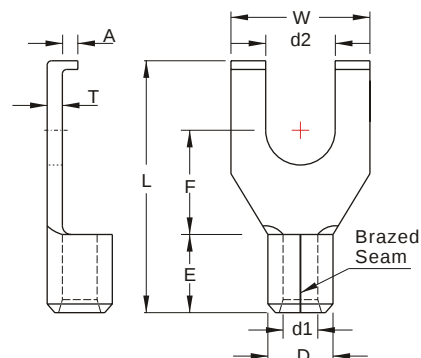

MAXIMUM ELECTRIC CURRENT:

A.W.G.	22	20	18	16	14	12	10
AMP.	9	12	17	18	30	35	50

TERMINAL MATERIAL: COPPER

WIRE RANGE A.W.G. mm ²	ITEM NO.		STUD SIZE		DIMENSION ^{inch} mm							CRIMPING TOOL	Q'TY BOX												
	BRAZED SEAM	BUTTED SEAM	d2		W	F	L	E	D	d1	A			T											
22-16 A.W.G. 0.5-1.5 mm ²	FSNBS1-2 [Ⓢ]	FSNS1-2 [Ⓢ]	#2	.087 2.2	.252 6.4	.205 5.2							IZUMI MODEL 5N18 WITH DIE INDEX NO:1.25 OR K.S. MODEL KST2000D-1322 LY-2045A WITH DIE INDEX NO:1.25	1000											
	FSNB1-3.2	FSN1-3.2	#4	.126 3.2	.295 7.5														1000						
	FSNBS1-3.2	FSNS1-3.2	#4	.126 3.2	.252 6.4																				1000
	FSNB1-3.7	FSN1-3.7	#6	.146 3.7	.295 7.5																				
	FSNBS1-3.7	FSNS1-3.7	#6	.146 3.7	.252 6.4																				
	FSNBL1-3.7	FSNL1-3.7	#6	.146 3.7	.335 8.5	.283 7.2								.768 19.5	1000										
	FSNB1-4	FSN1-4	#8	.169 4.3	.295 7.5	.201 5.1								.551 14.0	1000										
	FSNBL1-4	FSNL1-4	#8	.169 4.3	.335 8.5	.283 7.2								.768 19.5	1000										
	FSNB1-5	FSN1-5	#10	.209 5.3	.295 7.5	.201 5.1								.551 14.0	1000										
	FSNBL1-5	FSNL1-5	#10	.209 5.3	.335 8.5	.283 7.2								.768 19.5	1000										
16-14 A.W.G. 1.5-2.5 mm ²	FSNB2-3.7	FSN2-3.7	#6	.146 3.7	.295 7.5	.205 5.2	.571 14.5						IZUMI MODEL 5N18 WITH DIE INDEX NO:2 OR K.S. MODEL KST2000D-1322 LY-2045A WITH DIE INDEX NO:2	1000											
	FSNBL2-3.7	FSNL2-3.7	#6	.146 3.7	.335 8.5	.283 7.2	.709 18.0							1000											
	FSNB2-4	FSN2-4	#8	.169 4.3	.295 7.5	.205 5.2	.571 14.5							1000											
	FSNBM2-4	FSNM2-4	#8	.169 4.3	.315 8.0	.268 6.8	.728 18.5							1000											
	FSNBL2-4	FSNL2-4	#8	.169 4.3	.335 8.5	.283 7.2	.709 18.0							1000											
	FSNB2-5	FSN2-5	#10	.209 5.3	.295 7.5	.205 5.2	.571 14.5							1000											
	FSNBL2-5	FSNL2-5	#10	.209 5.3	.335 8.5	.283 7.2	.709 18.0							1000											
12-10 A.W.G. 4-6 mm ²	FSNB5-3.7	FSN5-3.7	#6	.146 3.7	.335 8.5	.295 7.5	.787 20.0						IZUMI MODEL 5N18 WITH DIE INDEX NO:5.5 OR K.S. MODEL KST2000D-1322 LY-2045A WITH DIE INDEX NO:5.5	1000											
	FSNBS5-3.7	FSNS5-3.7	#6	.146 3.7	.299 7.6	.244 6.2	.728 18.5							1000											
	FSNB5-4	FSN5-4	#8	.169 4.3	.335 8.5	.295 7.5	.787 20.0							1000											
	FSNBS5-4	FSNS5-4	#8	.169 4.3	.299 7.6	.244 6.2	.728 18.5							1000											
	FSNB5-5	FSN5-5	#10	.209 5.3	.335 8.5	.295 7.5	.787 20.0							1000											
	FSNBS5-5	FSNS5-5	#10	.209 5.3	.299 7.6	.244 6.2	.728 18.5							1000											



ALL LISTED

© : NOT UL AND C-UL LISTED

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

KS Terminals:

[FSNB1-3.7](#) [FSNB1-5](#) [FSNB2-4](#) [FSNB5-4](#) [FSNB5-5](#) [FSNBL1-4](#) [FSNBL2-4](#) [FSNBM2-4](#) [FSNBS5-4](#) [FSNBS5-5](#)
[FSNB1-3.2](#) [FSNB1-4](#) [FSNB2-3.7](#) [FSNB2-5](#) [FSNBS1-3.7](#)