

Ceramic

Bandpass Filter

50Ω

3400 to 3850 MHz

BFCV-3641+



Generic photo used for illustration purposes only

CASE STYLE: JV1210C-2

Features

- small size
- temperature stable
- hermetically sealed
- LTCC construction
- excellent stopband rejection (usable to 12 GHz, 20 dB typ.)


+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Applications

- software defined radio
- WLAN
- cellular network


Functional Schematic




Typical Frequency Response



TOP VIEW



BOTTOM VIEW



Pad Connections

Input	1
Output	2
Ground	3

Electrical Specifications^(1,2) at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Center Frequency	—	—	3636	—	MHz
	Insertion Loss	F3-F6 3400-3850	—	1.9	3.5	dB
	VSWR	F4-F5 3600-3800	—	1.6	—	dB
Stop Band, Lower	Insertion Loss	F3-F6 3400-3850	—	1.7	—	:1
	Insertion Loss	DC-F1 2930	26	35	—	dB
	VSWR	DC-F1 DC-2670	—	20	—	dB
Stop Band, Upper	Insertion Loss	F7 4650	—	20	—	dB
	Insertion Loss	F8-F9 5350-9600	30	35	—	dB
	VSWR	F8-F9 5350-9600	—	20	—	:1

(1) Measured on Mini-Circuits Characterization Test Board TB-980+

(2) This filter is not intended for use as a DC Blocking circuit element. In application where DC voltage is present at either input or output ports, blocking capacitors are required at the corresponding RF port.



Maximum Ratings

Operating Temperature	-55°C to +100°C
Storage Temperature	-55°C to +100°C
RF Power Input*	0.5W max @

Permanent damage may occur if any of these limits are exceeded.

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
100	52.86	876.08
500	39.78	235.50
1000	38.14	74.48
2000	38.83	71.53
3400	1.74	1.44
3600	1.45	1.05
3800	1.57	1.23
3900	1.83	1.57
4600	17.86	19.72
5300	42.92	22.23
7000	41.47	45.89
9600	35.24	502.48
11000	25.28	93.97
12000	27.47	138.85
13000	13.31	14.68

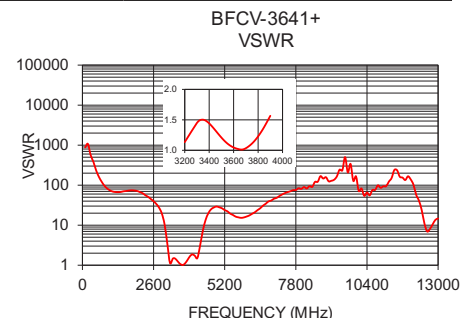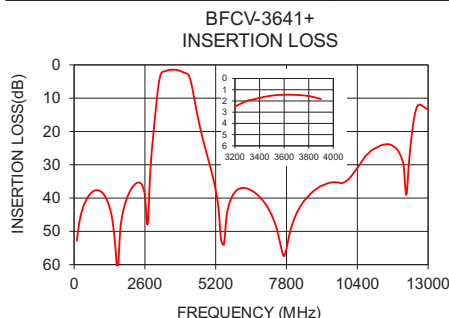

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[BFCV-3641+](#)