

Surface Mount Bandpass Filter

BPF-A355+

50Ω 310 to 400 MHz

The Big Deal

- Broader bandwidth
- High Rejection
- Good VSWR, 1.2:1 typical
- Miniature shielded package



Generic photo used for illustration purposes only

CASE STYLE: HQ1157

Product Overview

BPF-A355+ is a 50Ω bandpass filter in a shielded package fabricated using SMT technology. This bandpass filter covers from 310 to 400 MHz. This filter build with high Q capacitors and wire welded inductors for high reliability. This filter has fast roll-off and general application in the UHF range

Key Features

Feature	Advantages
Low insertion loss	Can be used in industrial and medical application
Good rejection	This enables the filter attenuate spurious signals and reject harmonics for broad frequency band
Shielded package	The small surface mount package enables the BPF-A355+ to used in compact design

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Surface Mount Bandpass Filter

50Ω 310 to 400 MHz

BPF-A355+



Generic photo used for illustration purposes only
CASE STYLE: HQ1157


Features

- Broader bandwidth
- High rejection
- Miniature shielded package


Applications

- UHF antenna
- Radio link
- Transmitters / Receivers

Functional Schematic

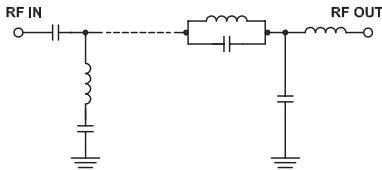

Typical Frequency Response

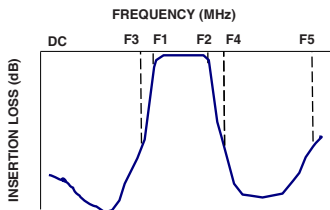

Electrical Specifications at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Center Frequency	—	—	355	—	MHz
	Insertion Loss	F1-F2	—	1.90	3.50	dB
	VSWR	F1-F2	—	1.22	1.92	:1
Stop Band, Lower	Insertion Loss	DC-F3	20	27	—	dB
	VSWR	DC-F3	—	20	—	:1
Stop Band, Upper	Insertion Loss	F4-F5	20	30	—	dB
	VSWR	F4-F5	—	20	—	:1

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.8W





Permanent damage may occur if any of these limits are exceeded.

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
1	56.16	868.59	310	9.96
201	74.51	86.86	315	9.65
211	58.58	72.39	320	9.42
237	29.66	39.49	325	9.25
249	19.42	25.19	330	9.14
265	7.19	6.71	335	9.06
273	3.28	2.78	340	9.02
300	1.14	1.13	345	9.03
310	1.08	1.10	350	9.08
355	1.15	1.17	355	9.19
400	1.77	1.12	356	9.21
411	3.18	1.89	360	9.35
420	7.37	3.62	365	9.57
427	12.75	5.25	370	9.85
435	19.95	6.81	375	10.19
445	29.71	8.90	380	10.62
450	34.93	10.07	385	11.16
570	73.46	35.46	390	11.88
750	64.45	29.46	395	12.89
1400	65.76	27.59	400	14.31

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

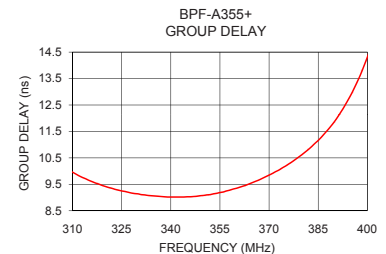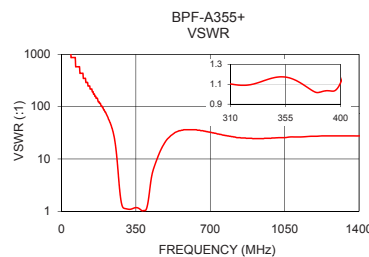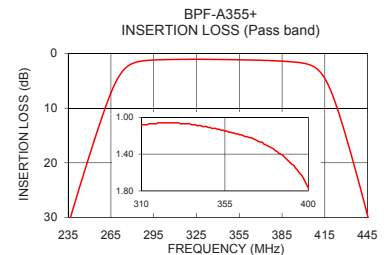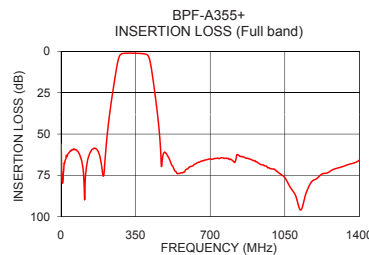

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV.B
M174392
BPF-A355+
EDU1841
URJ
190620
Page 2 of 3



Pad Connections

INPUT	1
OUTPUT	8
GROUND	2,3,4,5,6,7,9,10,11,12,13,14

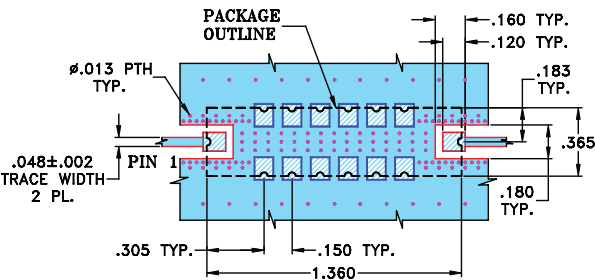
Demo Board MCL P/N: TB-363+
Suggested PCB Layout (PL-227)



- NOTE:
1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .025"±.002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

-  DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
-  DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Outline Drawing

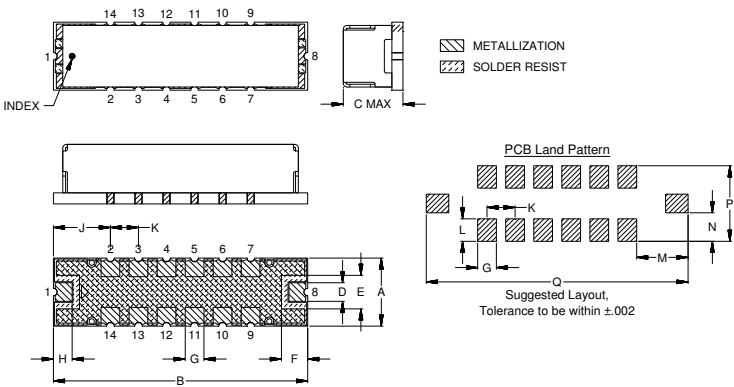

Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H
.365	1.360	.35	.100	.180	.140	.100	.100
9.27	34.54	8.89	2.54	4.57	3.56	2.54	2.54
J	K	L	M	N	P	Q	Wt.
.305	.150	.120	.275	.152	.405	1.400	grams
7.75	3.81	3.05	6.99	3.86	10.29	35.56	4.0

Note: Please refer to case style drawing for details

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[BPF-A355+](#)