

Surface Mount Directional Coupler

D17W+

50Ω 16-26 dB 700 to 3500 MHz

The Big Deal

- Excellent Power Handling, 4W
- Wide Bandwidth, 700-3500 MHz
- Small Size, 3.1 x 3.0 x 1.6mm



CASE STYLE: CA531

Product Overview

Mini-Circuits D17W+ is a MMIC Directional Coupler designed for applications from 700 to 3500 MHz. This model provides excellent power handling up to 4W in a tiny device package (3.1 x 3.0 x 1.6 mm). A built-in 50Ω termination on the isolated port simplifies circuit design and reduces component count. Manufactured using Silicon IPD technology, this model provides a high level of ESD protection and excellent reliability.

Key Features

Feature	Advantages
Wide bandwidth 700-3500 MHz	Allows a single component to be used in multiple narrowband applications reducing component count.
Low insertion loss, 0.2 - 0.6 dB including coupling loss	Can be used for sampling power amplifier output with minimal loss.
Excellent power handling; 4W (IN-OUT)	Ideal for sampling transmitter output power.
Good directivity, 14 dB typ.	Good directivity minimizes coupling of reverse power and enables accurate sampling of the thru-signal.
High operating temperature -40 to 105°C	Operation up to 105°C allows the Coupler to be used near power amplifiers with minimal change in performance.
Excellent ESD Class 1B (500 to <1000V)-HBM Class M3 (200 to <400V)-MM	Rugged ESD design prevents ESD related failures.



Surface Mount Directional Coupler

50Ω 16-26 dB 700 to 3500 MHz

D17W+

Features

- Excellent VSWR, 1.25:1 typ. at input / output
- Miniature low profile package
- Aqueous washable

Applications

- WLAN
- WMAX
- Aeronautical



Generic photo used for illustration purposes only

CASE STYLE: CA531

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost	
Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500, 1000

Electrical Specifications at 25°C

Parameter	Condition (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		700		3500	MHz
Mainline Loss ¹	700 - 1000	—	0.2	0.5	dB
	1000 - 2000	—	0.3	0.6	
	2000 - 2600	—	0.4	0.7	
	2600 - 3500	—	0.6	0.9	
Nominal Coupling	700 - 1000	—	25.9	—	dB
	1000 - 1400	—	22.9	—	
	1400 - 1700	18.9	20.7	22.4	
	1700 - 2000	17.9	19.3	20.8	
	2000 - 2300	—	18.1	—	
	2300 - 2600	15.9	17.1	18.3	
Coupling Flatness(±)	2600 - 3500	—	15.6	—	dB
	1400 - 1700	—	0.8	—	
	1700 - 2000	—	0.7	—	
	2300 - 2600	—	0.5	—	
Directivity	700 - 2000	13	16	—	dB
	2000 - 2300	11	15	—	
	2300 - 2600	9	14	—	
	2600 - 3500	—	11	—	
Return Loss (Input)	700 - 3500	—	19	—	dB
Return Loss (Output)	700 - 3500	—	19	—	dB
Return Loss (Coupling)	700 - 3500	—	13-18	—	dB
Input Power ²	700 - 3500	—	—	4.0	W
Power at Internal Termination ³	700 - 3500	—	—	23	dBm

1. Mainline loss includes theoretical power loss at coupled port.

2. 4Watt at 85°C. Derate linearly to 3W at 105°C ground lead temperature.

3. 23 dBm to 85°C. Derate linearly to +22dBm at 105°C.

Maximum Ratings⁴

Parameter	Ratings
Operating Temperature ⁵	-40°C to 105°C
Storage Temperature	-65°C to 150°C


4. Permanent damage may occur if any of these limits are exceeded.

5. Ground lead temperature

Pin Connections

Function	Pin Number
INPUT	4
OUTPUT	6
COUPLED	3
GROUND	1,2,5

Electrical Schematic



* ESD rating

Human body model (HBM): Class 1B(500 to <1000 V) in accordance with ANSI/ESD 5.1-2007


Machine model (MM): Class M3 (200 to <400 V) in accordance with ANSI/ESD SMT 5.2 1999



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M154402
D17W+
RS/CP/AM
200427
Page 2 of 3


Outline Drawing

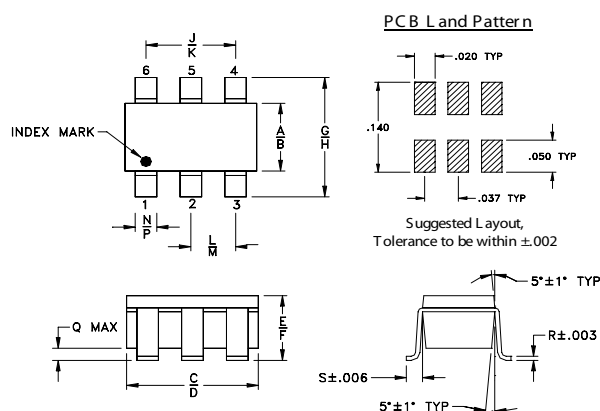

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
.052	.067	.106	.122	.035	.064	.087	.118	.067
1.32	1.70	2.69	3.10	0.89	1.63	2.21	3.00	1.70
K	L	M	N	P	Q	R	S	wt
.083	.033	.042	.012	.020	.012	.006	.018	grams
2.11	0.84	1.07	0.30	0.51	0.30	0.15	0.46	0.020


Demo Board MCL P/N: TB-396+ Suggested PCB Layout (PL-270)

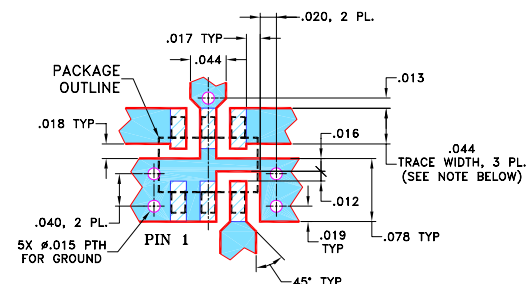

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK




Product Marking



← Family marking

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	In	Return Loss (dB) Out	Cpl
700	0.16	27.45	19.31	31.99	32.92	24.86
1000	0.20	24.42	18.93	30.64	31.77	23.08
1400	0.25	21.61	18.27	29.57	30.67	20.94
1700	0.29	20.01	17.58	28.69	29.55	19.63
2000	0.33	18.71	16.70	27.62	28.31	18.42
2300	0.37	17.61	15.61	26.14	26.88	17.26
2600	0.42	16.68	14.41	24.32	25.09	16.13
3000	0.49	15.65	12.72	21.69	22.43	14.64
3500	0.59	14.63	10.77	18.89	19.60	12.80

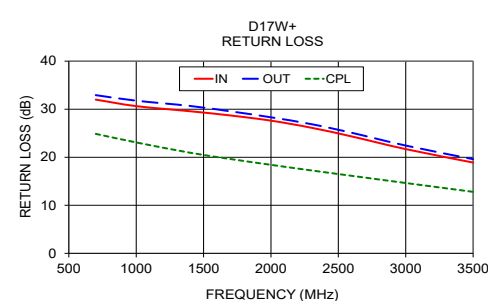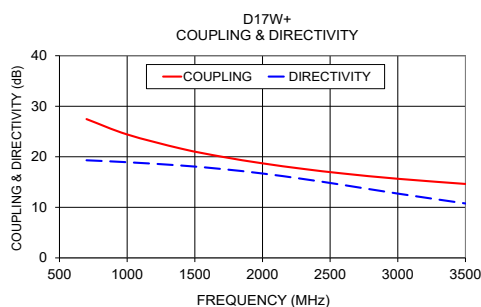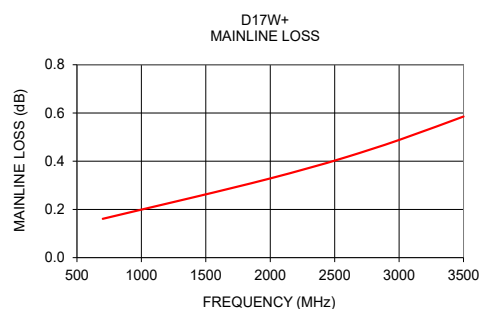

Additional Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[D17W+](#)