


System On Module iW-RainboW-G30M

Zynq UltraScale+ MPSoC System On Module

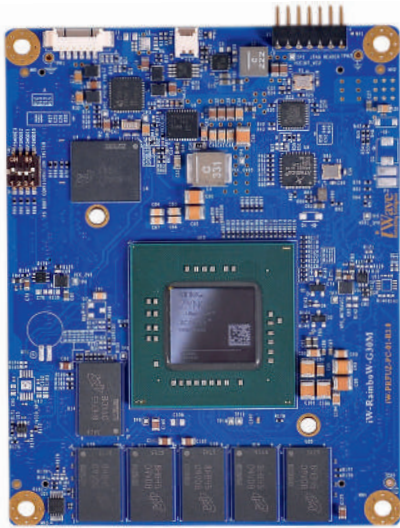

Xilinx Zynq UltraScale+ SoC based System On Module features the Xilinx's Zynq UltraScale+ SoC CG/EG/EV devices with B900 package. The MPSoC supports Quad/Dual Cortex A53 up to 1.5GHz with programmable logic cells ranging from 192K to 504K. The SOM supports high speed connectivity peripherals such as PCIe, USB3.0, SATA3.1, Display port, Gigabit Ethernet through GTR high speed transceivers from MPSoC.

APPLICATIONS: Industrial Motor Control, Sensor Fusion, ADAS/Embedded Vision, Industrial IoT, Cloud Computing, Networking, Data Center, Medical Endoscopy, Aerospace and Machine Vision.

iW-RainboW-G30M HIGHLIGHTS

- Quad/Dual Cortex A53 @ 1.5GHz
- Dual Cortex R5, ARM Mali 400 Mp2
- 16 Channels GTH Transceivers upto 16.3Gbps
- 4 Channels GTR Transceivers upto 6Gbps
- 48 LVDS Pairs/ 96 SE IOs, 46 SE FPGA IOs
- Industrial grade availability
- 10+ Years availability

SPECIFICATIONS

SoC:

Xilinx Zynq UltraScale+ ZU4/ZU5/ZU7
Quad/Dual Cortex A53 @ 1.5GHz
Dual Cortex R5, ARM Mali 400 MP2
H.265, H.264 Video Codecs

Memory:

4GB DDR4 for PS with ECC
1GB DDR4 for PL
8GB eMMC Flash (Expandable)

On SOM features:

10/100/1000 Ethernet PHY For PS
USB2.0 OTG Transceiver for PS

Headers:

JTAG, FAN

Dual Board to Board Connector Interfaces:

Zynq Ultrascale+ MPSoC PL Interfaces:

PL Transceivers x 16 @ 16.3 Gbps
48 LVDS/96 SE from HP BANK & 46 SE from HD Banks

Zynq Ultrascale+ MPSoC PS Interfaces:

Gigabit Ethernet x 1 Port
USB 2.0 OTG x 1 Port
SPI x 1 Port
CAN x 2 Ports
I2C x 1 Ports
SD x 1 Port
Debug UART
UART x 1 Port
JTAG
GEM 3 or USB1 2.0 x 1 Port
PS Transceivers x4 @ 6Gbps

OS Support: Linux

Power Supply:


5V through Board to Board connector

Temperature support:

-40°C to +85°C (Industrial grade operation)

Form Factor: 95mm x 75mm

Zynq Ultrascale+ MPSoC SOM Block Diagram

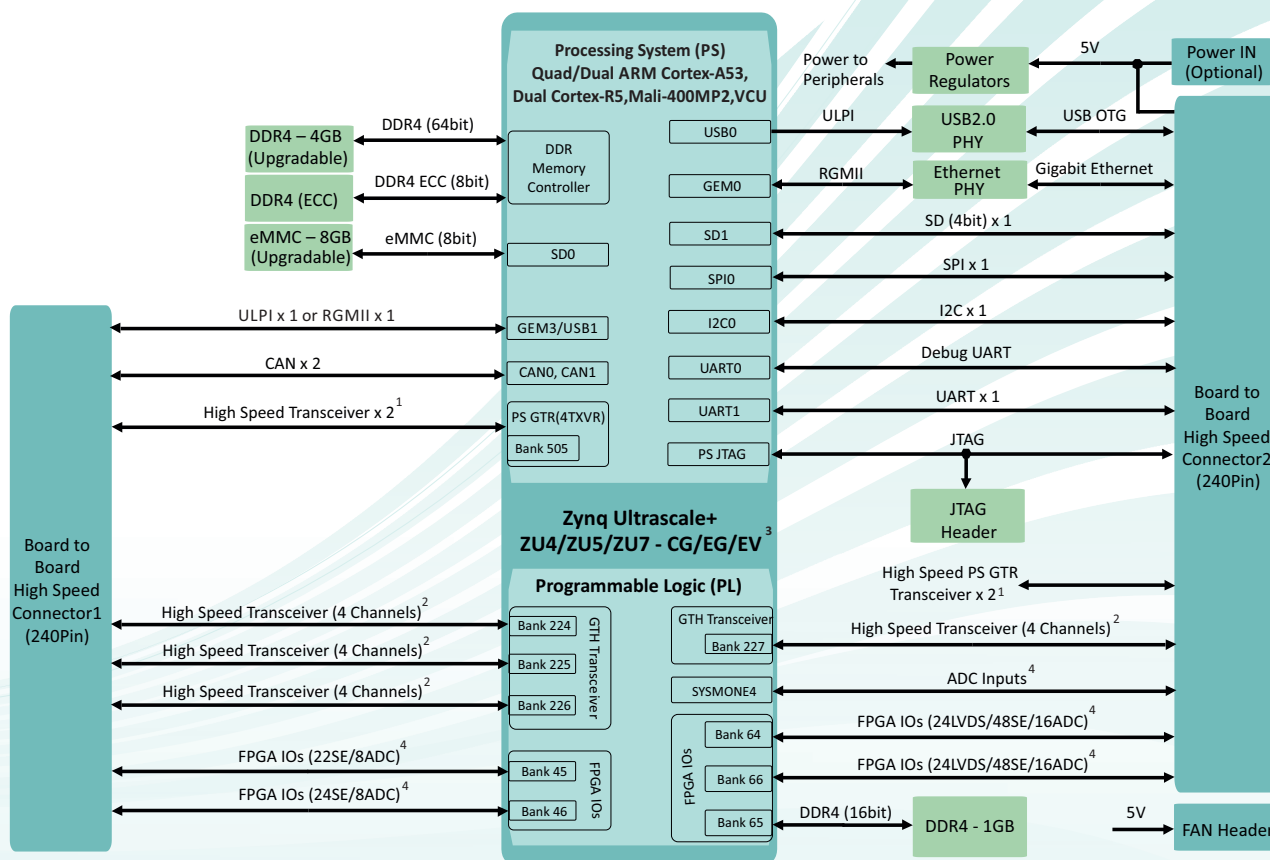

Note 1: PS GTR Transceiver supports data rates up to 6Gb/s and can be configured as PCIe/SATA/USB3.0/DisplayPort/Ethernet SGMII.

Note 2: PL GTH Transceiver supports data rates up to 16.3Gb/s

Note 3: CG devices supports Dual ARM Cortex-A53 & Dual ARM Cortex-R5. EG devices supports Quad ARM Cortex-A53, Dual ARM Cortex-R5 & Mali-400MP2 GPU. EV devices supports Quad ARM Cortex-A53, Dual ARM Cortex-R5, Mali-400MP2 GPU & H.264/H.265 VCU.

Note 4: SYSMONE4 supports 10bit 200KSPS ADC and supports upto 17 Analog Inputs (One dedicated Analog Input and 16 auxiliary analog input from any PL BANKs).

OS SUPPORT

Linux 4.14.0

DELIVERABLES

Zynq Ultrascale+ Module
Board Support Package
User Manual

OPTIONAL KITS/Modules

Zynq Ultrascale+ Development Kit
Heat Sink

CUSTOM DEVELOPMENT

BSP Development/OS Porting
Custom SOM/Carrier Development
Custom Application/GUI Development
Design Review and Support

iWave Systems Technologies, established in 1999, focuses on Product Engineering Services involving Embedded Hardware, Software & FPGA. The company designs and develops cutting edge products and solutions. iWave has been an innovator in the development of highly integrated, high performance, low power and low cost System On Modules and Development Platforms.

iWave System has won the confidence of its customers over the years by being a reliable partner in developing innovative products. Our engineers combine outstanding System design experience to deliver Quality Solutions. iWave specializes across Industrial, Automotive and Medical domains. We support our customers by being time efficient, which in turn helps our customers accelerate time to market their products. iWave is a Windows embedded Silver partner and a winner of the Partner Excellence Award.

*Optional items not included in the standard deliverables.

Note: iWave reserves the right to change these specifications without notice as part of iWave continuous effort to meet the best in breed specification. The registered trademarks are proprietary of their respective owners.



Zynq Ultrascale+ Module

The device can be ordered online from the iWave Website

<http://www.iwavesystems.com/webforms>

Or from our Local Partners in your region

<http://www.iwavesystems.com/about-us/business-partner.html>

iW-G30M-BR-R2.0

iWave Systems Tech. Pvt. Ltd.,

7/B, 29thMain, BTM Layout 2nd Stage,
Bangalore-560076, India.
Ph:+91-80-26683700, 26786245
Email: mktg@iwavesystems.com
www.iwavesystems.com

iWave Japan, Inc.

8F-B, Kannai Sumiyoshi Building,
3-29, Sumiyoshi-cho, Naka-ku,
Yokohama, Kanagawa, Japan.
Ph: +81-45-227-7626
Email: info@iwavejapan.co.jp
www.iwavejapan.co.jp

iWave Europe

Postbus 6197
3130 DD Vlaardingen
The Netherlands
Ph: +31 10 28403383
Email: info@iwavesystems.eu

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

iWave Systems:

[iW-G30M-C4CG-4E002G-E008G-BEA](#) [iW-G30M-C4CG-4E002G-E008G-BIA](#) [iW-G30M-C4CG-4E002G-E008G-LIA](#)
[iW-G30M-C5EV-4E004G-E008G-BIA](#) [iW-G30M-C5EV-4E004G-E008G-LIA](#) [iW-G30M-C7CG-4E004G-E008G-BEA](#) [iW-](#)
[G30M-C7CG-4E004G-E008G-BIA](#) [iW-G30M-C7EV-4E004G-E008G-BIA](#) [iW-G30M-C7EV-4E004G-E008G-LEA](#) [iW-](#)
[G30M-C4EV-4E002G-E008G-LIA](#) [iW-G30M-C5EV-4E004G-E008G-BEA](#) [iW-G30M-C4EG-4E002G-E008G-BEA](#) [iW-](#)
[G30M-C4EG-4E002G-E008G-BIA](#) [iW-G30M-C4EV-4E002G-E008G-BEA](#) [iW-G30M-C4EV-4E002G-E008G-BIA](#) [iW-](#)
[G30M-C7CG-4E004G-E008G-LIA](#) [iW-G30M-C7EV-4E004G-E008G-BEA](#)