


Product Summary


BV _{CEO} (V)	CTR (Min)	Isolation Voltage (V _{rms})	Operating Temperature (°C)
80	50%	5,000	-55 to +110

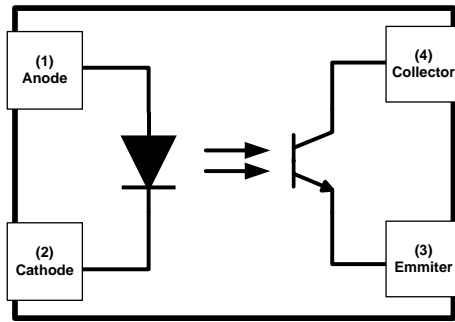


Features

- Current Transfer Ratio (CTR: min 50% at I_F = 5mA, V_{CE} = 5V)
- High Input-Output Isolation Voltage (V_{iso} = 5,000V_{rms})
- Safety Approval UL1577, No. E536221
- **Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**
- **For automotive applications requiring specific change control (i.e. parts qualified to AEC-Q100/101/104/200, PPAP capable, and manufactured in IATF 16949 certified facilities), please [contact us](https://www.diodes.com/quality/product-definitions/) or your local Diodes representative.**

Mechanical Data

- Package: DIP-4, MDIP-4, SL-4, SLM-4
- Package Material: Molded Plastic, "Green" Mold Compound. UL Flammability Classification 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish – Matte Tin-Plated Leads, Solderable per MIL-STD-202, Method 208 
- Polarity Indicator: Dot for Pin 1 Identification
- Weight: 0.216 grams (Approximate)

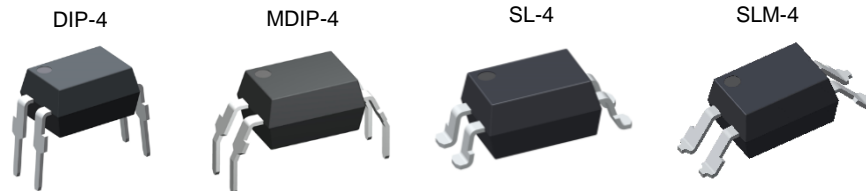


Ordering Information (Notes 4 & 5)

Part Number	Package	Packing	
		Qty.	Carrier
DPC816D-x-TU	DIP-4	100pcs	Tube
DPC816W-x-TU	MDIP-4	100pcs	Tube
DPC816D-x-TU-V	DIP-4 (VDE Parts)	100pcs	Tube
DPC816W-x-TU-V	MDIP-4 (VDE Parts)	100pcs	Tube
DPC816S-x-TR	SL-4	2,000pcs	Reel
DPC816L-x-TR	SLM-4	2,000pcs	Reel
DPC816S-x-TR-V	SL-4 (VDE Parts)	2,000pcs	Reel
DPC816L-x-TR-V	SLM-4 (VDE Parts)	2,000pcs	Reel

- Notes:
1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
 2. See <https://www.diodes.com/quality/lead-free/> for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
 3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
 4. For packaging details, go to our website at <https://www.diodes.com/design/support/packaging/diodes-packaging/>.
 5. x is CTR rank, symbol: A, B, C, X, Y.

Marking Information



 = Manufacturer's Code Marking
 816 = Product Type Marking Code
 Z = CTR Rank Code
 V = VDE Safety Mark Option
 Y = Last Digit of Year (ex: 4 = 2024)
 WW = Week Code (01 to 53)

Maximum Ratings (@T_A = +25°C, unless otherwise specified.)

Characteristic		Symbol	Value	Unit
Input	Forward Current	I _F	60	mA
	Reverse Voltage	V _R	6	V
	Power Dissipation	P	100	mW
	Peak Forward Current ($< 1\mu\text{s}$ Pulse Width, 300pps)	I _{FP}	1	A
Output	Collector – Emitter Voltage	V _{CEO}	80	V
	Emitter – Collector Voltage	V _{ECO}	6	V
	Collector Current	I _C	50	mA
	Collector Power Dissipation	P _C	150	mW
Total Power Dissipation		P _{tot}	200	mW
Isolation Voltage		V _{iso}	5000	V _{RMS}
Operating Temperature		T _{opr}	-55 to +110	°C
Storage Temperature		T _{stg}	-55 to +125	°C
Soldering Temperature		T _{sol}	+260	°C

Electrical Characteristics (@T_A = +25°C, unless otherwise specified.)

Characteristic		Test Condition	Symbol	Min	Typ	Max	Unit
Input	Forward Voltage	I _F = 20mA	V _F	—	1.25	1.5	V
	Reverse Current	V _R = 4V	I _R	—	—	10	μA
	Terminal Capacitance	V = 0, f = 1kHz	C _t	—	30	—	pF
Output	Collector – Emitter Current	V _{CE} = 20V, I _F = 0	I _{CEO}	—	—	50	nA
	Collector – Emitter Breakdown Voltage	I _C = 0.1mA, I _F = 0	BV _{CEO}	80	—	—	V
	Emitter – Collector Breakdown Voltage	I _E = 0.1mA, I _F = 0	BV _{ECO}	6	—	—	V
Transfer Characteristics	Collector Current	I _F = 5mA, V _{CE} = 5V	I _C	2.5	—	30	mA
	Current Transfer Ratio	I _F = 5mA, V _{CE} = 5V	CTR	50	—	600	%
	Collector – Emitter Saturation Voltage	I _F = 20mA, I _C = 1mA	V _{CE(sat)}	—	0.1	0.2	V
	Isolation Resistance	DC500V, 40% to 60% R.H	R _{iso}	5 x 10 ¹⁰	1 x 10 ¹¹	—	Ω
	Floating Capacitance	V = 0, f = 1MHz	C _f	—	0.6	1	pF
	Cutoff Frequency	V _{CE} = 5V, I _C = 2mA R _L = 100Ω, -3dB	f _c	—	80	—	kHz
	Response Time (Rise)	V _{CE} = 2V, I _C = 2mA	t _r	—	—	18	μs
	Response Time (Fall)	R _L = 100Ω	t _f	—	—	18	μs

Rank Table of Current Transfer Ratio (Note 6)

Characteristic	Test Condition	Symbol	Min	Max	Unit
CTR Rank	I _F = 5mA, V _{CE} = 5V T _A = +25°C	A	80	160	%
		B	130	260	%
		C	200	400	%
		X	100	200	%
		Y	150	300	%

Note: 6. CTR = I_C / I_F x 100%

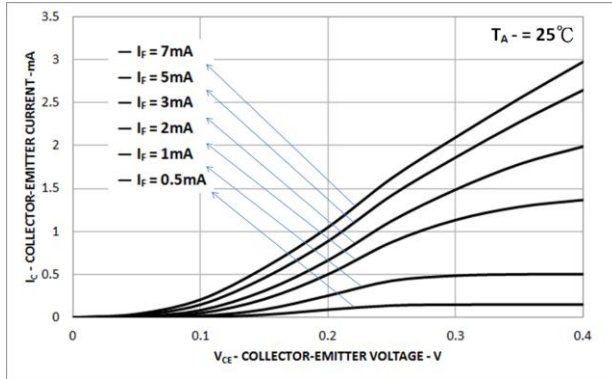


Figure 1. Collector-Emitter Saturation Voltage vs. Forward Current

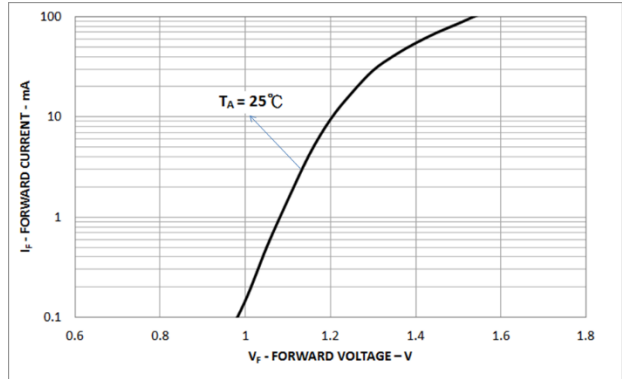


Figure 2. Forward Current vs. Forward Voltage

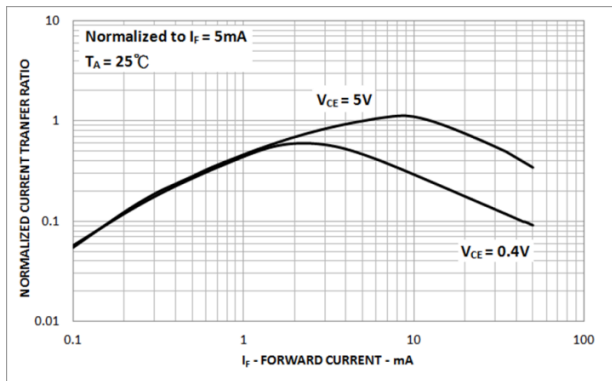


Figure 3. Current Transfer vs. Forward Current

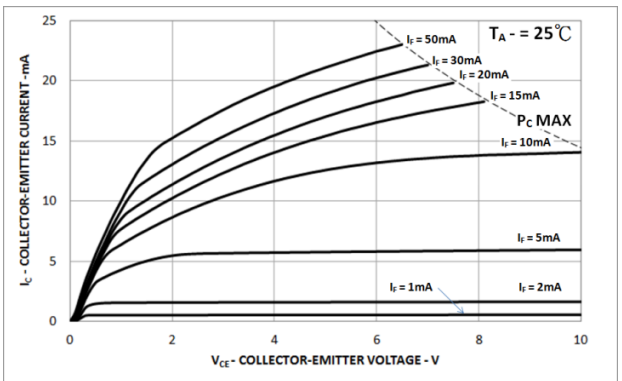


Figure 4. Collector Current vs. Collector-Emitter Voltage

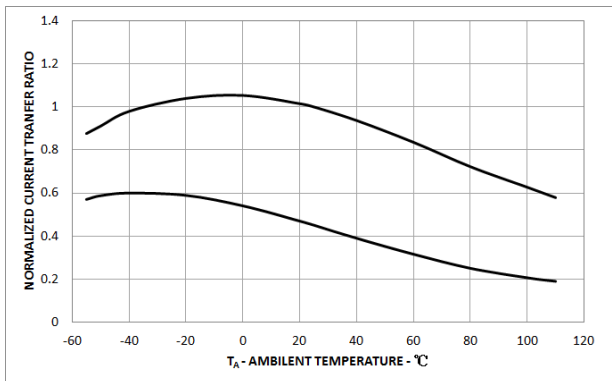


Figure 5. Relative Current Transfer Ratio vs. Ambient Temperature

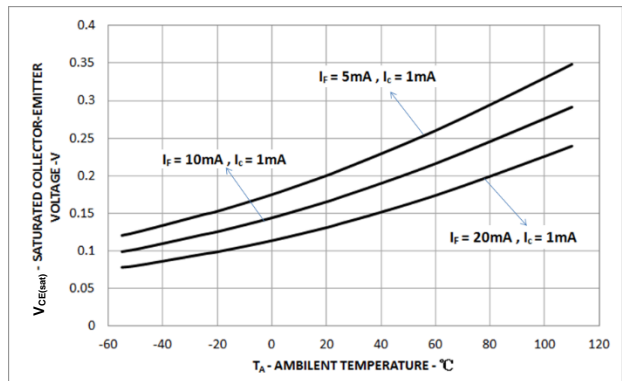


Figure 6. Collector-Emitters Saturation Voltage vs. Ambient Temperature

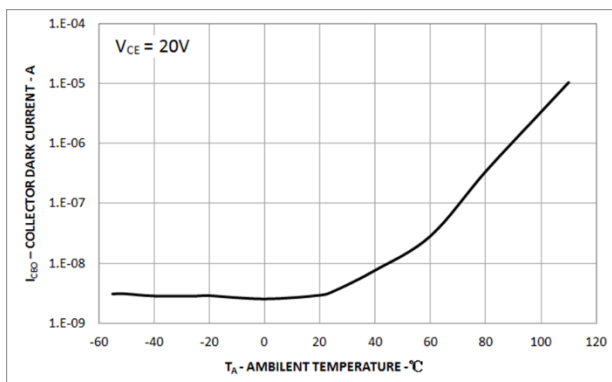


Figure 7. Collector Dark Current vs. Ambient Temperature


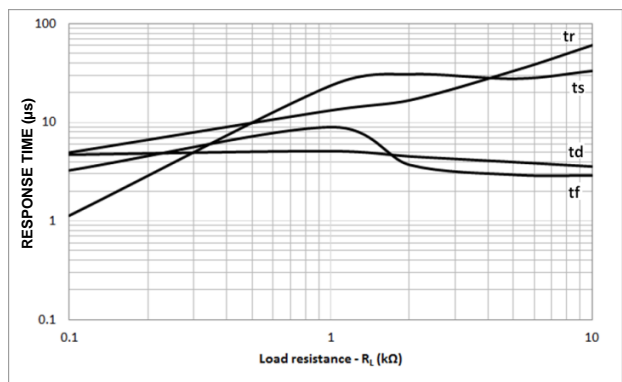


Figure 8. Response Time vs. Load Resistance

Package Outline Dimensions


Please see <http://www.diodes.com/package-outlines.html> for the latest version.

DIP-4

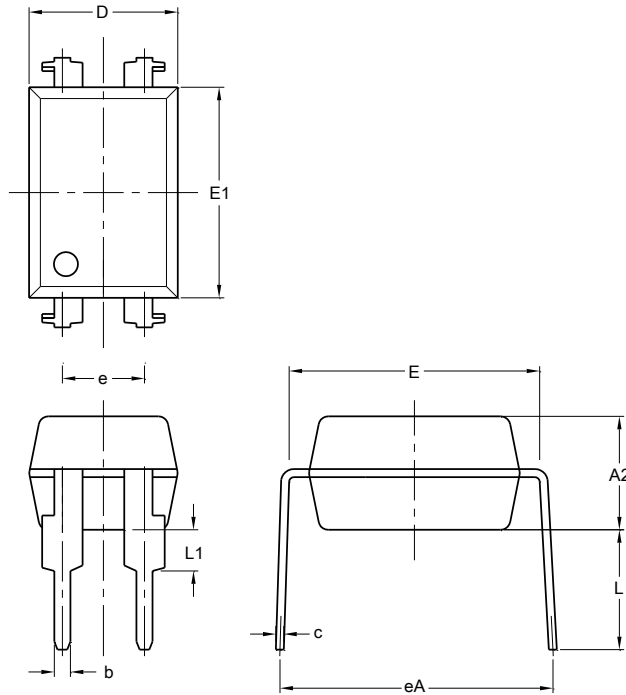

DIP-4			
Dim	Min	Max	Typ
A2	3.20	3.80	3.50
b	0.40	0.60	0.50
c	0.15	0.35	0.25
D	4.30	4.90	4.60
E	7.32	7.92	7.62
E1	6.20	6.80	6.50
eA	8.07	9.07	8.57
e	2.29	2.79	2.54
L	3.40	4.00	3.70
L1	0.67	1.27	0.97
All Dimensions in mm			

MDIP-4

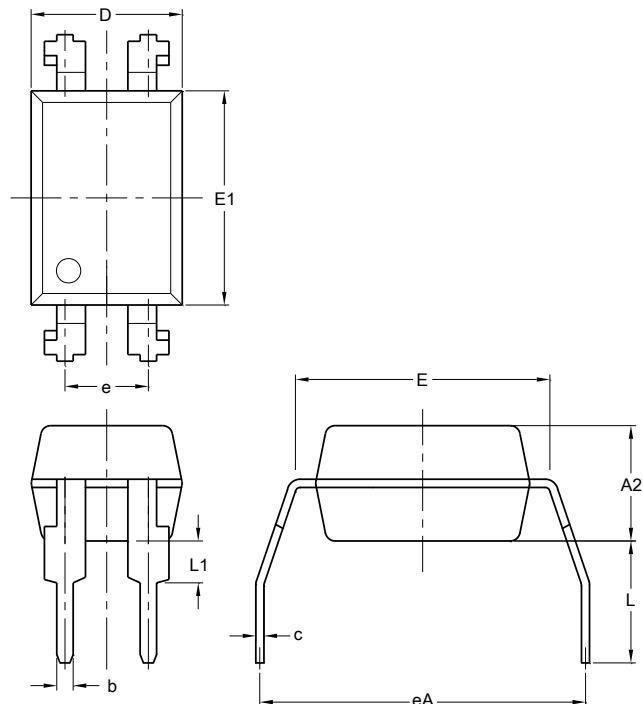


MDIP-4			
Dim	Min	Max	Typ
A2	3.20	3.80	3.50
b	0.40	0.60	0.50
c	0.15	0.35	0.25
D	4.30	4.90	4.60
E	7.32	7.92	7.62
E1	6.20	6.80	6.50
eA	9.66	10.66	10.16
e	2.29	2.79	2.54
L	3.40	4.00	3.70
L1	0.67	1.27	0.97
All Dimensions in mm			

Package Outline Dimensions (continued)


Please see <http://www.diodes.com/package-outlines.html> for the latest version.

SL-4

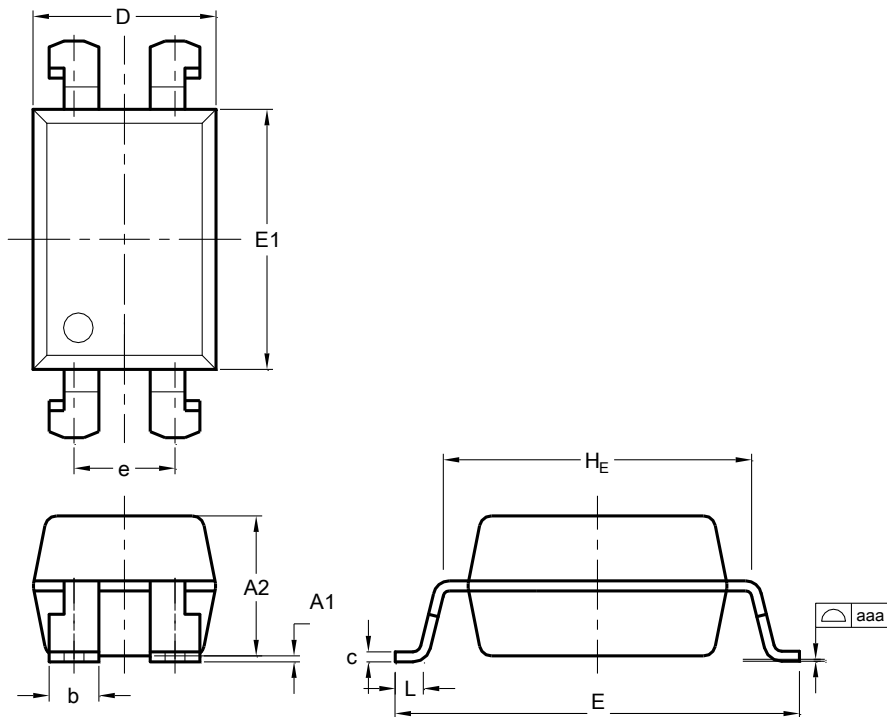

SL-4			
Dim	Min	Max	Typ
A1	0.00	0.30	0.15
A2	3.20	3.80	3.50
b	1.15	1.35	1.25
c	0.15	0.35	0.25
D	4.30	4.90	4.60
E	9.86	10.46	10.16
E1	6.20	6.80	6.50
e	2.29	2.79	2.54
H _E	7.32	7.92	7.62
L	0.60	--	--
aaa	--	0.10	--
All Dimensions in mm			

SLM-4

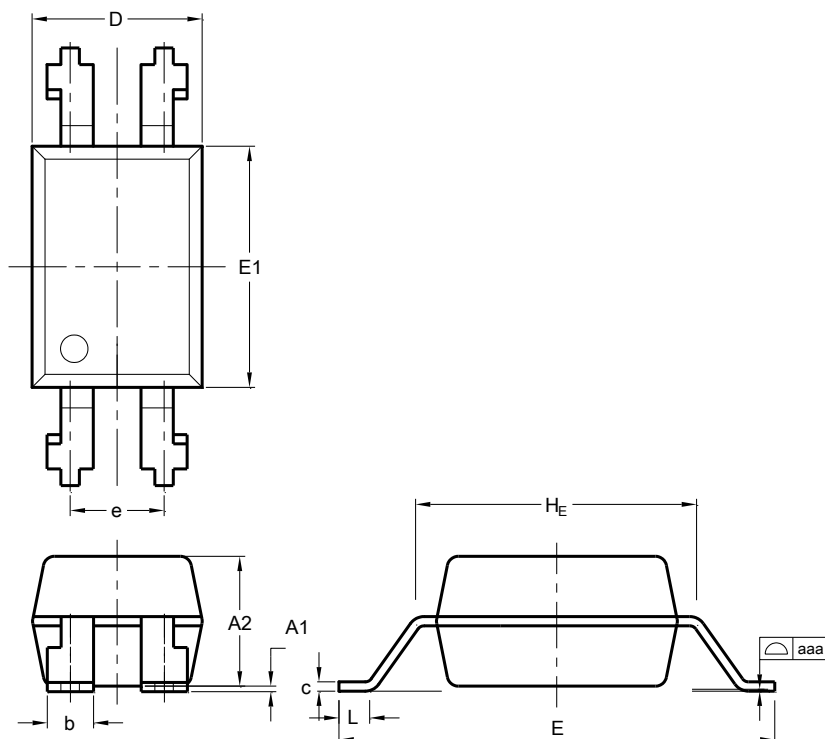


SLM-4			
Dim	Min	Max	Typ
A1	0.00	0.30	0.15
A2	3.20	3.80	3.50
b	1.15	1.35	1.25
c	0.15	0.35	0.25
D	4.30	4.90	4.60
E	11.50	12.10	11.88
E1	6.20	6.80	6.50
e	2.29	2.79	2.54
H _E	7.32	7.92	7.62
L	0.60	--	--
aaa	--	0.10	--
All Dimensions in mm			

Suggested Pad Layout


Please see <http://www.diodes.com/package-outlines.html> for the latest version.

SL-4

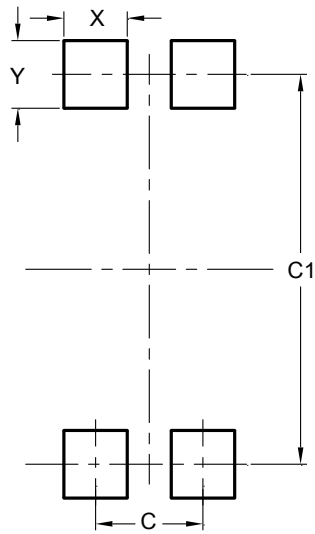

Dimensions	Value (in mm)
C	2.54
C1	9.22
X	1.50
Y	1.60

SLM-4

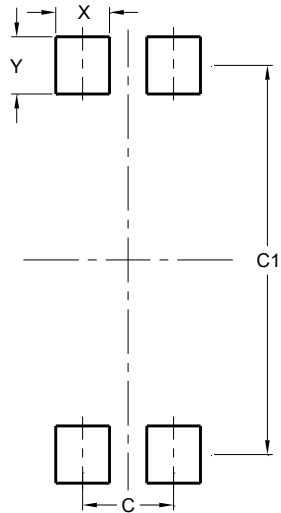

Dimensions	Value (in mm)
C	2.54
C1	10.86
X	1.50
Y	1.60

IMPORTANT NOTICE

1. DIODES INCORPORATED (Diodes) AND ITS SUBSIDIARIES MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).
2. The Information contained herein is for informational purpose only and is provided only to illustrate the operation of Diodes' products described herein and application examples. Diodes does not assume any liability arising out of the application or use of this document or any product described herein. This document is intended for skilled and technically trained engineering customers and users who design with Diodes' products. Diodes' products may be used to facilitate safety-related applications; however, in all instances customers and users are responsible for (a) selecting the appropriate Diodes products for their applications, (b) evaluating the suitability of Diodes' products for their intended applications, (c) ensuring their applications, which incorporate Diodes' products, comply the applicable legal and regulatory requirements as well as safety and functional-safety related standards, and (d) ensuring they design with appropriate safeguards (including testing, validation, quality control techniques, redundancy, malfunction prevention, and appropriate treatment for aging degradation) to minimize the risks associated with their applications.
3. Diodes assumes no liability for any application-related information, support, assistance or feedback that may be provided by Diodes from time to time. Any customer or user of this document or products described herein will assume all risks and liabilities associated with such use, and will hold Diodes and all companies whose products are represented herein or on Diodes' websites, harmless against all damages and liabilities.
4. Products described herein may be covered by one or more United States, international or foreign patents and pending patent applications. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks and trademark applications. Diodes does not convey any license under any of its intellectual property rights or the rights of any third parties (including third parties whose products and services may be described in this document or on Diodes' website) under this document.
5. Diodes' products are provided subject to Diodes' Standard Terms and Conditions of Sale (<https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/>) or other applicable terms. This document does not alter or expand the applicable warranties provided by Diodes. Diodes does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.
6. Diodes' products and technology may not be used for or incorporated into any products or systems whose manufacture, use or sale is prohibited under any applicable laws and regulations. Should customers or users use Diodes' products in contravention of any applicable laws or regulations, or for any unintended or unauthorized application, customers and users will (a) be solely responsible for any damages, losses or penalties arising in connection therewith or as a result thereof, and (b) indemnify and hold Diodes and its representatives and agents harmless against any and all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim relating to any noncompliance with the applicable laws and regulations, as well as any unintended or unauthorized application.
7. While efforts have been made to ensure the information contained in this document is accurate, complete and current, it may contain technical inaccuracies, omissions and typographical errors. Diodes does not warrant that information contained in this document is error-free and Diodes is under no obligation to update or otherwise correct this information. Notwithstanding the foregoing, Diodes reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes.
8. Any unauthorized copying, modification, distribution, transmission, display or other use of this document (or any portion hereof) is prohibited. Diodes assumes no responsibility for any losses incurred by the customers or users or any third parties arising from any such unauthorized use.
9. This Notice may be periodically updated with the most recent version available at <https://www.diodes.com/about/company/terms-and-conditions/important-notice>

The Diodes logo is a registered trademark of Diodes Incorporated in the United States and other countries.
All other trademarks are the property of their respective owners.
© 2024 Diodes Incorporated. All Rights Reserved.

www.diodes.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Diodes Incorporated:](#)

[DPC816L-X-TR-V](#) [DPC816W-C-TU](#) [DPC816W-X-TU](#) [DPC816D-Y-TU-V](#) [DPC816S-X-TR](#) [DPC816D-C-TU](#)
[DPC816W-Y-TU](#) [DPC816L-A-TR-V](#) [DPC816S-Y-TR](#) [DPC816L-C-TR-V](#) [DPC816L-C-TR](#) [DPC816W-Y-TU-V](#)
[DPC816D-Y-TU](#) [DPC816S-X-TR-V](#) [DPC816D-X-TU](#) [DPC816L-B-TR-V](#) [DPC816D-A-TU-V](#) [DPC816D-B-TU-V](#)
[DPC816L-Y-TR](#) [DPC816D-A-TU](#) [DPC816L-B-TR](#) [DPC816W-X-TU-V](#) [DPC816D-B-TU](#) [DPC816L-Y-TR-V](#) [DPC816S-](#)
[A-TR](#) [DPC816S-C-TR](#) [DPC816S-Y-TR-V](#) [DPC816W-A-TU-V](#) [DPC816L-X-TR](#) [DPC816W-B-TU-V](#) [DPC816W-C-TU-V](#)
[DPC816D-C-TU-V](#) [DPC816S-B-TR-V](#) [DPC816W-A-TU](#) [DPC816D-X-TU-V](#) [DPC816S-A-TR-V](#) [DPC816W-B-TU](#)
[DPC816L-A-TR](#) [DPC816S-C-TR-V](#) [DPC816S-B-TR](#)