
**Mounting Option** 


12-.128 (3.25) Dia. Side Mounting Holes

#### **Contact Detail**

523-P.C. Tail .025 Sq.(0.64 Sq.) - Tail LG=.390(9.91)

.156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

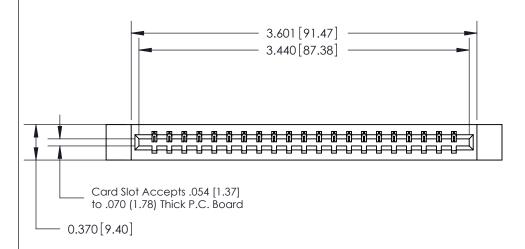

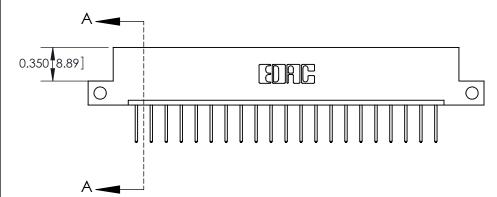


THIS IS A C.A.D. GENERATED DRAWING



ISSUE NUMBER

ORIGINAL



## **See Accompanying Page for:**

- Bend Detail
- Mounting Options
- Features and Specifications

333 Series Card Edge Connector Part Number: 333-021-523-112

EDNG

EDAC INC TORONTO, ONTARIO CANADA

YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF EDAC INC. AND
SHALL NOT BE REPRODUCED OR COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

	ACAD REFERENCE NO	. 333 ENG MASTER
	DRAWN: J.LEE	DATE: OCT. 14/09
	CHECKED:	DATE:
	SCALE: NTS	SHEET 1 OF 4
)	DRAWING NUMBER	ISSUE

AWING NUMBER ISSUE 333 Assembly 1

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

1



333 Series Card Edge Conn	ACAD REFERENCE NO. 333 ENG MASTER			
Contact Bend Detail	DRAWN: J.LEE	DATE: OCT. 14/09		
Contact bend Detail		CHECKED:	DATE:	
EDAC INC			SHEET 2	2 OF 4
TORONTO, ONTARIO  ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIED OR LISED AS THE RASIS FOR THE	DRAWING NUMBER		ISSUE	
YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS	333 Assembly		1

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER



1220F NOWRE

ORIGINAL

1



333 Series Card Edge Connector			ACAD REFERENCE NO. 333 ENG MASTER			
Mounting Options		DRAWN:	J.LEE	DATE: O	CT. 14/09	
		CHECKED:		DATE:		
EDAC INC			NTS	SHEET ;	3 OF 4	
TORONTO, ONTARIO	OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	DRAWING	NUMBER		ISSUE	
YOUR CONNECTION TO QUALITY & SERVIC		33	33 Assembly		1	

ISSUE NUMBER

ORIGINAL



### **Features**

- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree, & Extender Board Bends
- Single or Dual Row Configurations
- Variety of Mounting Options, Flush or Offset Lugs
- Accepts Between Contact and In-Contact Polarizing Keys

## **Specifications**

- Insulator Material: Thermoplastic Polyester, UL 94V-0, Colour: Green
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +105 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

333 Series Card Edge Connector	ACAD REFERENCE NO. 333 ENG MASTER
Features and Specifications	DRAWN: J.LEE DATE: OCT. 14/09
realities and specifications	CHECKED: DATE:
	WINGS AND SPECIFICATIONS SCALE: NTS SHEET 4 OF 4
I SI I I ORONTO, ONTARIO SHALL NOT	BE REPRODUCED, OR COPIED DRAWING NUMBER ISSUE
	JRE OR SALE OF APPARATUS 333 Assombly 1

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

EDAC:

333-021-523-112