

#### **Mounting Option**

03-.116 (2.95) I.D. Floating Eyelets

#### **Contact Detail**

544-Wire Wrap .050x.025(1.27x0.64) - Tail LG=.750(19.05) .156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

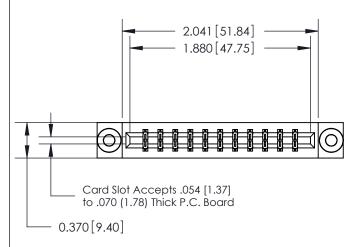


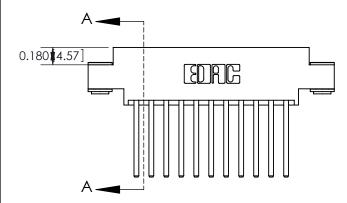

## **See Accompanying Page for:**

- Bend Detail
- **Mounting Options**
- **Features and Specifications**



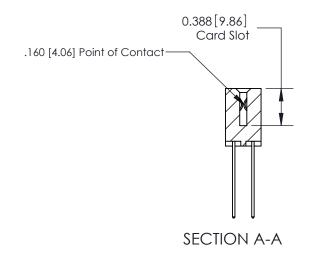

333 Series Card Edge Connecto	r
Part Number: 333-022-544-803	



	ACAD REFERENCE NO. 333 ENG MASTER			
	DRAWN: J.LEE	DATE: OCT. 14/09		
	CHECKED:	DATE:		
	SCALE: NTS	SHEET 1 OF 4		
D	DRAWING NUMBER	ISSUE		

333 Assembly

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

1



333 Series Card Edge Conn	3 Series Card Edge Connector ACAD REFERENCE NO. 333 ENG MASTER			
Contact Bend Detail	DRAWN: J.LEE	DATE: OC	T. 14/09	
Contact bend betail		CHECKED:	DATE:	
EDAC INC THESE DRAWINGS AND SPECIFICATIONS		SCALE: NTS	SHEET 2	2 OF 4
	SHALL NOT BE REPRODUCED,OR COPIED  OR USED AS THE BASIS FOR THE	DRAWING NUMBER		ISSUE
OUR CONNECTION TO QUALITY & SERVICE OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		333 Assembly		1

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER



1220F NOWRE

ORIGINAL

1



333 Series Card Edge Connector			333 Series Card Edge Connector  ACAD REFERENCE NO. 333 ENG MASTER				
Mounting Options		DRAWN:	J.LEE	DATE: O	CT. 14/09		
		CHECKED	:	DATE:			
EDAC INC THESE DRAWINGS AND SPECIFICATIONS		SCALE:	NTS	SHEET ;	3 OF 4		
	TORONTO, ONTARIO ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIED	DRAWING	NUMBER		ISSUE		
YOUR CONNECTION TO QUALITY & SERVICE WITHOUT WRITTEN PERMISSION.	MANUFACTURE OR SALE OF APPARATUS	33	33 Assembly		1		

ISSUE NUMBER

ORIGINAL



### **Features**

- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree, & Extender Board Bends
- Single or Dual Row Configurations
- Variety of Mounting Options, Flush or Offset Lugs
- Accepts Between Contact and In-Contact Polarizing Keys

## **Specifications**

- Insulator Material: Thermoplastic Polyester, UL 94V-0, Colour: Green
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +105 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

333 Series Card Edge Connector	ge Connector  ACAD REFERENCE NO. 333 ENG MASTER			
Features and Specifications	DRAWN: J.LEE DATE: OCT. 14/09			
realities and specifications	CHECKED: DATE:			
	WINGS AND SPECIFICATIONS SCALE: NTS SHEET 4 OF 4			
TORONTO, ONTARIO SHALL NOT BE REPRODUCED, OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	BE REPRODUCED, OR COPIED DRAWING NUMBER ISSUE			
	JRE OR SALE OF APPARATUS 333 Assombly 1			

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

EDAC:

333-022-544-803