


PART NO: DCFS Series

M12-A Male Front Mount M16 Receptacle

Drawing

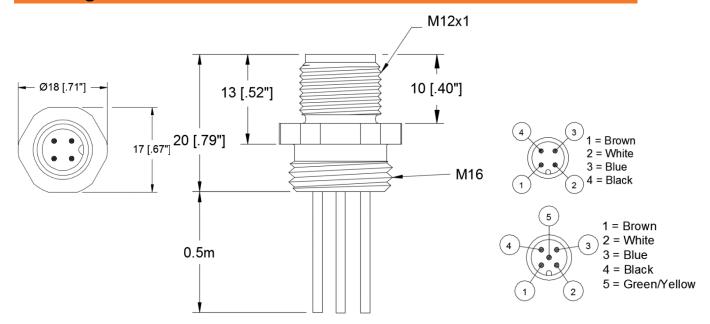

Technical Data

Mechanical

IVIECIIallical			
Receptacle Style	M12, Male		
Applicable Specification	IEC 61076-2-101		
Receptacle Threads	External		
Housing	Stainless Steel		
Insert	BPT		
Contact	Copper Alloy, Gold Plated		
Mounting Orientation	Front		
Panel Nut	Stainless Steel		
O-Ring	EPDM		
Electrical			
Contact Resistance	≤ 5 mΩ		
Nom. Current @ 40°C	4 A		
Rated Voltage	4 Pole 250 V (IEC) 300V (UL)		
	5 Pole 60 V (IEC) 30V (UL)		
UL File	E485156		
Lead Wires			
AWG	22 AWG (7/30) Tinned Copper		
	(20 AWG for Green/Yellow)		
Insulation	PVC		
Outside Diameter	0.062" Nominal		



PART NO: DCFS Series M12-A Male Front Mount M16 Receptacle

Lead Length	0.5 Meters (19.7")			
UL Style		AWM 1007 & 1569		
CSA Style		TR64		
Environmental				
Degree of Protection		IP 67 / NEMA 6P (IP67 / IP69K for 308DCFS)		
Operating Temperature Range		-25C (-13F)/ +70C (+158F)		
CE		All materials used in the r this part meet the require European Directive 2011/ the restriction of use of co substances in electrical an equipment. Exemption us	ements of '65/EU regarding ertain hazardous and electronic	
REACH Regulation (EC 1907/2006)		This product does not contain Substances of Very High Concern (SVHC) listed on the European Union's REACH candidate list in excess of 0.1% mass of the item.		
Ordering Information	Description		Quantity	
305DCFS NC404	4 Pin		Each	
307DCFS NC404	5 Pin		Each	
308DCFS NC404	5 Pin – Circuit Board Mount Each			

Although Alpha Wire ("Alpha") makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability. Alpha provides the information and specification herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Alpha be liable any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Alpha has been advised of the possibility of such damages, whether in an action under contact, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specification described herein.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Alpha Wire: 307DCFS NC404