



solid-state time-delayed front-side auxiliary switch Time range 0.05...1 s, 200 ... 240 V AC, 1 NO contact, 1 NC contact ON delay, for 3RT1

product brand name	SIRIUS
product designation	auxiliary switch
design of the product	slow-operating
product type designation	3RT19
<b>General technical data</b>	
size of contactor can be combined company-specific	S6 ... S12
product component semi-conductor output	No
product extension required remote control	No
product extension optional remote control	No
insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value	300 V
degree of pollution	3
surge voltage resistance rated value	4 000 V
shock resistance according to IEC 60068-2-27	11g / 15 ms
vibration resistance according to IEC 60068-2-6	10 ... 55 Hz: 0.35 mm
mechanical service life (operating cycles) typical	10 000 000
electrical endurance (operating cycles) at AC-15 at 230 V typical	100 000
adjustable time	0.05 ... 1 s
relative setting accuracy relating to full-scale value	15 %
recovery time	150 ms
reference code according to IEC 81346-2	K
active principle	electronic
relative repeat accuracy	1 %
Substance Prohibitance (Date)	07/01/2006
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8
Weight	0.104 kg
<b>Product Function</b>	
product function star-delta circuit	No
<b>Control circuit/ Control</b>	
type of voltage of the control supply voltage	AC
control supply voltage 1 at AC	
• at 50 Hz	200 ... 240 V
• at 60 Hz	200 ... 240 V
control supply voltage frequency 1	50 ... 60 Hz
operating range factor control supply voltage rated value at AC at 50 Hz	
• initial value	0.85
• full-scale value	1.1
operating range factor control supply voltage rated value at AC at 60 Hz	

<ul style="list-style-type: none"> <li>• initial value</li> </ul>	0.85
<ul style="list-style-type: none"> <li>• full-scale value</li> </ul>	1.1
<b>Switching Function</b>	
<b>switching function</b> <ul style="list-style-type: none"> <li>• ON-delay</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• ON-delay/instantaneous contact</li> </ul>	No
<ul style="list-style-type: none"> <li>• passing make contact</li> </ul>	No
<ul style="list-style-type: none"> <li>• passing make contact/instantaneous contact</li> </ul>	No
<ul style="list-style-type: none"> <li>• OFF delay</li> </ul>	No
<b>switching function</b> <ul style="list-style-type: none"> <li>• flashing symmetrically with interval start/instantaneous</li> </ul>	No
<ul style="list-style-type: none"> <li>• flashing symmetrically with interval start</li> </ul>	No
<ul style="list-style-type: none"> <li>• flashing symmetrically with pulse start/instantaneous</li> </ul>	No
<ul style="list-style-type: none"> <li>• flashing symmetrically with pulse start</li> </ul>	No
<ul style="list-style-type: none"> <li>• flashing asymmetrically with interval start</li> </ul>	No
<ul style="list-style-type: none"> <li>• flashing asymmetrically with pulse start</li> </ul>	No
<b>switching function</b> <ul style="list-style-type: none"> <li>• constant clock cycle with pulse start</li> </ul>	No
<ul style="list-style-type: none"> <li>• constant clock cycle with interval start</li> </ul>	No
<b>switching function</b> <ul style="list-style-type: none"> <li>• variably clocked with pulse start</li> </ul>	No
<ul style="list-style-type: none"> <li>• variably clocked with interval start</li> </ul>	No
<b>switching function</b> <ul style="list-style-type: none"> <li>• star-delta circuit with delay time</li> </ul>	No
<ul style="list-style-type: none"> <li>• star-delta circuit</li> </ul>	No
<b>switching function with control signal</b> <ul style="list-style-type: none"> <li>• additive ON-delay</li> </ul>	No
<ul style="list-style-type: none"> <li>• passing break contact</li> </ul>	No
<ul style="list-style-type: none"> <li>• passing break contact/instantaneous</li> </ul>	No
<ul style="list-style-type: none"> <li>• OFF delay</li> </ul>	No
<ul style="list-style-type: none"> <li>• OFF delay/instantaneous</li> </ul>	No
<ul style="list-style-type: none"> <li>• pulse delayed</li> </ul>	No
<ul style="list-style-type: none"> <li>• pulse delayed/instantaneous</li> </ul>	No
<ul style="list-style-type: none"> <li>• pulse-shaping</li> </ul>	No
<ul style="list-style-type: none"> <li>• pulse-shaping/instantaneous</li> </ul>	No
<ul style="list-style-type: none"> <li>• additive ON-delay/instantaneous</li> </ul>	No
<ul style="list-style-type: none"> <li>• ON-delay/OFF-delay</li> </ul>	No
<ul style="list-style-type: none"> <li>• ON-delay/OFF-delay/instantaneous</li> </ul>	No
<ul style="list-style-type: none"> <li>• passing make contact</li> </ul>	No
<ul style="list-style-type: none"> <li>• passing make contact/instantaneous contact</li> </ul>	No
<b>switching function of interval relay with control signal</b> <ul style="list-style-type: none"> <li>• retrotriggerable with deactivated control signal/instantaneous contact</li> </ul>	No
<ul style="list-style-type: none"> <li>• retrotriggerable with switched-on control signal</li> </ul>	No
<ul style="list-style-type: none"> <li>• retrotriggerable with switched-on control signal/instantaneous contact</li> </ul>	No
<ul style="list-style-type: none"> <li>• retriggerable with deactivated control signal</li> </ul>	No
<b>design of the control terminal non-floating</b>	No
<b>Short-circuit protection</b>	
design of the fuse link for short-circuit protection of the auxiliary switch required	fuse gL/gG: 4 A
<b>Auxiliary circuit</b>	
<b>number of NC contacts</b> <ul style="list-style-type: none"> <li>• delayed switching</li> </ul>	1
<ul style="list-style-type: none"> <li>• instantaneous contact</li> </ul>	0
<b>number of NO contacts</b> <ul style="list-style-type: none"> <li>• delayed switching</li> </ul>	1
<ul style="list-style-type: none"> <li>• instantaneous contact</li> </ul>	0
<b>number of CO contacts</b> <ul style="list-style-type: none"> <li>• delayed switching</li> </ul>	0
<ul style="list-style-type: none"> <li>• instantaneous contact</li> </ul>	0

<b>operational current of auxiliary contacts at AC-15</b> • maximum	3 A
<b>operational current of auxiliary contacts as NC contact at AC-15</b> • at 24 V • at 250 V	3 A 3 A
<b>operational current of auxiliary contacts as NO contact at AC-15</b> • at 24 V • at 250 V	3 A 3 A
<b>operational current of auxiliary contacts at DC-13</b> • at 24 V • at 125 V • at 250 V	1 A 0.2 A 0.1 A
<b>Inputs/ Outputs</b>	
<b>product function</b> • at the relay outputs switchover delayed/without delay • non-volatile	No No
<b>Electromagnetic compatibility</b>	
EMC immunity according to IEC 61812-1	EN 61000-6-2
<b>conducted interference</b> • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5	2 kV network connection / 1 kV control connection 2 kV 1 kV
<b>field-based interference according to IEC 61000-4-3</b>	10 V/m
<b>electrostatic discharge according to IEC 61000-4-2</b>	4 kV contact discharge / 8 kV air discharge
<b>Safety related data</b>	
category according to EN 954-1	none
<b>Electrical Safety</b>	
<b>protection class IP on the front according to IEC 60529</b>	IP20
<b>touch protection on the front according to IEC 60529</b>	finger-safe, for vertical contact from the front
<b>type of insulation</b>	Basic insulation
<b>Connections/ Terminals</b>	
<b>product component removable terminal for auxiliary and control circuit</b>	No
type of electrical connection for auxiliary and control circuit	screw-type terminals
<b>type of connectable conductor cross-sections</b> • solid • finely stranded with core end processing • for AWG cables solid • for AWG cables stranded	1x (0.5 ... 4.0 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> ) 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> ) 2x (20 ... 14) 2x (20 ... 14)
<b>connectable conductor cross-section</b> • solid • finely stranded with core end processing	0.5 ... 4 mm <sup>2</sup> 0.5 ... 2.5 mm <sup>2</sup>
<b>AWG number as coded connectable conductor cross section</b> • solid • stranded	18 ... 14 18 ... 14
<b>Installation/ mounting/ dimensions</b>	
<b>mounting position</b>	any
<b>fastening method</b>	clip-on
<b>height</b>	46 mm
<b>width</b>	33 mm
<b>depth</b>	73 mm
<b>required spacing</b> • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side	0 m 0 m 0 m 0 m 0 m

- for grounded parts
  - forwards
  - backwards
  - upwards
  - at the side
  - downwards
- for live parts
  - forwards
  - backwards
  - upwards
  - downwards
  - at the side

0 m  
0 m  
0 m  
0 m  
0 m  
0 m  
0 m  
0 m  
0 m  
0 m

#### Ambient conditions

installation altitude at height above sea level maximum	2 000 m
<b>ambient temperature</b>	
• during operation	-25 ... +60 °C
• during storage	-40 ... +85 °C
• during transport	-40 ... +85 °C
relative humidity during operation	15 ... 95 %

#### Approvals Certificates

##### General Product Approval



[Confirmation](#)



EG-Konf.



UL



#### Test Certificates

#### Marine / Shipping

#### other

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



ABS



DNV



PRS

[Confirmation](#)

#### other

#### Railway

#### Environment

[Miscellaneous](#)

[Special Test Certificate](#)

[Environmental Confirmations](#)

#### Further information

##### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1926-2ED11>

##### Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1926-2ED11>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)



<https://support.industry.siemens.com/cs/ww/en/ps/3RT1926-2ED11>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT1926-2ED11&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1926-2ED11&lang=en)

##### Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1926-2ED11/manual>

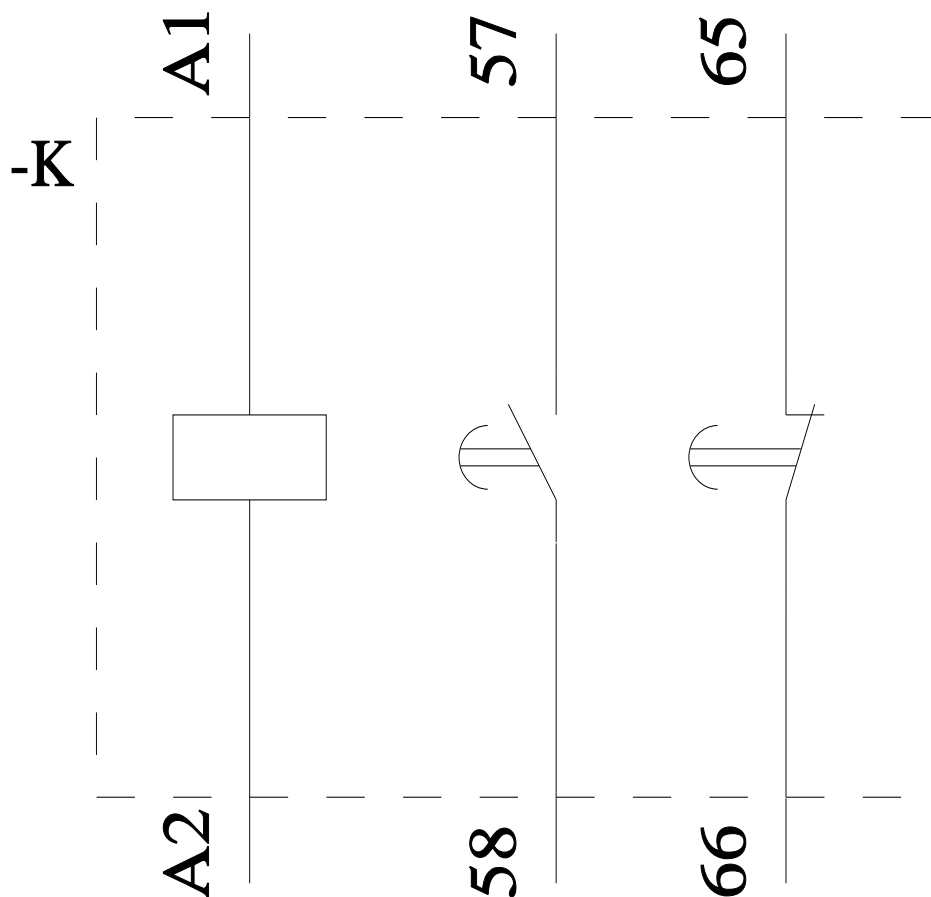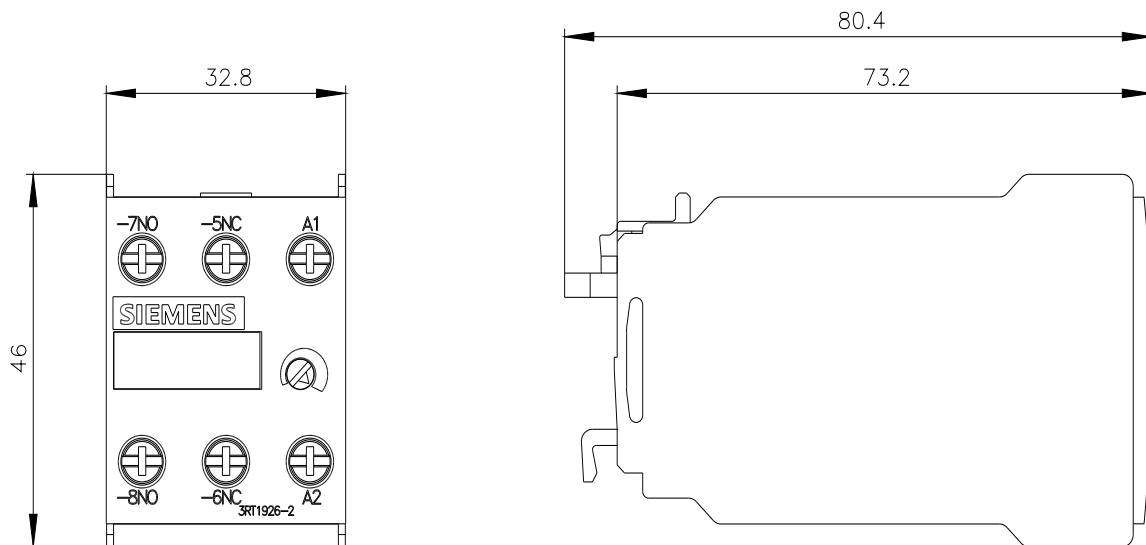



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Siemens:](#)

[3RT19262ED11](#)