

T-Coupler M12 male / 2x M8 female A-cod.

4-pol. / 2x 3-pol.

Art.No.: 7000-41201-0000000

Weight: 0.021

Country of origin: DE

Model designation: MSA02TL0-FR-FR

T-coupler

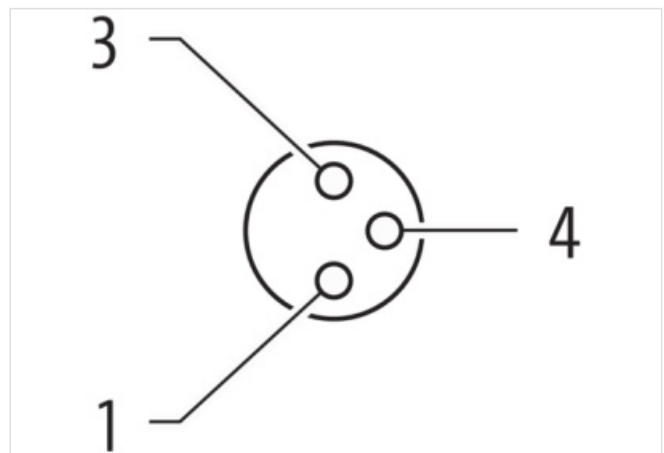
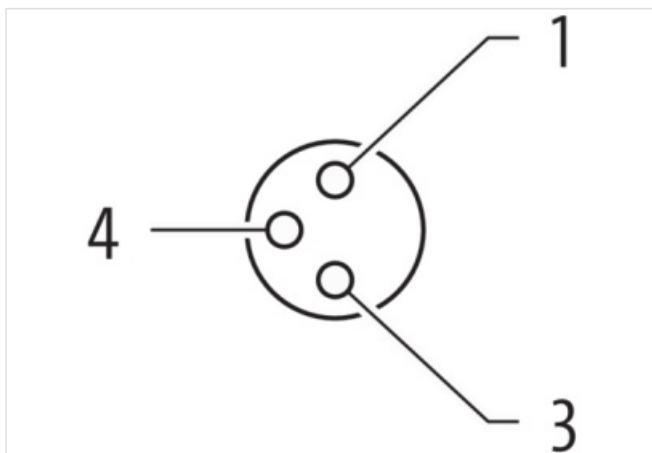
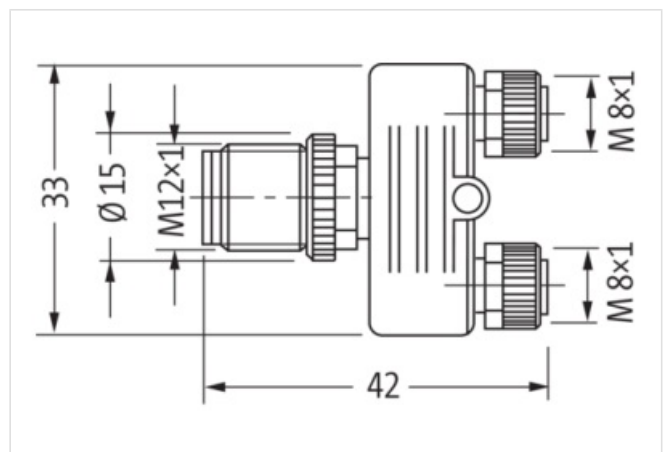
Male straight – females straight

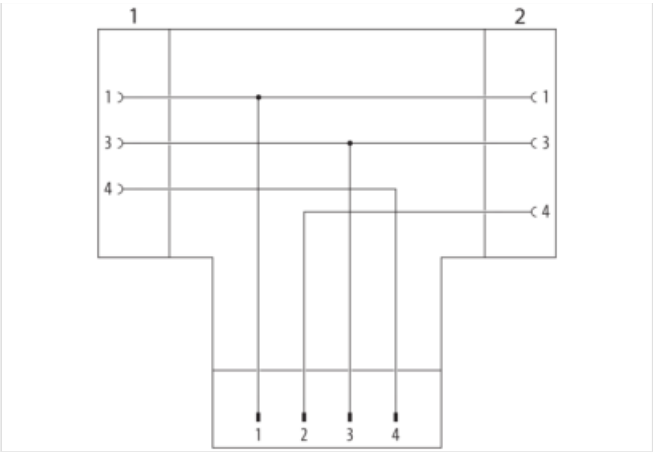
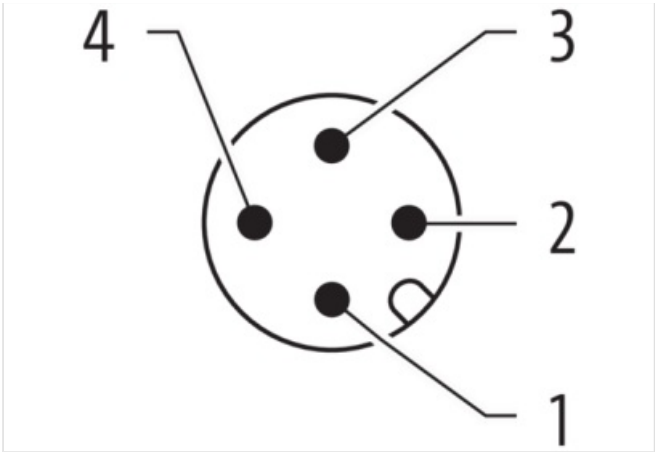
M12, 4-pole – M8, 3-pole

Distribution function (NO)

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**



Product may differ from Image



Side 1

Family construction form	M8
No. of poles	3
Coding	A
Gender	female
Mounting method	pluggable, screwed
Thread	M8 x 1
Tightening torque	0.4 Nm
Width across flats	SW9
Degree of protection (EN IEC 60529)	IP67

Side 2

Family construction form	M8
No. of poles	3
Coding	A
Gender	female
Mounting method	pluggable, screwed
Thread	M8 x 1
Tightening torque	0.4 Nm
Width across flats	SW9
Degree of protection (EN IEC 60529)	IP67

Side 3

Family construction form	M12
No. of poles	4
Coding	A
Gender	male
Mounting method	pluggable, screwed
Thread	M12 x 1
Tightening torque	0.6 Nm
Width across flats	SW13
Degree of protection (EN IEC 60529)	IP67

Commercial data

URL Webshop	https://shop.murrelektronik.com/7000-41201-0000000
-------------	---

EAN 4048879144780

Electrical data | Supply

Operating voltage AC max.	50 V
Operating voltage DC max.	60 V
Current operating per contact max.	4 A
Operating voltage AC max. (UL-listed)	30 V
Operating voltage DC max. (UL-listed)	30 V

Diagnostics

Status indication LED	no
-----------------------	----

Device protection | Electrical

Additional condition protection degree	inserted, screwed
Pollution Degree	3
Rated surge voltage	1.5 kV
Material group (IEC 60664-1)	I

Mechanical data | Material data

Material housing	PUR
Locking material	Zinc die-casting
Coating locking	Nickeled
Material gasket	FKM

Mechanical data | Mounting data

Mounting method	Schraubgewinde
-----------------	----------------

Environmental characteristics | Climatic

Operating temperature min.	-30 °C
Operating temperature max.	85 °C

Important installation notes

Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.

Conformity

Product standard	DIN EN 61076-2-101 (M12); DIN EN 61076-2-104 (M8)
------------------	---

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Murrelektronik:](#)

[7000-41201-0000000](#)