

MINIATURE RELAY

1 POLE - 1 to 2 A (For Signal Switching)

SY Series

■ FEATURES

- Very small size and light weight
 - UL, CSA recognized
 - Conforms to FCC rules and regulations part 68
 - Dielectric strength 1000 VAC between coil and contacts
 - Surge strength 1500 V
 - High sensitivity
 - Wide ambient temperature range (-30°C to +90°C)
 - Wide operating range
 - DIL pitch terminals
 - Plastic sealed type
 - RoHS compliant.
- Please see page 7 for more information



■ PARTNUMBER INFORMATION

[Example] $\frac{\text{SY}}{\text{(a)}} - \frac{12}{\text{(b)}} \frac{\text{W}}{\text{(c)}} - \frac{\text{K}}{\text{(d)}} - \frac{\text{UL}}{\text{(e)}}$

| | | | |
|-----|--------------------|-----------|--|
| (a) | Relay type | SY | : SY-Series |
| (b) | Coil rated voltage | 12 | : 1.5.....24 VDC Coil rating table at page 3 |
| (c) | Contact style | Nil W | : Single type : Bifurcated type |
| (d) | Enclosure | K | : Plastic sealed type |
| (e) | Approvals | Nil UL | : No UL/CSA marking on relay : UL, CSA marking on relay |

Note: For movable and stationary contact with gold overlay type, add suffix "-OH"

■ SPECIFICATION

| Item | | | Single type | Bifurcated type |
|--------------|--------------------------------|------------------|--|------------------------|
| | | | SY - () - K | SY - () W - K |
| Contact Data | Configuration | | 1 form C (SPDT) | |
| | Construction | | Single (cross bar) | Bifurcated (cross bar) |
| | Material | | Gold overlay silver palladium | |
| | Resistance (initial) | | Max. 100 mΩ at 1 A, 6 VDC | |
| | Contact rating (resistive) | | 0.5A, 120VAC or 1A, 24VDC | |
| | Max. carrying current | | 2A | |
| | Max. switching voltage | | 120VAC / 60VDC | |
| | Max. switching power | | 60AV / 24W | |
| | Max. switching current | | 1A | |
| | Min. switching load * | | 1 mA, 1VDC | 0.1 mA, 100mVDC |
| | Capacitance (at 10 MHz) | | Approximately 1.4 pF (between open contacts) Approximately 5.0 pF (between coil and contacts) | |
| Life | Mechanical | | Min. 5 x 10 ⁶ operations | |
| | Electrical (at contact rating) | | Min. 100 x 10 ³ operations | |
| Coil Data | Rated power | | 150 to 175 mW | |
| | Operate power | | 75 to 86 mW | |
| | Operating temperature range | | -30 °C to +90 °C (no frost) (18V coil: +85 °C, 24V coil: +80 °C) | |
| Timing Data | Operate (at nominal voltage) | | Max. 5 ms | |
| | Release (at nominal voltage) | | Max. 2 ms | |
| Insulation | Resistance (initial) | | Min. 1,000MΩ at 500VDC | Min. 1,000MΩ at 250VDC |
| | Dielectric strength | Open contacts | 400VAC, 1min | 300VAC, 1min |
| | | Contacts to coil | 1,000VAC, 1min | |
| | Surge strength | Coil to contacts | 1,500V/ 10 x 160μs standard wave | |
| Other | Vibration resistance | Misoperation | 10 to 55Hz double amplitude 1.5mm | |
| | | Endurance | 10 to 55Hz double amplitude 1.5mm | |
| | Shock | Misoperation | 300m/s ² (11 ± 1ms) | |
| | | Endurance | 1,000m/s ² (6 ± 1ms) | |
| | Weight | | Approximately 1.7 g | |

* Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

■ COIL RATING

| Coil Code | Rated Coil Voltage (VDC) | Coil Resistance +/- 10% (Ohm) | Must Operate Voltage (VDC) * | Must Release Voltage (VDC) * | Rated Power (mW) |
|-----------|--------------------------|-------------------------------|------------------------------|------------------------------|------------------|
| 1.5 | 1.5 | 15 | 1.05 | 0.08 | 150 |
| 3 | 3 | 60 | 2.1 | 0.15 | |
| 4.5 | 4.5 | 135 | 3.2 | 0.23 | |
| 5 | 5 | 167 | 3.5 | 0.25 | |
| 6 | 6 | 240 | 4.2 | 0.3 | |
| 9 | 9 | 540 | 6.3 | 0.45 | |
| 12 | 12 | 960 | 8.4 | 0.6 | 170 |
| 18 | 18 | 1,940 | 12.6 | 0.9 | |
| 24 | 24 | 3,290 | 16.8 | 1.2 | |








Note: All values in the table are valid for 20°C and zero contact current.









* Specified operate values are valid for pulse wave voltage.

■ SAFETY STANDARDS

| Type | Compliance | Contact rating |
|------|--------------------------|---|
| UL | UL 478 UL 508 | Flammability: UL 94-V0 (plastics) |
| | E 45026 | 0.5A, 120VAC (resistive) 1A, 30VDC (resistive) 0.15A, 48VDC (resistive) |
| CSA | C22.2 No. 14 LR 35579 | |


■ CHARACTERISTIC DATA

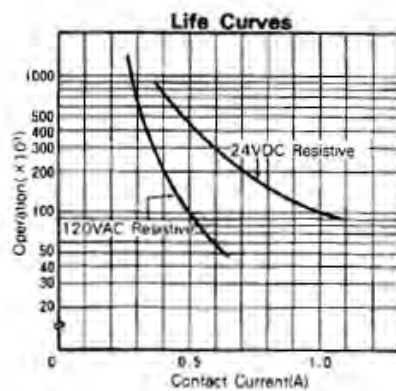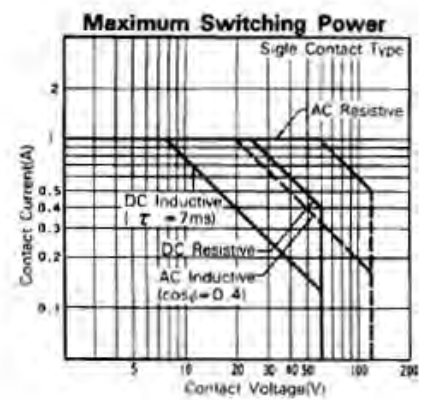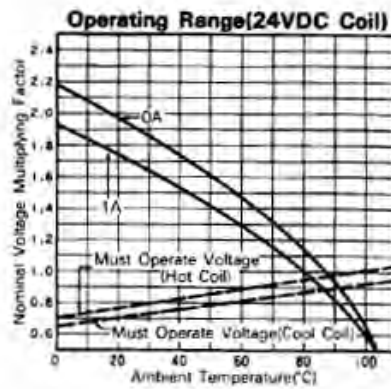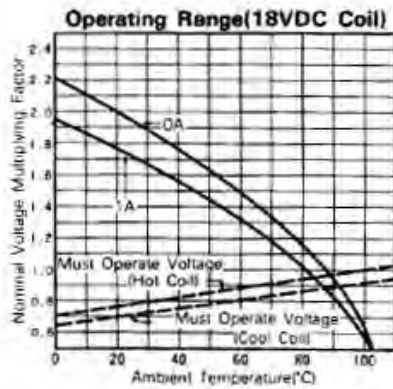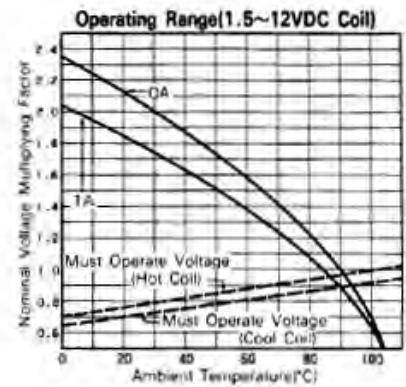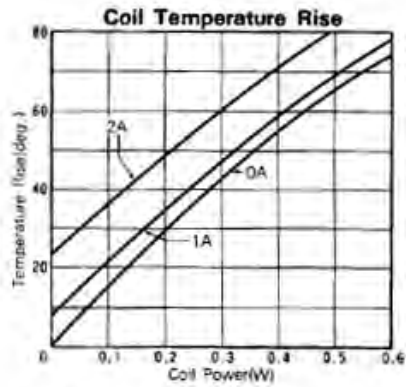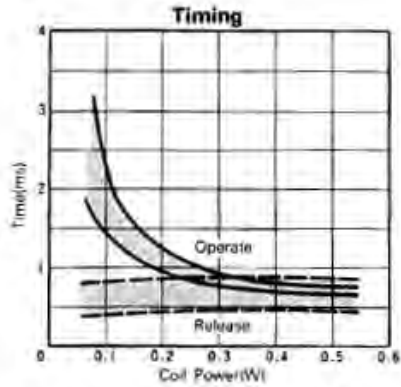

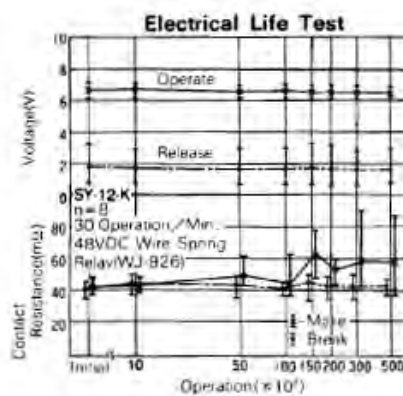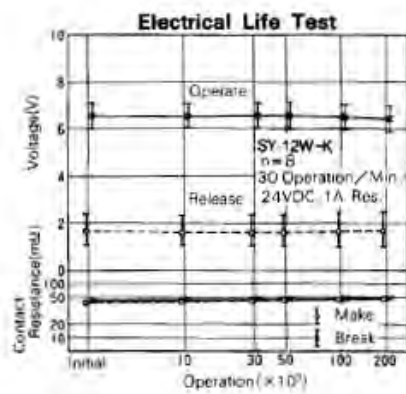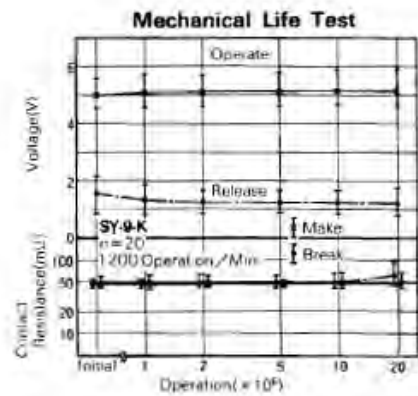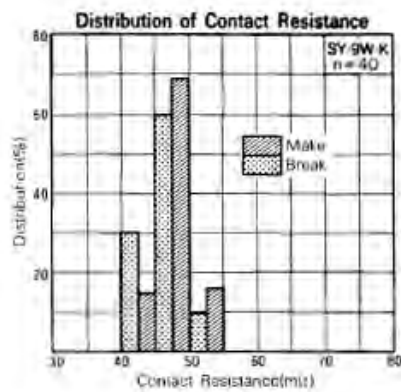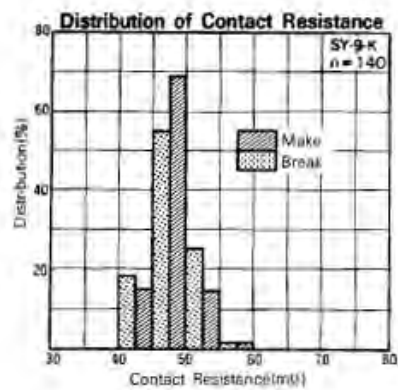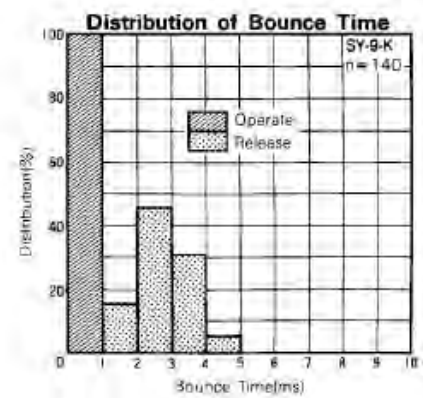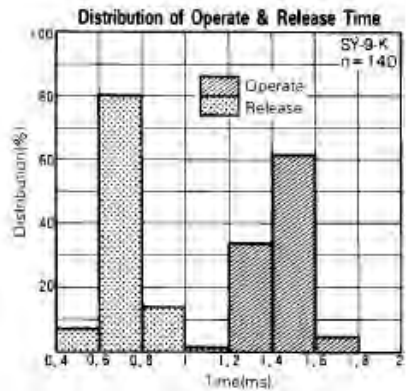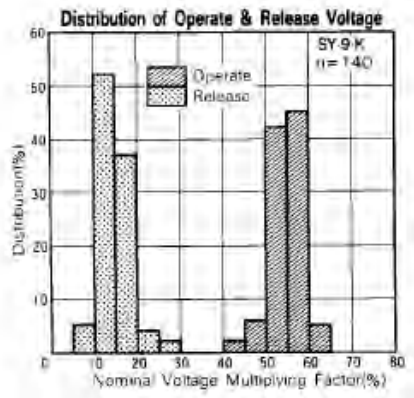


■ DIMENSIONS


● Dimensions

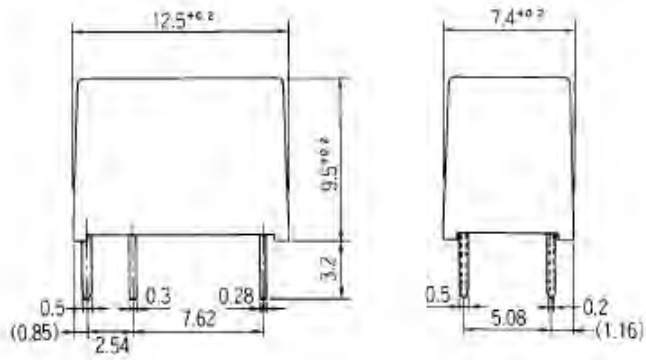

● Schematics (BOTTOM VIEW)



● PC board mounting hole layout (BOTTOM VIEW)

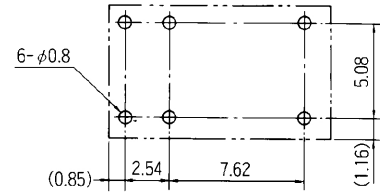

Unit: mm

RoHS Compliance and Lead Free Information

1. General Information

- All signal and power relays produced by Fujitsu Components are compliant with RoHS directive 2002/95EC including amendments.
- Cadmium as used in electrical contacts is exempted from the RoHS directives on October 21st, 2005. (Amendment to Directive 2002/95/EC)
- All of our signal and power relays are lead-free. Please refer to Lead-Free Status Info for older date codes at: <http://www.fujitsu.com/us/downloads/MICRO/fcai/relays/lead-free-letter.pdf>
- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.

2. Recommended Lead Free Solder Profile

- **Recommended solder Sn-3.0Ag-0.5Cu.**

Flow Solder condition:

Pre-heating: maximum 120°C
Soldering: dip within 5 sec. at
260°C solder bath

Solder by Soldering Iron:

Soldering Iron
Temperature: maximum 360°C
Duration: maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

Fujitsu Components International Headquarter Offices

| | |
|---|--|
| Japan Fujitsu Component Limited Gotanda-Chuo Building 3-5, Higashigotanda 2-chome, Shinagawa-ku Tokyo 141, Japan Tel: (81-3) 5449-7010 Fax: (81-3) 5449-2626 Email: promothq@ft.ed.fujitsu.com Web: www.fcl.fujitsu.com | Europe Fujitsu Components Europe B.V. Diamantlaan 25 2132 WV Hoofddorp Netherlands Tel: (31-23) 5560910 Fax: (31-23) 5560950 Email: info@fceu.fujitsu.com Web: emea.fujitsu.com/components/ |
| North and South America Fujitsu Components America, Inc. 250 E. Caribbean Drive Sunnyvale, CA 94089 U.S.A. Tel: (1-408) 745-4900 Fax: (1-408) 745-4970 Email: components@us.fujitsu.com Web: http://us.fujitsu.com/components | Asia Pacific Fujitsu Components Asia Ltd. 102E Pasir Panjang Road #01-01 Citilink Warehouse Complex Singapore 118529 Tel: (65) 6375-8560 Fax: (65) 6273-3021 Email: fcal@fcal.fujitsu.com Web: http://www.fujitsu.com/sg/services/micro/components/ |

©2012 Fujitsu Components Europe B.V. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

The contents, data and information in this datasheet are provided by Fujitsu Component Ltd. as a service only to its user and only for general information purposes.

The use of the contents, data and information provided in this datasheet is at the users' own risk.

Fujitsu has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

Fujitsu Components Europe B.V. and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do Fujitsu Components Europe B.V. and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability for any representation or warrant of any kind, express or implied, including warranties of any kind for merchantability or fitness for particular use, with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. July 30, 2012

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Fujitsu:

[SY-1.5W-K](#) [SY-9-K](#) [SY-12-K](#) [SY-24-K](#) [SY-6W-K](#) [SY-1.5-K](#) [SY-4.5W-K](#) [SY-4.5-K](#) [SY-3W-K](#) [SY-18W-K](#) [SY-6-K](#)
[SY-18-K](#) [SY-12W-K](#) [SY-5W-K](#) [SY-5-K](#) [SY-9W-K](#) [SY-3-K](#) [SY-24W-K](#)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

FCL Components:

[SY-4.5-K-UL](#) [SY-4.5W-K-UL](#) [SY-9W-K-UL](#) [SY-3-K-UL](#) [SY-3W-K-UL](#) [SY-1.5-K-UL](#) [SY-12-K-UL](#) [SY-24W-K-UL](#) [SY-6-K-UL](#) [SY-18-K-UL](#) [SY-24-K-UL](#) [SY-6W-K-UL](#) [SY-1.5W-K-UL](#) [SY-12W0H-K-UL](#) [SY-9-K-UL](#) [SY-18W-K-UL](#) [SY-5-K-UL](#) [SY-5W-K-UL](#)