

# **GLOBAL CONNECTIVITY SOLUTIONS**

N Female Bulkhead to TNC Male Right Angle Cable Assembly using RG58 Coax, 1.5 FT

# LCCA30692-FT1.5

#### Configuration

- Connector 1: N Female Bulkhead
- Connector 2: TNC Male Right Angle
- Cable Type: RG58


#### Features

- 50 Ohm RF (Radio Frequency) Transmission
- · RG58 stranded center conductor enhances flexibility
- · Same day shipping available

## **Applications**

- RFID systems up to 1 GHz
- · General Purpose Test and Measurements

- · Right angle body style accommodates tight fit applications
- Bulkhead design is ideal for panel mount applications
- · Heat shrink strain relief for a highly durable RF cable assembly
- Wireless Infrastructure
- · GPS Timing and telematics

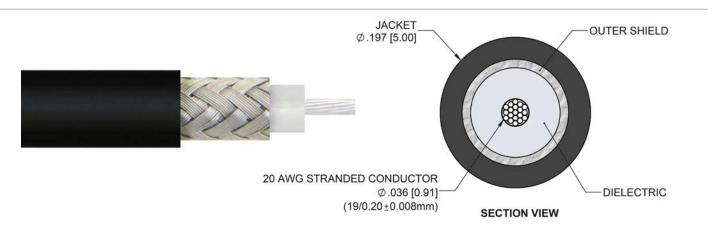

#### Description

1

L-com's LCCA30692-FT1.5 is a N female bulkhead to TNC male right angle cable assembly using RG58 coax, 1.5 FT and ships same-day. The RG58 coax of this N cable uses the PTFE dielectric with a VoP of 69.5%. These flexible RF cable assemblies are ideal for applications where flexure is required. Our L-com N to TNC cable assembly has a female to male gender configuration with flexible RG58 series coax and operates to 1 GHz. The shielding of this N cable is comprised of tinned copper braid. L-com's RF cable assembly with N bulkhead interface enables system designers to have external connections on their product enclosures or to be used for other rack mount and panel mount applications. This right angle TNC cable interface on the RG58 coax allows for easier connections in tight spaces.

Custom versions of this N female to N male cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA30692-FT1.5 L-com N Female Bulkhead to TNC Male Right Angle Cable Assembly using RG58 Coax, 1.5 FT data sheet PDF includes details of the RF product specifications. CAD drawing(s) and dimensions below.

# **Electrical Specifications**

| Description | Minimum | Typical | Maximum | Units |
|-------------|---------|---------|---------|-------|
|             |         |         |         |       |

LCCA30692-FT1.5 REV 1 | © 2020 Infinite Electronics, Inc. L-com is a registered trademark of Infinite Electronics, Inc.







N Female Bulkhead to TNC Male Right Angle Cable Assembly using RG58 Coax, 1.5 FT



# LCCA30692-FT1.5

| Frequency Range DC      |              | 1,000 MHz    |
|-------------------------|--------------|--------------|
| VSWR                    |              | 1.4:1        |
| Velocity of Propagation | 69.5         | %            |
| Capacitance             | 16.1 [52.82] | pF/ft [pF/m] |

## **Specifications by Frequency**

| Description           | F1   | F2   | F3   | F4   | F5    | Units |  |
|-----------------------|------|------|------|------|-------|-------|--|
| Frequency             | 50   | 100  | 200  | 400  | 1,000 | MHz   |  |
| Insertion Loss (Typ.) | 0.35 | 0.37 | 0.41 | 0.47 | 0.62  | dB    |  |
|                       |      |      |      |      |       |       |  |

#### **Electrical Specification Notes:**

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 per straight connector and 0.2 dB per right angle connector.

## **Mechanical Specifications**

Cable Assembly Length

#### Cable

Cable Type Impedance Inner Conductor Type Inner Conductor Material and Plating Dielectric Type Number of Shields Shield Layer 1 Jacket Material Jacket Diameter

Repeated Minimum Bend Radius

18 in [457.2 mm]

RG58 50 Ohms Stranded Copper, Silver PTFE 1 Tinned Copper Braid PVC, Black 0.197 in [5 mm]

2 in [50.8 mm]



N Female Bulkhead to TNC Male Right Angle Cable Assembly using RG58 Coax, 1.5 FT



# LCCA30692-FT1.5

# Connectors

| Description                          | Connector 1       | Connector 2          |
|--------------------------------------|-------------------|----------------------|
| Туре                                 | N Female Bulkhead | TNC Male Right Angle |
| Impedance                            | 50 Ohms           | 50 Ohms              |
| Contact Material and Plating         | Brass, Gold       | Brass, Gold          |
| Dielectric Type                      | PTFE              | Acetal               |
| Outer Conductor Material and Plating | Brass, Nickel     |                      |
| Body Material and Plating            | Brass, Nickel     | Brass, Nickel        |
| Coupling Nut Material and Plating    |                   | Brass, Nickel        |

## **Environmental Specifications**

Temperature Operating Range

-20 to +80 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data Notes:




N Female Bulkhead to TNC Male Right Angle Cable Assembly using RG58 Coax, 1.5 FT

# LCCA30692-FT1.5

## How to Order


Part Number Configuration:

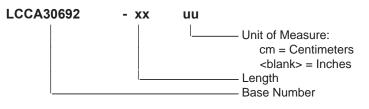

Example: LCCA30692-12 = 12 inches long cable LCCA30692-100cm = 100 cm long cable

N Female Bulkhead to TNC Male Right Angle Cable Assembly using RG58 Coax, 1.5 FT from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to instock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.ontained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not marranty regarding the suitability of the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

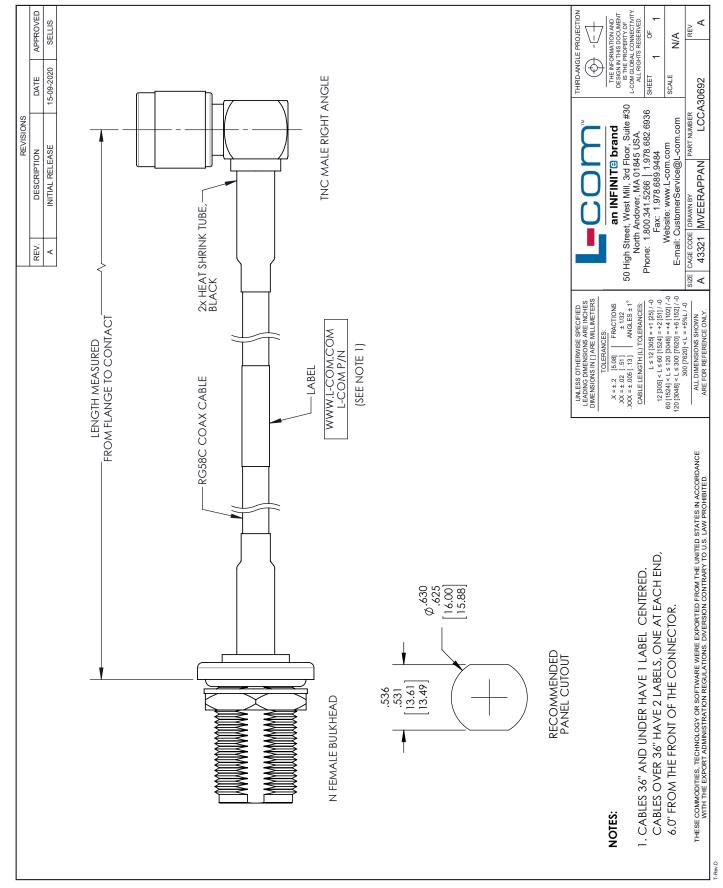

# L-com CAD Drawing

USA & Canada (800) 341-5266 | International (978) 682-6936 | I-com.com

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

infinite Electronics:

LCCA30692-FT1.5