



Pushing Performance  
Since 1945

# DIN-Signal high curr.FS40A for M-flat



Image is for illustration purposes only. Please refer to product description.

Part number	09 03 000 6225
Specification	DIN-Signal high curr.FS40A for M-flat
HARTING eCatalogue	<a href="https://b2b.harting.com/09030006225">https://b2b.harting.com/09030006225</a>

## Identification

Category	Contacts
Series	DIN 41612 har-modular®
Type of contact	PCB solder contact
Description of the contact	Straight
Contacts for	DIN 41612 Type M-flat har-modular® M-flat module, female, straight

## Version

Gender	Female contact for female connectors
Connection type	Motherboard to daughtercard Mezzanine PCB to cable
Manufacturing process	Turned contacts

## Technical characteristics

Rated current	≤40 A
Insertion force	≤10 N
Withdrawal force	≥1.6 N
Performance level	1
Mating cycles	≥500

## Material properties

Material (contacts)	Copper alloy
---------------------	--------------



**Pushing Performance**  
Since 1945

## Material properties

Surface (contacts)	Noble metal over Ni Mating side
RoHS	compliant with exemption
RoHS exemptions	6(c): Copper alloy containing up to 4 % lead by weight
ELV status	compliant with exemption
China RoHS	50
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Yes
REACH SVHC substances	Lead
ECHA SCIP number	339476a1-86ba-49e9-ab4b-cd336420d72a
California Proposition 65 substances	Yes
California Proposition 65 substances	Lead Nickel

## Specifications and approvals

Specifications	DIN 41626
----------------	-----------


## Commercial data

Packaging size	100
Net weight	1.143 g
Country of origin	Hungary
European customs tariff number	85366990
GTIN	5713140004115
ETIM	EC000796
eCl@ss	27440204 Contact for industrial connectors

### Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

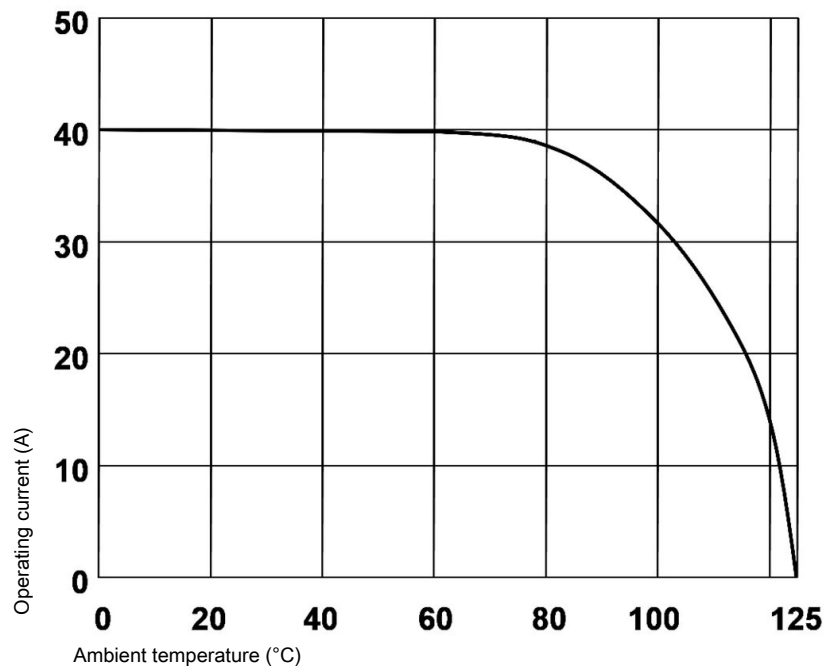

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[HARTING:](#)

[09030006225](#)