



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AMPHENOL CABLES ON DEMAND. ANY REPRODUCTION OR DISCLOSURE TO THIRD PARTIES, IN PART OR WHOLE, WITHOUT THE EXPRESS WRITTEN PERMISSION OF AMPHENOL CABLES ON DEMAND IS PROHIBITED.

REV.		REVISIONS	
REV.	DESCRIPTION	DATE	APPROVED
A	NEW RELEASE	3/DEC/2013	
A1	Added ACD PIN to the table.	24/Oct/2019	

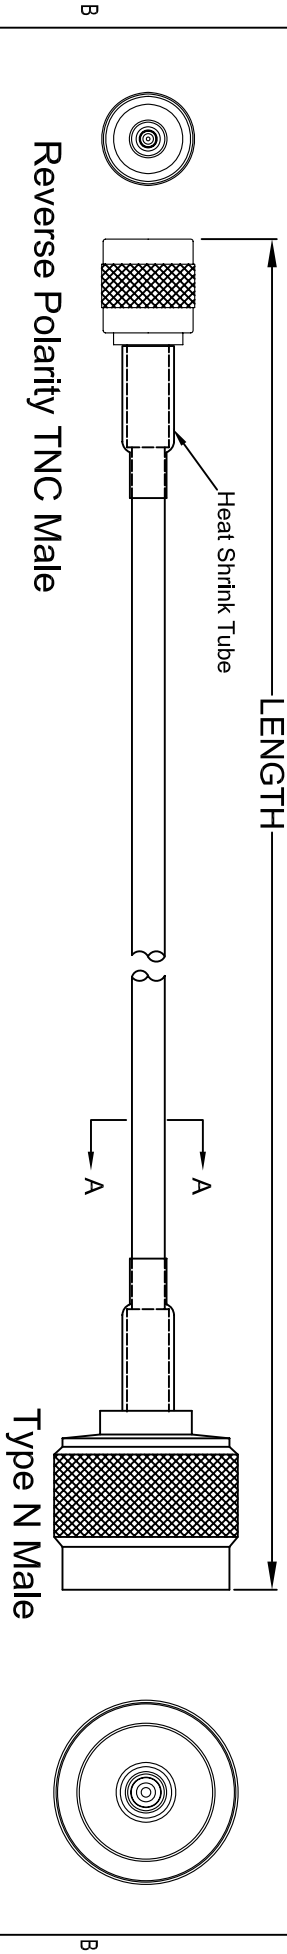

LENGTH & P/N Table

LENGTH	CUSTOMER P/N
3FT(914±30mm)	CO-058TNCRPTN-003
6FT(1829±40mm)	CO-058TNCRPTN-006
10FT(3048±40mm)	CO-058TNCRPTN-010
15FT(4572±50mm)	CO-058TNCRPTN-015
25FT(7620±100mm)	CO-058TNCRPTN-025



- NOTES:
- 1.CABLE:120AWG(19/0.18±0.008mm)*1C+AL/MYLAR +BRAID(16*8/0.12±0.008mm)1TINNED COPPER INSULATION:PE OD= 2.95±0.10mm COLOR:TRANSPARENT JACKET:HALF MATTE PVC LOW TOXIC; OD=Ø5.0±0.15mm COLOR:UL813 BLACK
 - 2.CONNECTOR:Reverse Polarity TNC Male MARKING:RG58C/U COAXIAL CABLE 50 OHM RoHS N PLUG CRIMP FOR RG58U
 - 3.OPEN/SHORT MISS WIRE TEST 100%
 - 4.CONDUCTOR RESISTANCE ≤ 36.7Ω/km
 - 5.INSULATION RESISTANCE ≥ 2MΩ DC300V 0.01Sec
- ALL MATERIALS SHOULD ACCORD WITH RoHS STANDARD.

PIN OUT:

CENTER	CENTER
SHELL	SHELL



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		EAR NO.		Amphenol Cables on Demand 20 VALLEY ST. ENDICOTT, NY 13760	
DECIMALS		APPROVALS		DATE	
X		LF		3/DEC/2013	
XX		BA		3/DEC/2013	
XXX		RESP ENG			
THIRD ANGLE PROJECTION		MFG ENG			
SIZE DWG. NO.		A		CO-058TNCRPTN-XXX	
REV.		A1			

NOTES: UNLESS OTHERWISE SPECIFIED

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[CO-058TNCRPTN-003](#) [CO-058TNCRPTN-006](#) [CO-058TNCRPTN-010](#) [CO-058TNCRPTN-015](#) [CO-058TNCRPTN-025](#)