
ROHS COMPLIANT

PRODUCT DATA DRAWING

REVISION HISTORY			
REV DESCRIPTION		DATE	APPROVED
-	NRN 44390	11/19	DEF

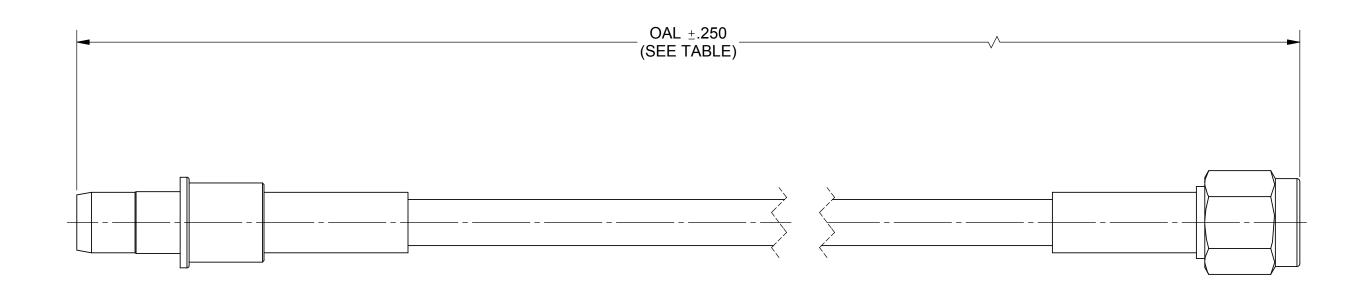

MATERIAL:

CONNECTORS: BMA (SIZE 8) D38999 PIN CONTACT (SF9421-6001)

SMA PLUG (SF2902-6005)

CABLE: T-FLEX 402 SHRINK TUBING: M23053/5

PERFORMANCE:

IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 18.0 GHz

				SV P/N	OAL
				7093-0184	12.000
				7093-0185	24.000
MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES:	UNLESS OTHERWISE SPECIFIE	ED S	Amphenol

	SEE NOTES
FINISH:	SEE NOTES
SURFACE AREA:	N/A
PR	OPRIETARY
IS THE SOLE PROP	CONTAINED IN THIS DRAWING PERTY OF SV MICROWAVE, INC. ON IN PART OR AS A WHOLE

PRACTIONAL: ±1/64 ANGULAR: X* ±1/10 DECIMAL: X ±.030 .XX ±.010 .XXX ±.005 INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	1) ALL DIMENSIONS ARE IN INCHES [MILLIMETE 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SUFFACE ROUGHNESS 63. MIL-STD-10. 6) DIA.'S ON COMMON CENTERS TO BE CONCE WITHIN .005 T.I.R. 7) REMOVE ALL BURRS.
THIRD ANGLE PROJECTION	DRAWN: SJ 11/

RD ANGLE PROJECTION	DRAWN:	SJ 11/11/19
	CHECKED:	DEF 11/11/19
\\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\	APPROVED:	DEF 11/11/19

	MICROWAVE www.svmicrowave.com	
_		

TITLE:
BMA (SIZE 8) D38999 PIN CONTACT
TO SMA MALE FOR Ø.141 T-FLEX
402 CABLE ASSEMBLY

SIZE B	DWG. NO.	7093-018	7093-0184-0185		
SCALE: 3:1			SHEET 1 OF 1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>Amphenol</u>: 7093-0184