

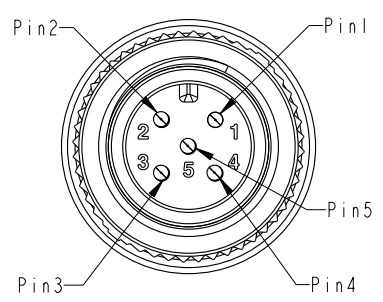


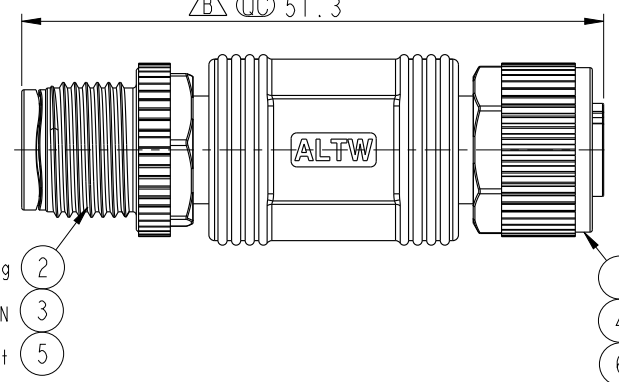
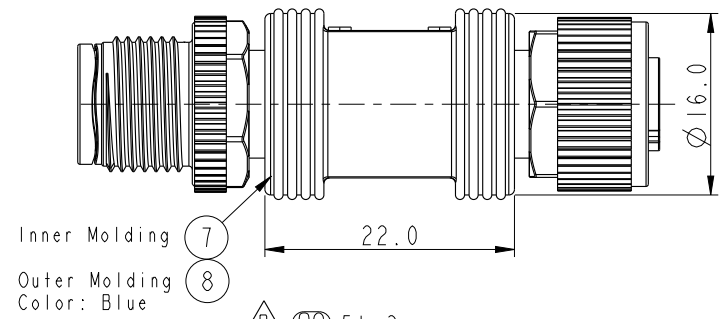


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2017-04-11	Frank Deng	Rev.01 To Rev.A
B	LE31760225	2017-05-27	Frank Deng	Change Part

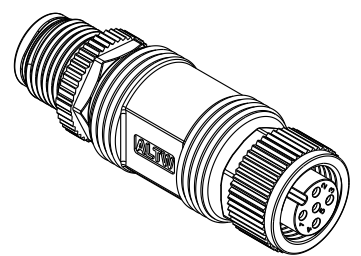

Pin Assignments
Front View
Conn1.

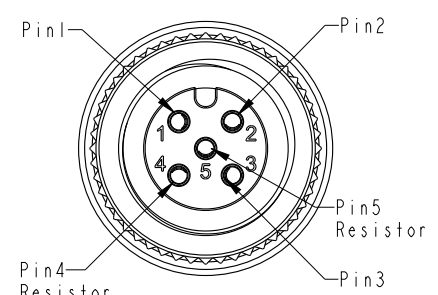

Pin Assignments
Front View
Conn2.

Blue 藍 (22AWG)	5	5
White 白 (22AWG)	4	4
Black 黑 (22AWG)	3	3
Red 紅 (22AWG)	2	2
Green 綠 (22AWG)	1	1
Wire Color	Conn.1	Conn.2

Resistor

- Note:
- * $\varnothing$ Important Dimension.
 - * Waterproof Rate: IP68
 - * Connector: Black, PU
 - * Pins: Copper Alloy, Gold Plated
 - * Screw Nut: Nylon + G/F, Black.
 - * Resistor: 1/4W, 120ohm $\pm$ 5% Resistance, Molded Inside The Connector.
 - * Wire Harness: UL1007/TR64 22AWG, OD=0.76mm

UNIT:mm		TOLERANCE		TITLE		ITEM NO		DRAWN BY		DATE	
± 0.5 mm				NMEA2000 MICRO-C INLINE RESISTOR		HPC-000505-0MF-IS001		Frank Deng		2017-05-27	
				SCALE 3:2		DWG NO HPC-000505-0MF-IS001		CHECKED BY Fisher Wang		DATE 2017-05-27	
				REV. B		CUSTOMER ALTW		APPROVED BY Kevin Hu		DATE 2017-05-27	
				SIZE A4							
				SHEET 1 OF 1							
				WC-REV. A.3							
				$\varnothing$ Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[HPC-000505-0MF-IS001](#)