

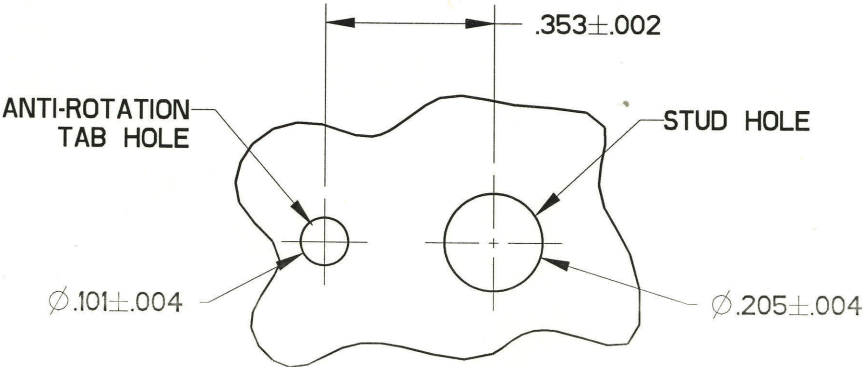
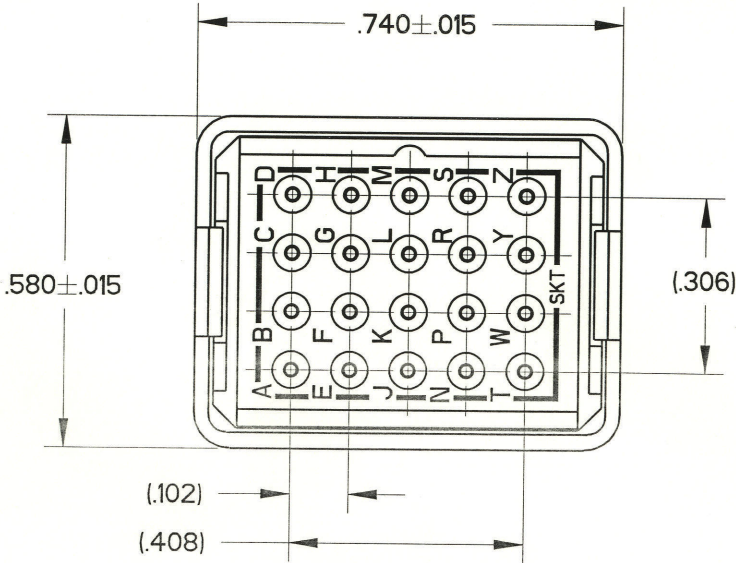
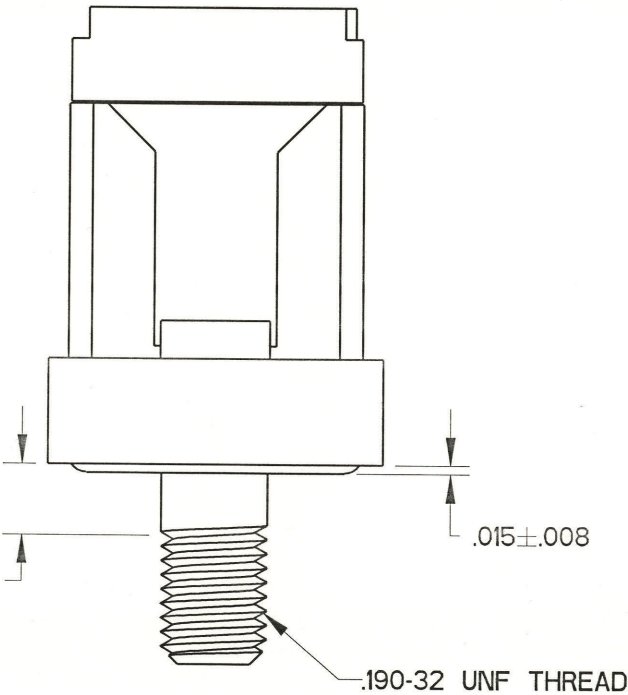


REV	ECN	APP'D
K	5910	9/26/06

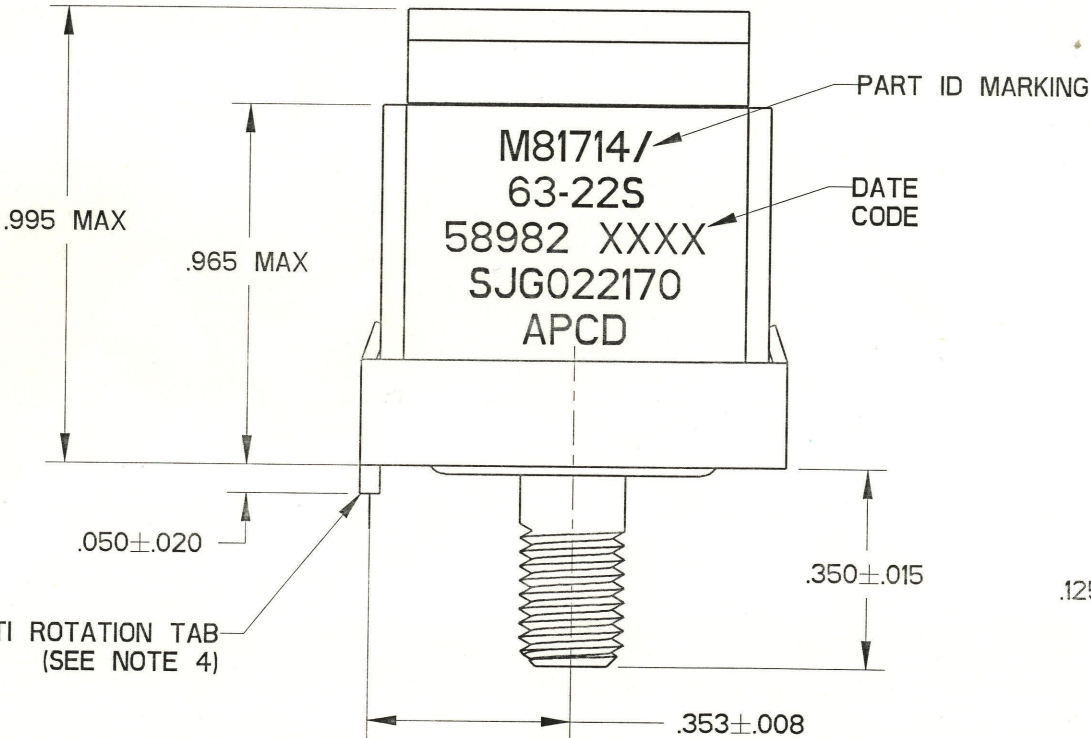

MOUNTING HOLE CONFIGURATION

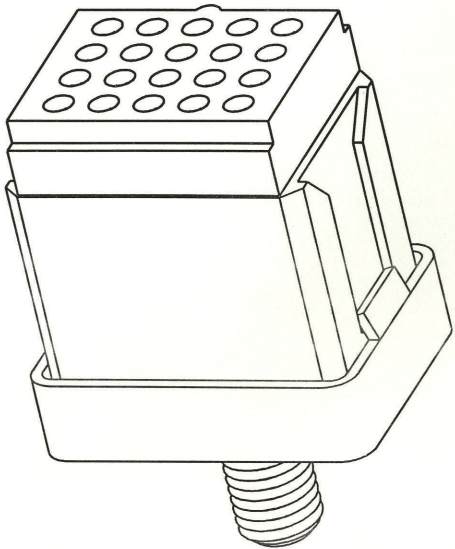

- NOTES:
- MATERIALS:
BODY: POLYETHERIMIDE PER ASTM-D5205.
GROMMET: SILICONE BLEND ELASTOMER PER A-A-59588.
CONTACT RETAINERS: STAINLESS STEEL.
SHELL/STUD: COPPER ALLOY, GOLD PLATE PER SAE-AMS-2422
MOUNTING HARDWARE: (SUPPLIED SEPARATELY)
STEEL, CADMIUM FINISH PER SAE-AMS-QQ-P-416
 - PERFORMANCE SPECIFICATIONS:
MEETS ALL PERFORMANCE REQUIREMENTS OF MIL-T-81714.
 - MODULE ACCEPTS M39029/22-191 CONTACTS AND MS27488-22-1 SEALING PLUGS. SEE TABLE
 - ANTI ROTATION TAB SHALL ENTER INTO MOUNTING HOLE.

APCD P/N	SUPPLIED		MARKING
	SKTS	PLUGS	APCD PART NO.
SJG022170	21	2	SJG022170
SJG022171	-	-	

HARDWARE / SOCKET CONTACT BOM		
APCD P/N	DESCRIPTION	QTY.
200001201	FLAT WASHER, #10	1
200008251	HEX NUT 10-32 CRS SJG	1
200008301	LOCK WASHER, INT TOOTH, #10	1
CNS070900	M39029/22-191 CONTACT SZ 20/20	13
CNA032404	SEALING PLUG, SZ 22	2

DIMENSIONS	TOLERANCES	PROJECTION	Amphenol Pcd SPECIFICATION DRAWING		TITLE SJG, SIZE 22 GROUNDING MODULE GOLD FINISH		
ANSI Y14.5M UNITS: INCHES Pro/E FILE	.XX ±0.01 .XXX ±0.005 ANGLES ±2.0°		DRWN R. SWAINE 9/26/06	ENGR R. Swaine 9/26/06	SIZE B	DWG NO. SJG022170	REV K
ORIGINAL	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD INC., PEABODY, MA		APPD J. Talbot 9/26/06		CODE: 58982	SCALE: 2:1	SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[SJG022171](#)