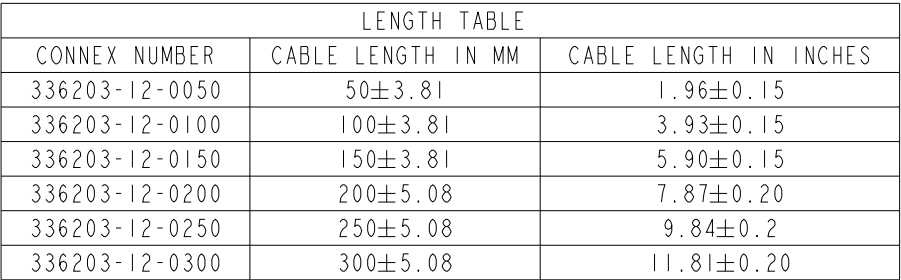NOTES:

1. PACKAGE CABLE ASSEMBLY IN BAG. TAG IN BAG WITH "AMPHENOL CONNEX, 336203-12-XXX AND DATE CODE".

2. CABLE ASSEMBLY TO BE 100% TESTED FOR CONTINUITY, SHORTS AND OPEN.

336203-12-XXXX		REVISIONS			
DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR
THIRD ANGLE PROJ. ⊕ ◁	A	RELEASE TO MFG	08-Feb-11	--	RAK

SCALE 1.000

XXXX MM LENGTH

② D'FLAT

③

①

0.75" MAX
[19.05]MM MAX

HEX NUT

LOCK WASHER

GASKET

LENGTH TABLE		
CONNEX NUMBER	CABLE LENGTH IN MM	CABLE LENGTH IN INCHES
336203-12-0050	50±3.81	1.96±0.15
336203-12-0100	100±3.81	3.93±0.15
336203-12-0150	150±3.81	5.90±0.15
336203-12-0200	200±5.08	7.87±0.20
336203-12-0250	250±5.08	9.84±0.2
336203-12-0300	300±5.08	11.81±0.20

ORIENT AMC INTERFACE
WITH RESPECT TO TNC BLKHD 'D FLAT'
AS SHOWN WITH IN ±10°

* ADDITIONAL LENGTHS CAN BE PROVIDED
BY CHANGING XX.XX TO DESIRED LEGNTH IN MM
CONTACT CONNEX MARKETING FOR QUOTE

DESIGN REQUIREMENTS:

☐ FREQUENCY_____ TO _____ GHz   ☒ CONTINUITY

☐ VSWR _____ : MAX   ☒ HI-POT : 250 VRMS

☐ INS. LOSS _____ dB MAX   ☐ OTHER

PART NUMBER	QTY	ITEM	DESCRIPTION	FINISH
009-954-458	A/R	3	HEAT SHRINK TUBING	
122526	1	2	TNC BLKHD CRIMP JACK	
100901-02	1	1	MICRO COAX PLUG TERMINATED TO 1.13MM CABLE	

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:
2 PLACE DECIMAL   3 PLACE DECIMAL   ANGLES
±.015 (0,381 mm)   ±.005 (0,127 mm)   ± 1°

MATERIAL

REFERENCE

TASK - 561

DRAWN	DATE
ABHAYA KISHORE	08-Feb-11
ENGINEER	DATE
ABHAYA KISHORE	08-Feb-11
APPROVED	DATE

CAD FILE
Root Folder/Cable_Assy/ 336203-12-XXXX

TITLE
TNC STR BHD CRIMP JACK
TO MICRO COAX PLUG
USING 1.13MM CABLE,
XXXX MM" LENGTH

Amphenol
Connex

SCALE: 2.5:1   SHEET 1 OF 1

DWG SIZE
B

DRAWING NO.
336203-12-XXXX

REV
A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol](#):
  [336203-12-0050](#) [336203-12-0100](#) [336203-12-0150](#) [336203-12-0200](#) [336203-12-0250](#) [336203-12-0300](#)