NOTES:

3. MECHANICAL:

A. DURABILITY: SMA JACK SIDE : 500 CYCLES MIN.

P-SMP JACK SIDE: 100 CYCLES MIN WHEN MATED WITH FULL DETENT PLUG 100 CYCLES MIN WHEN MATED WITH LIMITED DETENT PLUG

1000 CYCLES MIN WHEN MATED WITH A SMOOTH BORE PLUG

THIRD ANGLE PROJ.  $\oplus$ 

REV

B. TEMPERATURE RANGE: -55°C TO +155°C

2. ELECTRICAL: A. IMPEDANCE: 50 OHM, NOMINAL

CONTACT PIN - BERYLLIUM COPPER, GOLD PLATING

SMA BODY - STAINLESS STEEL, PASSIVATED P-SMP BODY - BERYLLIUM COPPER, GOLD PLATING

B. FREQUENCY RANGE: DC - 10 GHz
C. RETURN LOSS(VSWR): 33 dB MIN.@ DC-4 GHz 26 dB MIN.@ 4-10 GHz

D. INSERTION LOSS: 0.05X (r(GHz) dB MAX. E. POWER HANDLING:200W MAX. 2.2 GHz AT 20°C

F. D.W.V: 1000 VRMS, MIN.


INSULATOR - PTFE, NATURAL

I. MATERIALS OF CONSTRUCTION:

4. PACKAGING:

A. QUANTITY: SINGLE PACK B. MARKING: BAG TO BE MARKED

"AMPHENOL RF, AD-SMAJ-PSMPJ-I, AND DATE CODE"

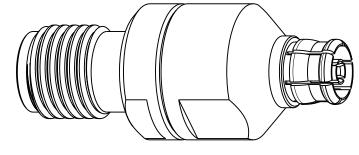

DATE

| 4 - May - 18

ECO

08102

APPR


BEW

REVISIONS

DESCRIPTION

RELEASE TO MFG.

SCALE 4.000

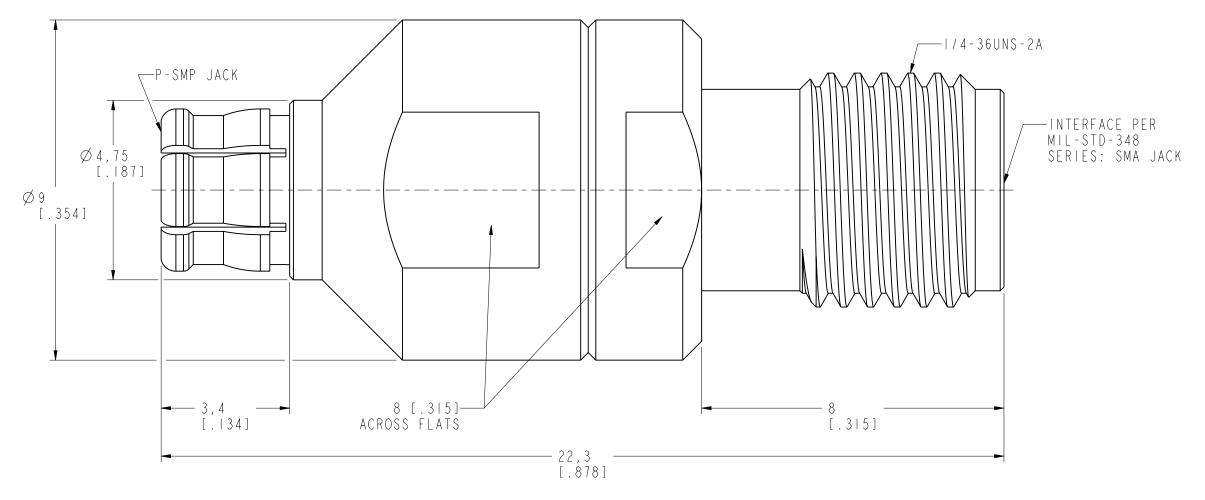

## **CUSTOMER OUTLINE DRAWING**

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:  <0.5mm  0.5 - 6mm  6 - 30mm  30 - 120mm  ANGLES  ±0.05mm  ±0.1mm  ±0.2mm  ±0.3mm  ±1°	MATERIAL -	DRAWN M.ZHANG	DATE  4-May- 8	TITLE P-SMP JACK TO SMA	Amphenol RF
NOTICE - These drawings, specifications, or other data (I) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they		ENGINEER M. ZHANG	DATE 08-Apr-16	JACK ADAPTER	www.amphenolrf.com
not to be regarded by implication or otherwise in any manner licensing, granting	REFERENCE EAR# 6971 AND	APPROVED S.HSIEH	DATE 15-May-18	SCALE: 10.0:1.0 SHEET 2 OF 2	DRAWING NO.AD-SMAJ-PSMPJ-I
or disclosed by said drawings, specifications, or other data.	CONFIGURATION LEVEL: In Work	CAD FILE	13 May 10	DWG SIZE REV	PART NO. AD-SMAJ-PSMPJ-I

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

AD-SMAJ-PSMPJ-1