
PRODUCT DATA DRAWING

DCN CONTROLLED DOCUMENT GENERATED DRAWING

1785-0003

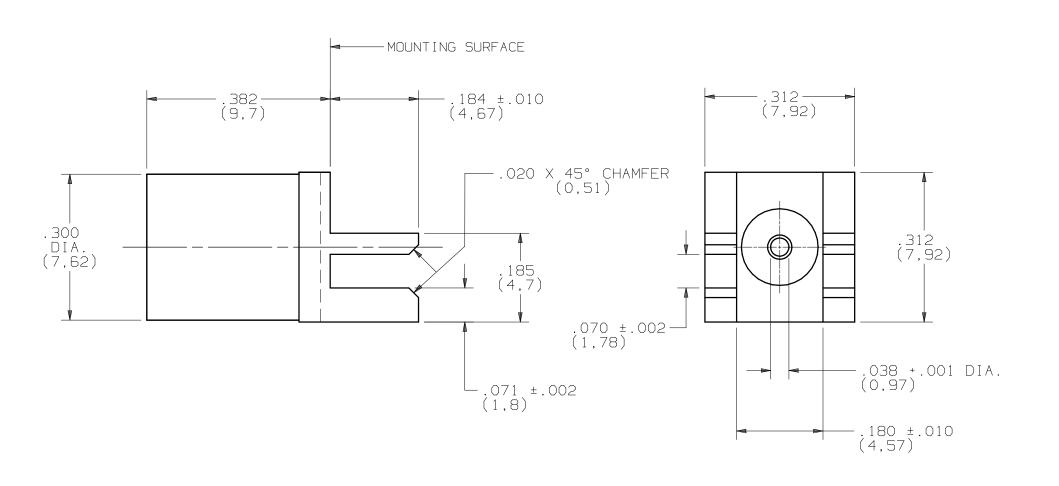

MATERIAL:

BRASS PER ASTM-B-16, ALLOY UNS C36000, HO2 BODY:

BERYLLIUM COPPER PER ASTM-B-196, ALLOY C17300, COND. TDO4 CONTACTS:

OUTER CONTACT: BERYLLIUM COPPER ALLOY 25, 1/4 HARD

INSULATOR: TEFLON PER ASTM-D-1457

FINISH:

BODY: COPPER, TIN, ZINC (TRI-M3)

CONTACTS, OUTER CONTACT: GOLD PER MIL-G-45204, TYPE I, GRADE C, CLASS 0; OVER COPPER PER MIL-C-14550,CLASS 2

PERFORMANCE:

IMPEDANCE: DWV: 1000 VRMS FREQ. RANGE: DC-22.0 GHz INSUL. RES.: 5000 MEGOHMS, MIN.

NOTES:

1. FOR RECOMMENDED FOOTPRINT TO YOUR SPECIFIC PCB, CONTACT SV MICROWAVE SALES DEPARTMENT (sales@svmicro.com, 561-840-1800).

SYM.	DESCRIPTION	DATE	APPR.	UNLESS OTHERWISE SPECIFIED: 1)all dimensions are after plating.			DIMENSIONS ARE IN INCHES TOLERANCES: DECIMALS FRACTIONAL ANGULAR			SV Microwave, Inc.	
_	REL.DCN 29713	04/03	BRT	2)BREAK CORNER 3)CHAM. 1st &	RS & EDGE: LAST THD:	S .005 R.MAX.	.X ±.03	30	ANGULAR X° ±1°0'	3301 Electronics Way West Palm Beach,FL,33407	
				4)SURFACE ROUGHNESS 63 / MIL-STD-10. 5)DIAS. ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 6)REMOVE ALL BURRS.		.XXX ±.00 MATERIAL:	5	x°x′±15′ □″ AREA:	TITLE: BMA JACK		
				DRAWN:	BRT 04/01/03				N/A	END LAUNCHER	
				CHECKED:	BRT	04/01/03	SIZE	CAGE NO.	SCALE	DWG.NO.	
				APPROVED:	BRT	04/01/03	В	95077	' 5X	1785-0003	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>Amphenol</u>: 1785-0003