
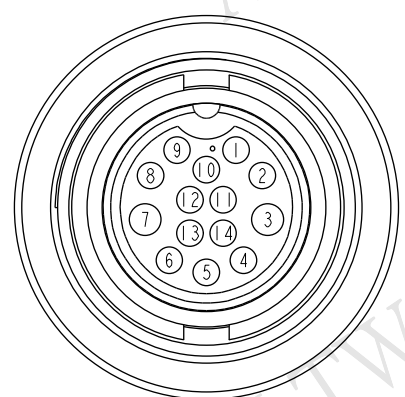


Technical drawing of the CDU-14BFMM-SL7000 cable assembly. The drawing shows a side view of the assembly with dimensions and callouts. The cable has a diameter of 7.0 mm. The length of the assembly is L (mm). The length of the cable section is 46.5 mm. The cable is labeled 'ALTW'. The cable is connected to a connector labeled 'CDU-14BFMM-SL7000' with a diameter of 25.4 mm. The cable is labeled 'Cable'.



Pin Assignments Front View

14	Brown/White	棕/白
13	Black/White	黑/白
12	Light Green	淺綠
11	Pink	粉紅
10	White	白
9	Gray	灰
8	Purple	紫
7	Blue	藍
6	Green	綠
5	Yellow	黃
4	Orange	橘
3	Red	紅
2	Brown	棕
1	Black	黑
Conn.	Wire Color	
Pin Out		

CDU-14BFMM-SL7AXX 

```

XX : 01~99Meters
01 : 01Meter
02 : 02Meters
      :
      :
99 : 99Meters

```

Cable Length(L):01~99Meters

Note:

- *  Important Dimension To Check
- * Waterproof Rate: IP67
- * Housing: Nylon+GF, Black
- * Male Pin: Copper Alloy, Gold Plated
- * Screw Nut: Nylon+GF, Black
- * O-Ring: EPDM, Black
- * Cable: UL2464 24AWG*14C+Drain+Al/My,
Black,PVC Jacket,UV Resistant,OD=7.0
- * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT:mm				TITLE Middle Cable Screw 14Pin F Conn M Pin			
TOLERANCE ±0.5 mm				SCALE 1:1		SIZE A4	
				REV. C		SHEET 1 OF 1	
				WC-REV. A.1		QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Vicky	2014-09-01
DWG NO	CHECKED BY	DATE
CDU-14BFMM-SL7AXX	Sam	2014-09-01
CUSTOMER	APPROVED BY	DATE
ALTW	Rita	2014-09-01

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[CDU-14BFMM-SL7A05](#) [CDU-14BFMM-SL7A01](#) [CDU-14BFMM-SL7A02](#) [CDU-14BFMM-SL7A10](#)