
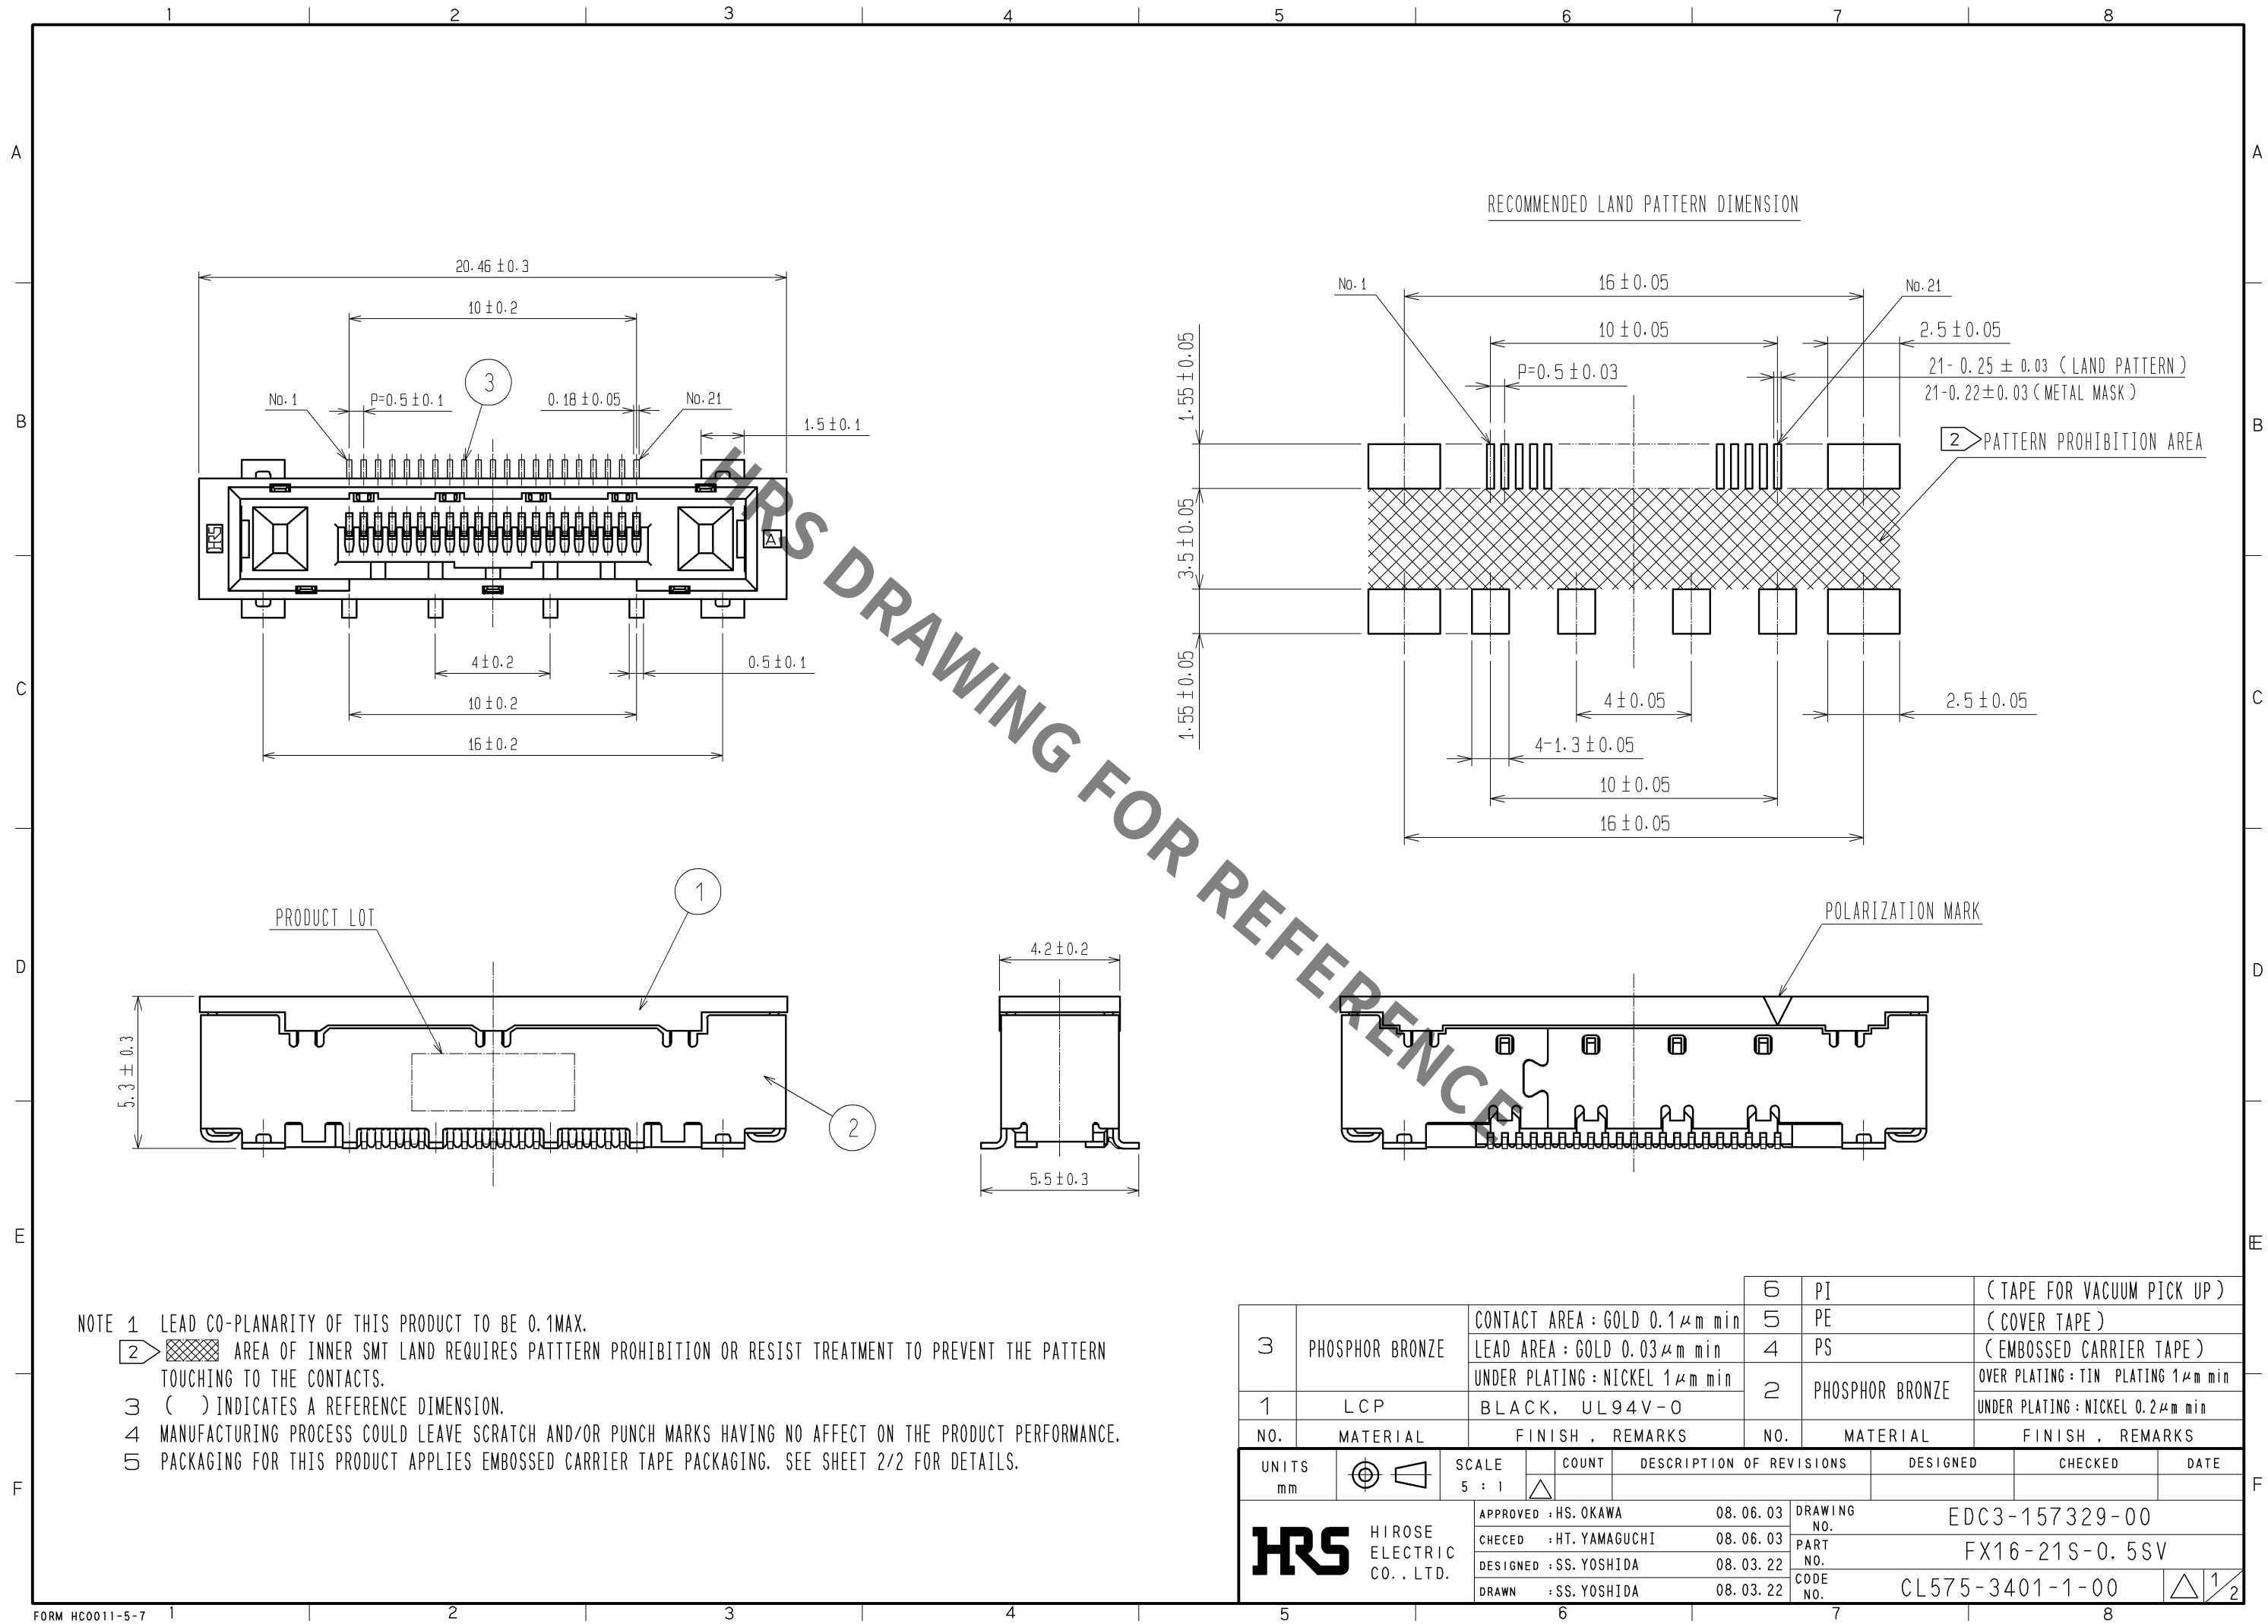



Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



NOTE 1 LEAD CO-PLANARITY OF THIS PRODUCT TO BE 0.1MAX.
2 AREA OF INNER SMT LAND REQUIRES PATTERN PROHIBITION OR RESIST TREATMENT TO PREVENT THE PATTERN TOUCHING TO THE CONTACTS.
3 () INDICATES A REFERENCE DIMENSION.
4 MANUFACTURING PROCESS COULD LEAVE SCRATCH AND/OR PUNCH MARKS HAVING NO AFFECT ON THE PRODUCT PERFORMANCE.
5 PACKAGING FOR THIS PRODUCT APPLIES EMBOSSED CARRIER TAPE PACKAGING. SEE SHEET 2/2 FOR DETAILS.

3	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.1μm min	6	PI	(TAPE FOR VACUUM PICK UP)					
		LEAD AREA : GOLD 0.03μm min	5	PE	(COVER TAPE)					
		UNDER PLATING : NICKEL 1μm min	4	PS	(EMBOSSED CARRIER TAPE)					
1	LCP	BLACK, UL94V-0	2	PHOSPHOR BRONZE	OVER PLATING : TIN PLATING 1μm min					
					UNDER PLATING : NICKEL 0.2μm min					
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS				
UNITS mm			SCALE 5 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA		08.06.03		DRAWING NO.		EDC3-157329-00		
		CHECED : HT. YAMAGUCHI		08.06.03		PART NO.		FX16-21S-0.5SV		
		DESIGNED : SS. YOSHIDA		08.03.22		CODE NO.		CL575-3401-1-00		
		DRAWN : SS. YOSHIDA		08.03.22						
								 1/2		

Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

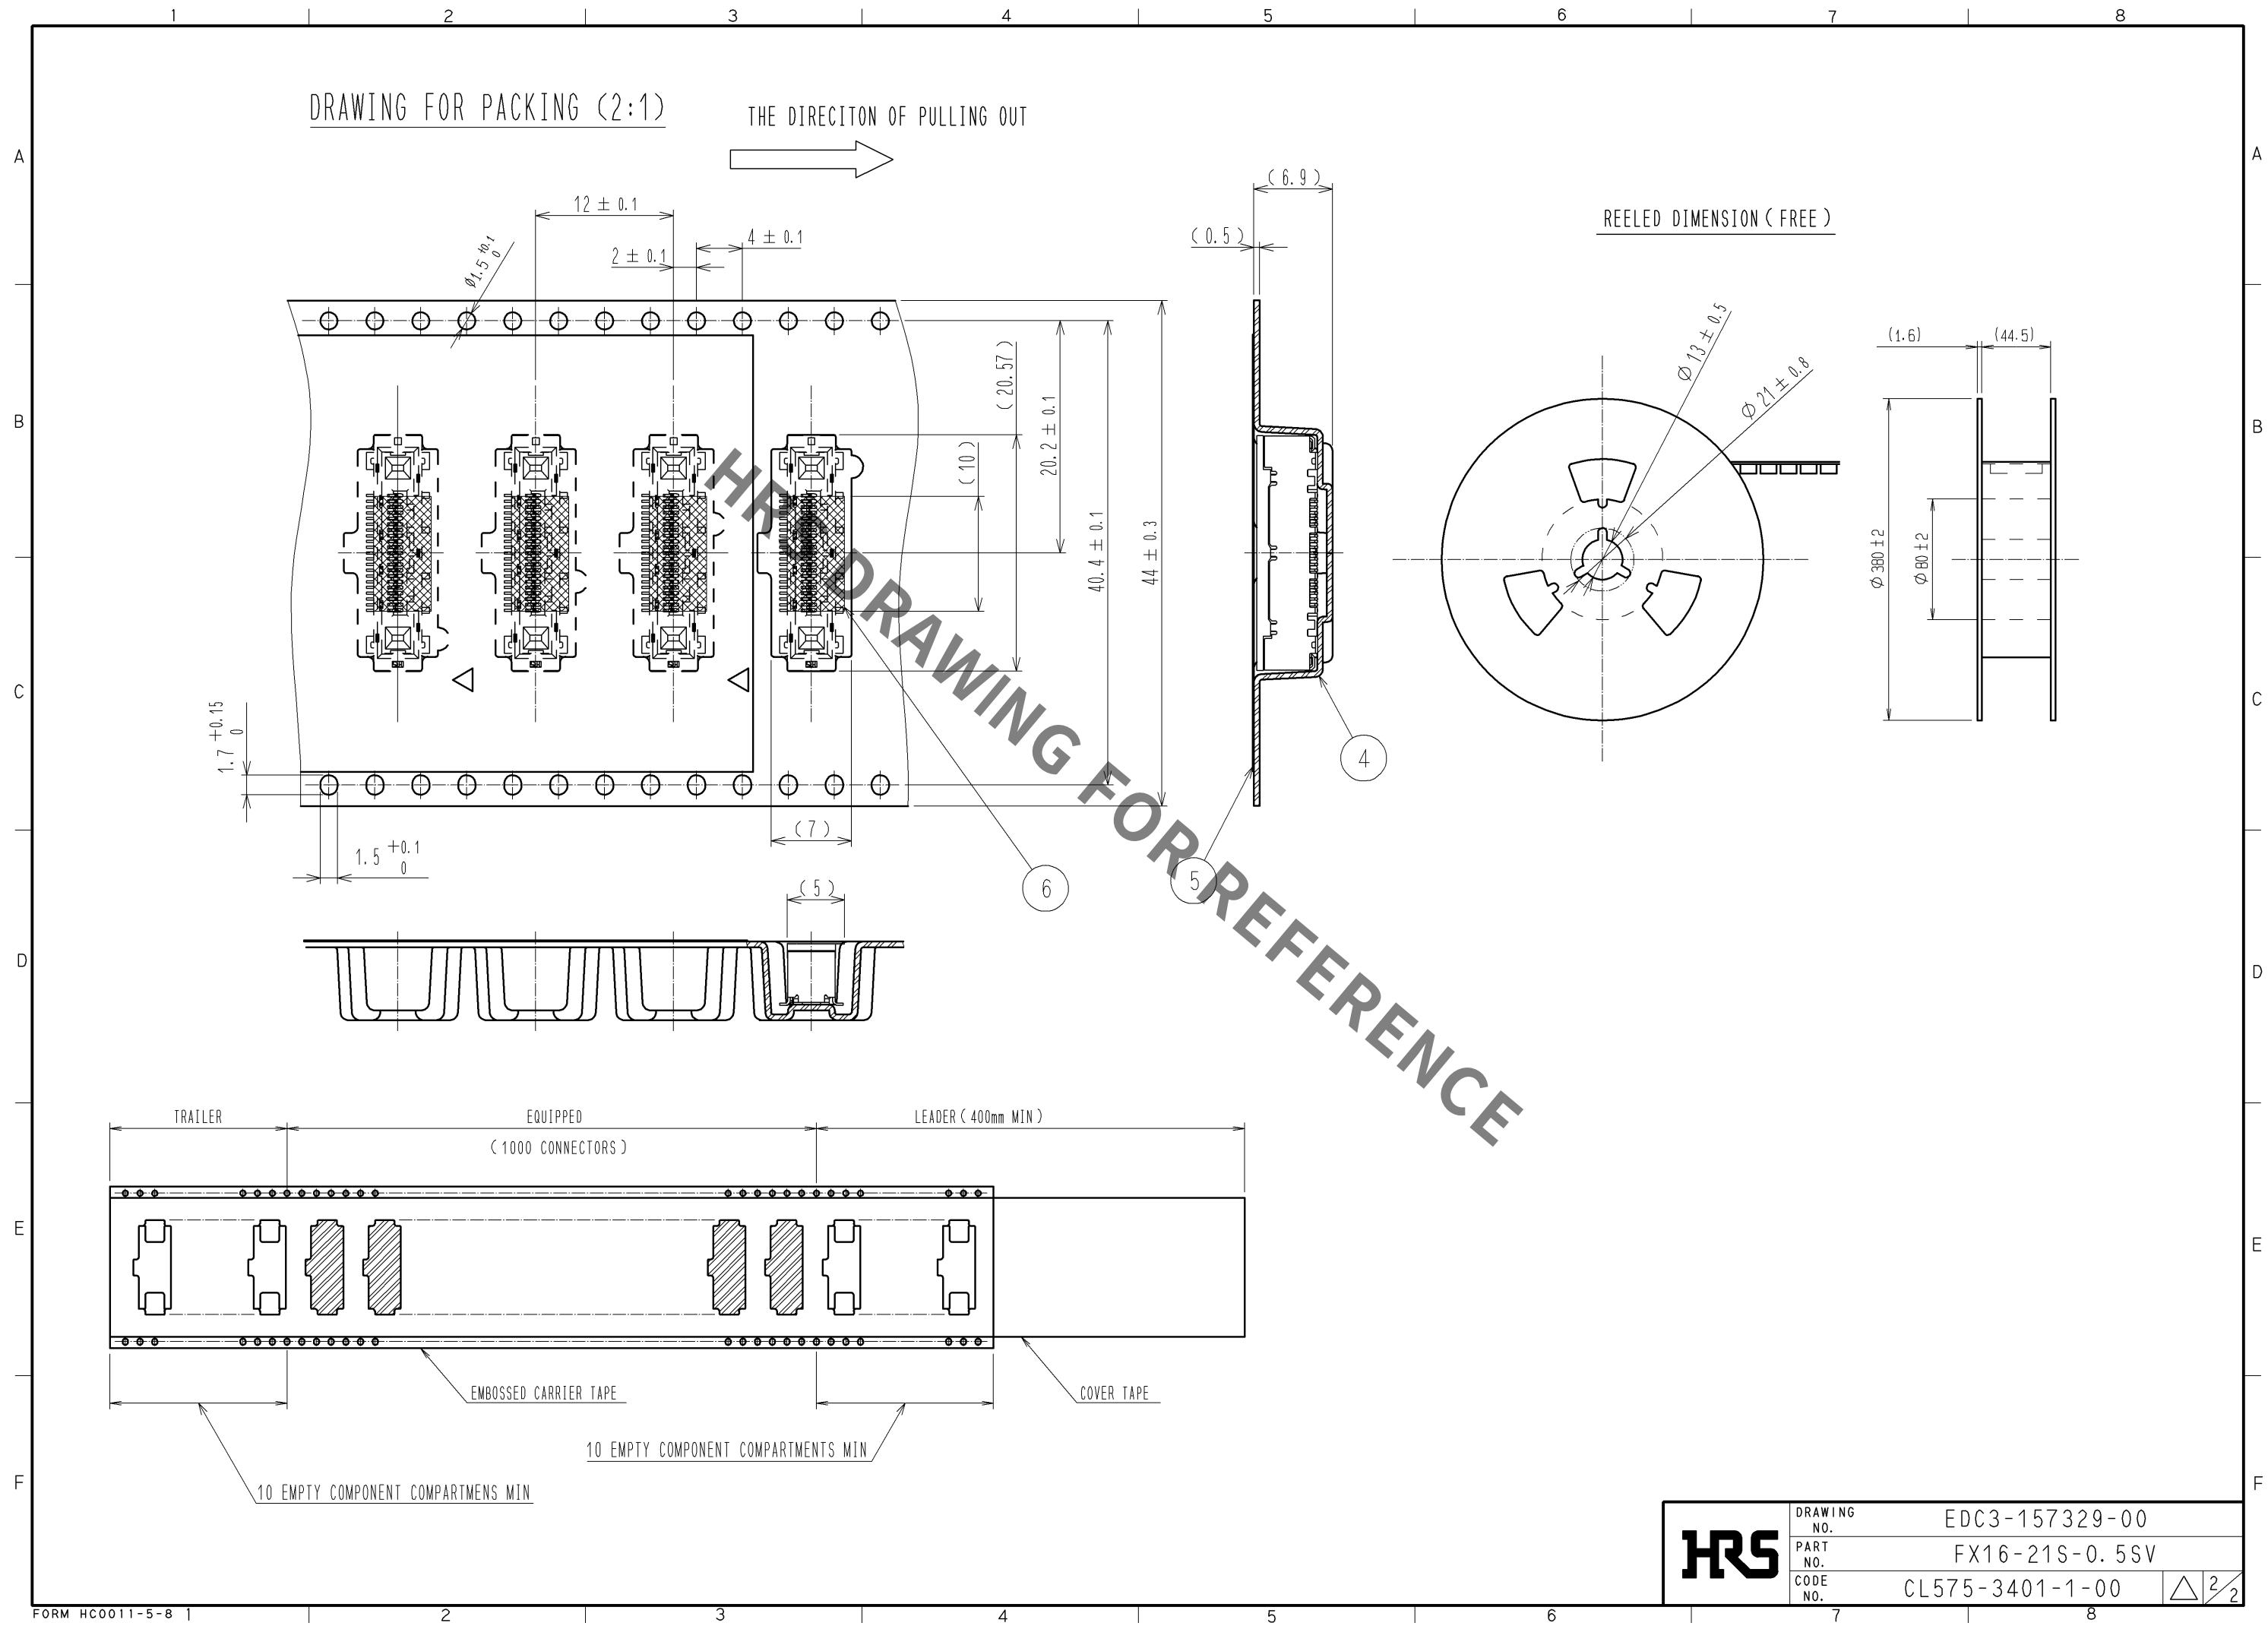

HRS	DRAWING NO.	EDC3-157329-00	 2/2
	PART NO.	FX16-21S-0.5SV	
	CODE NO.	CL575-3401-1-00	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX16-21S-0.5SV](#)