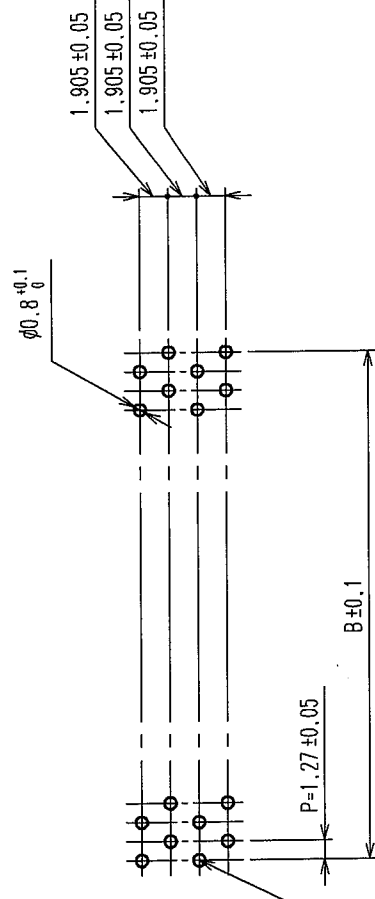
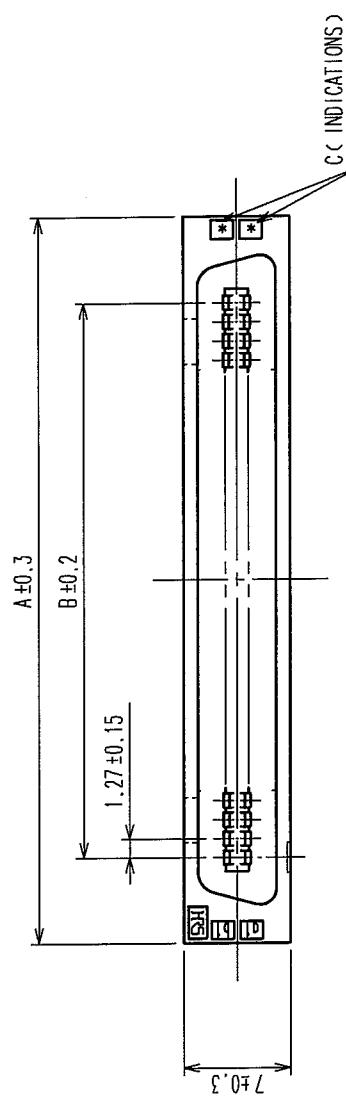


COUNT		DESCRIPTION OF REVISIONS		BY	CHKD	DATE	COUNT		DESCRIPTION OF REVISIONS		BY	CHKD	DATE
△						• •	△						• •
△						• •	△						• •
△						• •	△						• •

RECOMMENDED PC BOARD HOLE PATTERN (MOUNTING SIDE)

$$t=1.6$$


PART No.	CODE No.	$\geq$	A	B	C
FX2CA2-20P-1.27DSA(71)	CL572-2321-0-71	20	22.75	11.43	10
FX2CA2-32P-1.27DSA(71)	CL572-2322-2-71	32	30.37	19.05	16
FX2CA2-40P-1.27DSA(71)	CL572-2323-5-71	40	35.45	24.13	20
FX2CA2-52P-1.27DSA(71)	CL572-2324-8-71	52	43.07	31.75	26
FX2CA2-60P-1.27DSA(71)	CL572-2325-0-71	60	48.15	36.83	30
FX2CA2-68P-1.27DSA(71)	CL572-2326-3-71	68	53.23	41.91	34
FX2CA2-80P-1.27DSA(71)	CL572-2327-6-71	80	60.85	49.53	40
FX2CA2-100P-1.27DSA(71)	CL572-2328-9-71	100	73.55	62.23	50
FX2CA2-120P-1.27DSA(71)	CL572-2329-1-71	120	86.25	74.93	60

NOTES 1. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 $\boxed{2}$ NUMBER OF PIN.

4	POLYAMIDE	BLACK	UL94V-0	3	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.2μm min		
1,2	POLYAMIDE	BLACK	UL94V-0			DIP AREA: TIN-PLATING 2μm min		
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS	UNDER PLATING: NICKEL 2μm min		
CODE NO. (OLD)			DRAWN		DESIGNED	CHECKED	APPROVED	RELEASED
CL			I. OKAYAMA		K. NAKAMURA	H. OKAWA	H. OKAWA	
			04.06.02		04.06.02	04.06.09	04.06.09	.

	DRAWING NO.		EDC3-083055-21	PART NO. FX2CA2-**-P-1.27DSA(71)	1
	SCALE	FREE			
UNITS mm		HIROSE ELECTRIC CO., LTD		CODE NO. CL572	1

TO	PCK			
----	-----	--	--	--

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX2CA2-60P-1.27DSA\(71\)](#)