



# BGSA149M2N10

# Ultra low OFF capacitance antenna tuning SP4T

## Features

- Low  $R_{ON}$  resistance of 1.6  $\Omega$  in ON state
- Low C<sub>OFF</sub> capacitance of 78 fF in OFF state
- RF operating voltage handling 50 V in OFF state
- MIPI RFFE 2.1 control interface
- Digital control of the ESD switch enabling a shunt to ground throw
- 1.8V and 1.2V VIO operation
- External USID\_SEL pin enabling 4 default USID addresses
- Small form factor 0.95 mm x 1.3 mm (MSL1, 260°C per JEDEC J-STD-020)

## **Potential applications**

- Impedance, antenna, capacitance and inductance tuning
- Tunable filters




RoHS
Halogen-Free
🗭 Lead-Free
Green

## Description

The BGSA149M2N10 is a single-pole four throws (SP4T) antenna tuning switch optimized for RF applications up to 7.125 GHz.



# Block diagram and ordering information

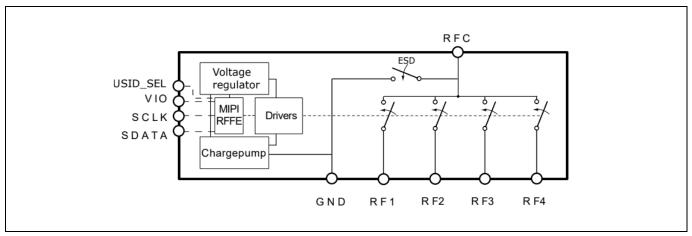

## Figure 1 BGSA149M2N10 Block diagram

## Table 1 Ordering Information

Туре	Marking	Package	Product name
BGSA149M2N10	A2	TSNP-10-9	BGSA 149M2N10 E6327
		TSNP-10-10	

### For more technical information, please contact our Technical Assistance Center or your local Infineon representative.

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2019-09-16 Published by Infineon Technologies AG 81726 München, Germany

© 2023 Infineon Technologies AG. All Rights Reserved.

Do you have a question about this document? Email: erratum@infineon.com

Document reference

ifx1

#### IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application. For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office (www.infineon.com).

#### WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Infineon:

BGSA149M2N10E6327XTSA1