


版 数 REV.	年月日 DATE	DCN NO.	変 更 内 容 DESCRIPTION	製 図 DR.	担 当 CHK.	査 閲 APPD.	承 認 APPD.
2	29.Mar.2006	059705	CORRECTED OUTSIDE	J.SHINDOU	M.KIMURA	—————	K.HISATOMI
3	14.Oct.2011	000564	ADDED NOTE3	—————	S.AOKI	N.UCHIYAMA	T.MIYASHITA

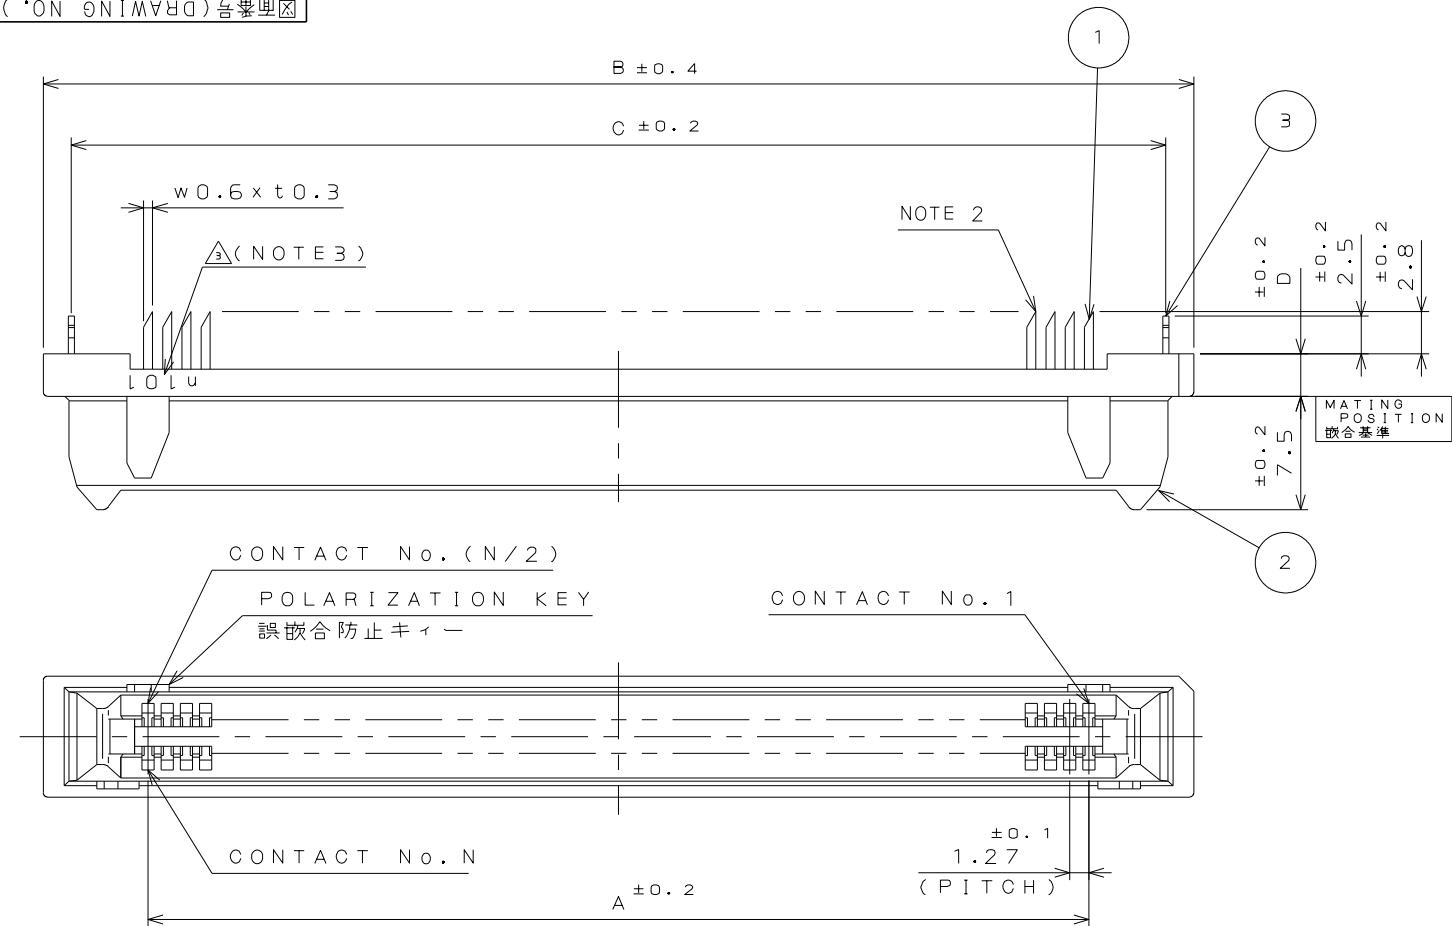

NOTE 1. STACKING HEIGHT = HEIGHT CODE OF
TX24 + HEIGHT CODE OF TX25
(EX.) 10+8=18mm

2.DIRECTION OF CUTTING EDGE OF CONTACTS TERMINAL
IS OPTIONAL.
BUT,IN THE CONNECTOR, IT MUST FACE THE SAME SIDE.

3. IN THE CASE OF THE CONNECTOR PRODUCED IN CHINA,
PRODUCTION LOT NUMBER IS MARKED AS INDICATED.

(E x .) n 1 0 1

LOT No. OF CURRENT DAY(0:10,A:11,B:12,C:13···)

MANUFACTURER MONTH(OCT. :O, NOV. :X, DEC. :Y)

MANUFACTURER YEAR(LAST DIGIT ONLY '11, ...)

PRODUCTION SITE

注1. スタッキング接続の場合、嵌合高さコードの和が、基板間寸法となる。

(例) $10+8=18\text{mm}$

2.コンタクト端末の斜め切断の向きは任意とする。
但し、コネクタ内では同一の向きである。

△3. 中国で生産したコネクタは、図示の位置にロット番号を表示する。



(例) $n = 101$

製造日 (0:10, A:11, B:12, C:13...)

製造月(10月:0, 11月:X, 12月:Y)

製造年(西曆末尾 '11, ...)

生産拠点

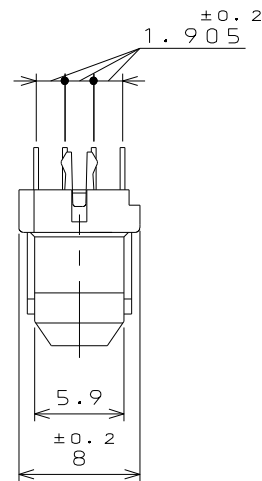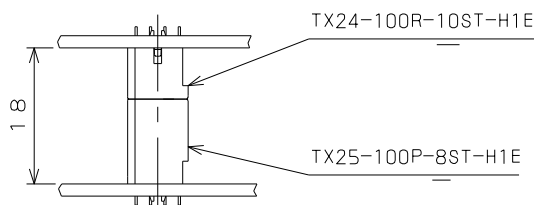

APPLICABLE P.C.B. DIMENSION (REF.)

適合基板寸法 (参考)
(SCALE 1:1)

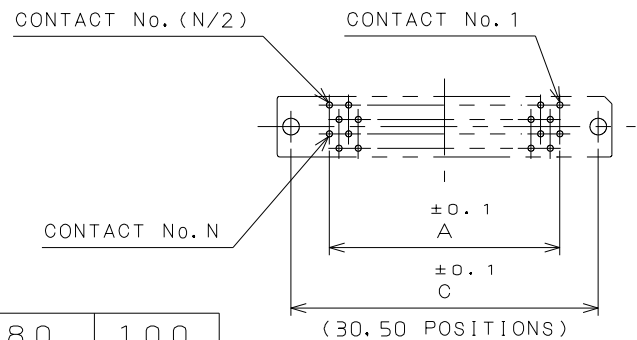
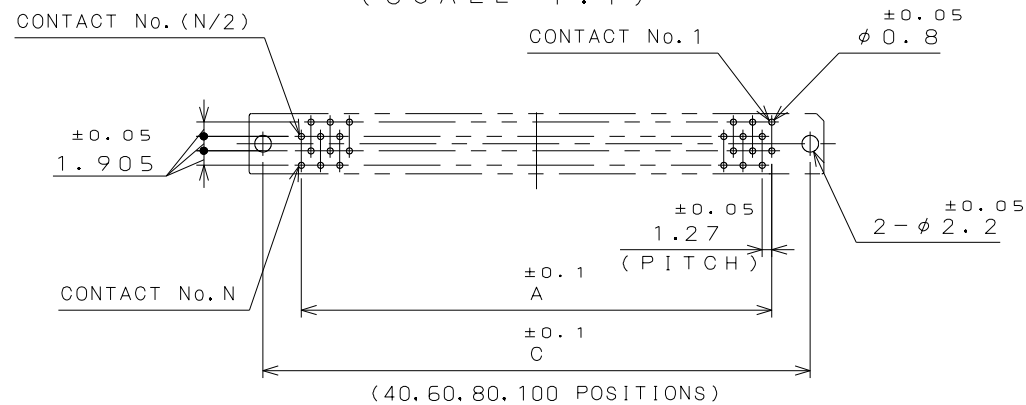



TABLE 1. DIMENSION

NO.OF CONTACTS	3 0	4 0	5 0	6 0	8 0	1 0 0
A	17. 78	24. 13	30. 48	36. 83	49. 53	62. 23
B	31. 7	38	44. 4	50. 7	63. 4	76. 1
C	27. 94	34. 29	40. 64	46. 99	59. 69	72. 39

TABLE 2

AREA \ FINISH	1
CONTACT AREA	GOLD(0.1 μ mMIN.) OVER NICKEL
TERMINAL AREA	(LEAD FREE) TIN/TIN ALLOY

STACKING HEIGHT CODE	6	1 0	1 2
D	2.8	6.8	8.8

3	HOOK PIN	2	COPPER ALLOY	(LEAD FREE)TIN/TIN ALLOY	
2	INSULATOR	1	GLASS FILLED PBT	—————	UL94 V-0 BLACK
1	CONTACT	N	COPPER ALLOY	SEE TABLE 2	
符号 NO.	名称 DESCRIPTION	個数 QTY.	材料 MATERIAL	仕上 FINISH	備考 REMARKS
仕様書 (SPECIFICATION) JACS-1425		第1版 (ORIGINAL DATE) 3.Mar.2003		尺度 (SCALE) 2 : 1	シリーズ (SERIES) T X 2 4
		製図 DR.	M.TANAKA	名称 (TITLE) T X 2 4 - ※ R - * S T - H 1 E	
一般公差 (GENERAL TOLERANCE)		担当 CHK.	M.KIMURA	 JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.	
		査閲 APPD.	—————		
寸法 (DIMENSION)		承認 APPD.	S.KASHIWAGI	図面番号 (DRAWING NO.) SJ038252	
. ± 0.8 . X ± 0.4 . X X ± 0.1 . X X X ±		角度 (ANGLES) X° ± X° X' ±		質量 (MASS)	
					

JAE CONNECTOR DIV. PROPRIETARY.
COPYRIGHT(C) 2003, JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.

LEAD FREE この製品は鉛フリー品です

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[JAE Electronics:](#)

[TX24-30R-10ST-H1E](#) [TX24-30R-12ST-H1E](#) [TX24-30R-6ST-N1E](#)