

# Data sheet

Title: FIXED THICK FILM CHIP RESISTORS; RECTANGULAR  
TYPE AND ULTRAHIGH VOLTAGE

Style: RZC50, 63

AEC-Q200 qualified

RoHS COMPLIANCE ITEM  
Halogen and Antimony Free

- Note:
- Stock conditions  
Temperature: +5°C ~ +35°C  
Relative humidity: 25% ~ 75%  
The period of guarantee: Within 2 year from shipment by the company.  
Solderability shall be satisfied.
  - Product specification contained in this data sheet  
are subject to change at any time without notice
  - If you have any questions or a Purchasing Specification for any quality  
Agreement is necessary, please contact our sales staff.



**釜屋電機株式会社**  
**KAMAYA ELECTRIC CO., LTD.**

Hokkaido Research Center  
Approval by: T. Sannomiya  
Drawing by: M. Shibuya

## 1. Scope

1.1 This data sheet covers the detail requirements for fixed thick film chip resistors; rectangular type and ultrahigh voltage, style of RZC50, 63.

## 1.2 Applicable documents

JIS C 5201-1: 2011, JIS C 5201-8: 2014, JIS C 5201-8-1: 2014

IEC60115-1: 2008, IEC60115-8: 2009, IEC60115-8-1: 2014

EIAJ RC-2134C-2010

## 2. Classification

Type designation shall be the following form.

(Example) 

|     |    |   |     |   |    |
|-----|----|---|-----|---|----|
| RZC | 63 | — | 475 | J | TE |
| 1   | 2  | 3 | 4   | 5 | 6  |

Style

1 Fixed thick film chip resistors; rectangular type & ultrahigh voltage

2 Rated dissipation and / or dimension

3 Temperature coefficient of resistance

4 Rated resistance Example; 475 → 4.7MΩ

|     |                                     |
|-----|-------------------------------------|
| 475 | E24 Series, 3 digit, Ex. 475→4.7MΩ, |
|-----|-------------------------------------|

5 Tolerance on rated resistance

|   |      |
|---|------|
| J | ±5%  |
| K | ±10% |
| M | ±20% |

6 Packaging form

|    |                      |
|----|----------------------|
| B  | Bulk (loose package) |
| TE | Embossed taping      |

 Style

## 3. Rating

3.1 The ratings shall be in accordance with Table-1.

Table-1

| Style | Rated dissipation (W) | Temperature coefficient of resistance ( $10^{-6} / ^\circ\text{C}$ ) |      | Rated resistance range ( $\Omega$ ) | Preferred number Series for resistors | Tolerance on rated resistance |
|-------|-----------------------|----------------------------------------------------------------------|------|-------------------------------------|---------------------------------------|-------------------------------|
| RZC50 | 0.5                   | Standard                                                             | ±200 | 1M~16M                              | E24                                   | J(±5%), K(±10%), M(±20%)      |
| RZC63 | 1.0                   |                                                                      |      |                                     |                                       |                               |

| Style | Limiting element voltage (V) | Isolation voltage (V) | Category temperature range ( $^\circ\text{C}$ ) |
|-------|------------------------------|-----------------------|-------------------------------------------------|
| RZC50 | 1500                         | 500                   | -55~+125                                        |
| RZC63 | 2000                         |                       |                                                 |

## 3.2 Climatic category

55/125/56

Lower category temperature - 55  $^\circ\text{C}$

Upper category temperature +125  $^\circ\text{C}$

Duration of the damp heat, steady state test 56days

### 3.3 Stability class

5%

Limits for change of resistance:

–for long-term tests  $\pm(5\%+0.1\Omega)$ 

–for short-term tests  $\pm(1\%+0.05\Omega)$ 

### 3.4 Derating

The derated values of dissipation at temperature in excess of 70 °C shall be as indicated by the following curve.

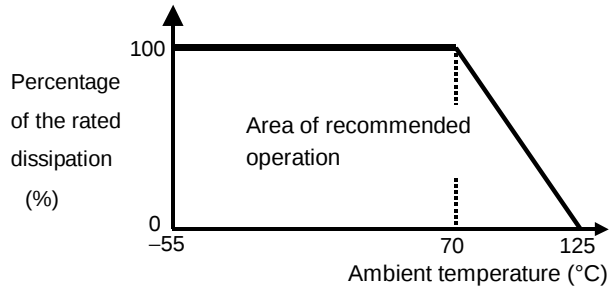


Figure-1 Derating curve

### 3.5 Rated voltage

d. c. or a. c. r. m. s. voltage calculated from the square root of the product of the rated resistance and the rated dissipation.

$$E = \sqrt{P \cdot R}$$

E : Rated voltage (V)

P : Rated dissipation (W)

R : Rated resistance ( $\Omega$ )

Limiting element voltage can only be applied to resistors when the resistance value is equal to or higher than the critical resistance value.

At high value of resistance, the rated voltage may not be applicable.

### 4. Packaging form

The standard packaging form shall be in accordance with Table-2.

Table-2

| Symbol | Packaging form       |                         | Standard packaging quantity / units |
|--------|----------------------|-------------------------|-------------------------------------|
| B      | Bulk (loose package) |                         | 1,000 pcs.                          |
| TE     | Embossed taping      | 12mm width, 4mm pitches | 4,000 pcs.                          |

## 5. Dimensions

5.1 The resistor shall be of the design and physical dimensions in accordance with Figure-2 and Table-3.

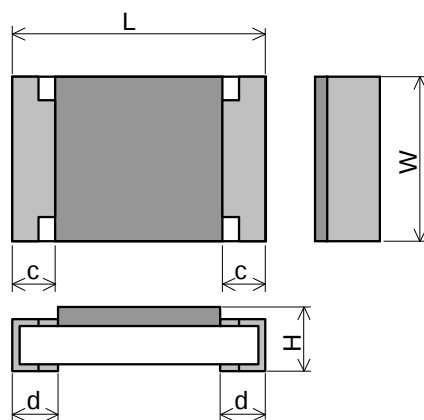


Figure-2

Table-3

Unit : mm

| Style | L              | W              | H               | c             | d             |
|-------|----------------|----------------|-----------------|---------------|---------------|
| RZC50 | $5.0 \pm 0.15$ | $2.5 \pm 0.15$ | $0.55 \pm 0.15$ | $0.6 \pm 0.2$ | $0.6 \pm 0.2$ |
| RZC63 | $6.3 \pm 0.15$ | $3.2 \pm 0.15$ | $0.55 \pm 0.15$ | $0.6 \pm 0.2$ | $0.6 \pm 0.2$ |

## 5.2 Net weight (Reference)

| Style | Net weight(mg) |
|-------|----------------|
| RZC50 | 25             |
| RZC63 | 40             |

## 6. Marking

The Rated resistance shall be marked in 3 digits (E24) and marked on over coat side.

(Example) "475"  $\rightarrow 47 \times 10^5 [\Omega] \rightarrow 4.7 [M\Omega]$

## 7. Performance

7.1 The standard condition for tests shall be in accordance with Sub-clause 4.2, JIS C 5201-1: 2011

7.2 The performance shall be satisfied in Table-4.

Table 4(1)

[illegible]

Table-4(2)

| No | Test items                                                                       | Condition of test (JIS C 5201-1)                                                                                                                                                                                                                                                                                                                                                                                                                                    | Performance requirements                                                                                                                                     |
|----|----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 6  | Mounting<br><br>Bound strength of the end face plating<br><br>Final measurements | Sub-clause 4.31<br>Substrate material: Epoxide woven glass<br>Test substrate: Figure-4<br>Sub-clause 4.33<br>Bent value: 1 mm<br>Resistance<br>Sub-clause 4.33.6<br>Visual examination                                                                                                                                                                                                                                                                              | $\Delta R \leq \pm (1\%+0.05\Omega)$<br><br>No visible damage                                                                                                |
| 7  | Resistance to soldering heat<br><br><br>Component resistance solvent             | Sub-clause 4.18<br>Solvent temperature: $260\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$<br>Immersion time: $5\text{ s} \pm 0.5\text{ s}$<br>Visual examination<br><br>Resistance<br>Sub-clause 4.29<br>Solvent: 2-propanol<br>Solvent temperature: $23\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$<br>Method 2<br>Recovery: 48 h<br>Visual examination<br>Resistance                                                                         | As in 4.18.3.4<br>No sign of damage such as cracks.<br>$\Delta R \leq \pm (1\%+0.05\Omega)$<br><br>No visible damage<br>$\Delta R \leq \pm (1\%+0.05\Omega)$ |
| 8  | Mounting<br><br>Adhesion<br><br><br>Rapid change temperature                     | Sub-clause 4.31<br>Substrate material: Epoxide woven glass<br>Test substrate: Figure-3<br>Sub-clause 4.32<br>Force: 5 N<br>Duration: $10\text{ s} \pm 1\text{ s}$<br>Visual examination<br>Sub-clause 4.19<br>Lower category temperature:<br>$-55\text{ }^{\circ}\text{C}$<br>Upper category temperature:<br>$+125\text{ }^{\circ}\text{C}$<br>Duration of exposure at each temperature: 30 min.<br>Number of cycles: 5 cycles.<br>Visual examination<br>Resistance | No visible damage<br><br><br><br><br><br><br>No visible damage<br>$\Delta R \leq \pm (1\%+0.05\Omega)$                                                       |


Table-4(3)

| No | Test items                                                                                                                                                                                  | Condition of test (JIS C 5201-1)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Performance requirements                                 |
|----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|
| 9  | Climatic sequence<br>–Dry heat<br><br>–Damp heat, cycle<br>(12+12hour cycle)<br>First cycle<br><br>–Cold<br><br>–Damp heat, cycle<br>(12+12hour cycle)<br>Remaining cycle<br><br>–D.C. load | Sub-clause 4.23<br>Sub-clause 4.23.2<br>Test temperature: +125 °C<br>Duration: 16 h<br>Sub-clause 4.23.3<br>Test method: 2<br>Test temperature: 55 °C<br>[Severity(2)]<br>Sub-clause 4.23.4<br>Test temperature –55 °C<br>Duration: 2h<br>Sub-clause 4.23.6<br>Test method: 2<br>Test temperature: 55 °C<br>[Severity (2)]<br>Number of cycles: 5 cycles<br>Sub-clause 4.23.7<br>The applied voltage shall be the rated voltage<br>or the limiting element voltage which ever is<br>the smaller.<br>Duration: 1 min.<br>Visual examination<br>Resistance | No visible damage<br>$\Delta R \leq \pm (5\%+0.1\Omega)$ |
| 10 | Mounting<br><br><br>Endurance at 70 °C                                                                                                                                                      | Sub-clause 4.31<br>Substrate material: Epoxide woven glass<br>(RZC63 may use Alumina substrate.)<br>Test substrate: Figure-3<br>Sub-clause 4.25.1<br>Ambient temperature: 70 °C $\pm$ 2 °C<br>Duration: 1000 h<br>The voltage shall be applied in cycles of 1.5 h<br>on and 0.5 h.<br>The applied voltage shall be the rated voltage<br>or the limiting element voltage which ever is<br>the smaller.<br>Examination at 48 h , 500 h and<br>1000 h:<br>Visual examination<br>Resistance                                                                  | No visible damage<br>$\Delta R \leq \pm (5\%+0.1\Omega)$ |
| 11 | Mounting<br><br><br>Variation of resistance with<br>temperature                                                                                                                             | Sub-clause 4.31<br>Substrate material: Epoxide woven glass<br>Test substrate: Figure-3<br>Sub-clause 4.8<br>–55 °C / +20 °C<br>+20 °C / +125°C                                                                                                                                                                                                                                                                                                                                                                                                           | As in Table-1                                            |

Table-4(4)

| No | Test items                                                                         | Condition of test (JIS C 5201-1)                                                                                                                                                                                                                                                                                                                                                                                                                                         | Performance requirements                                                                      |
|----|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| 12 | Mounting<br><br>Damp heat, steady state                                            | Sub-clause 4.31<br>Substrate material: Epoxide woven glass<br>Test substrate: Figure-3<br>Sub-clause 4.24<br>Ambient temperature: 40 °C ± 2 °C<br>Relative humidity : 93 $\pm$ <sub>3</sub> <sup>2</sup> %<br>a) 1st group: without voltage applied.<br>b) 2nd group: The d. c. voltage shall be applied continuously.<br>The voltage shall be accordance with Sub-clause 4.24.2.1 b). without polarizing voltage [4.24.2.1, c)]<br>Visual examination<br><br>Resistance | No visible damage<br>Legible marking<br>$\Delta R \leq \pm (5\%+0.1\Omega)$                   |
| 13 | Dimensions (detail)<br><br>Mounting<br><br>Endurance at upper category temperature | Sub-clause 4.4.3<br><br>Sub-clause 4.31<br>Substrate material: Epoxide woven glass<br>Test substrate: Figure-3<br>Sub-clause 4.25.3<br>Ambient temperature: 125 °C ± 2 °C<br>Duration: 1000 h<br>Examination at 48 h, 500 h and 1000 h:<br>Visual examination<br>Resistance                                                                                                                                                                                              | As in Table-3<br><br><br><br><br><br>No visible damage<br>$\Delta R \leq \pm (5\%+0.1\Omega)$ |
| 14 | Mounting<br><br>Anti-rush voltage test                                             | Sub-clause 4.31<br>Substrate material: Epoxide woven glass<br>Test substrate: Figure-3<br>Ambient temperature: 25 °C ± 2 °C<br>The voltage shall be applied in cycles of 1 s "ON", 9 s "OFF".<br>Test voltage: 3000V<br>Visual examination<br>Resistance                                                                                                                                                                                                                 | No visible damage<br>$\Delta R \leq \pm (1\%+0.05\Omega)$                                     |

## 8. Test substrate

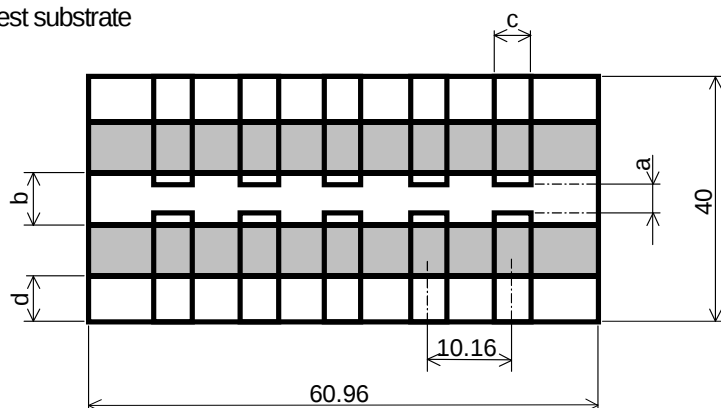


Unit: mm

□ :Copper clad  
■ :Solder resist

| Style | a   | b   | c   | d   |
|-------|-----|-----|-----|-----|
| RZC50 | 4.0 | 7.5 | 2.0 | 7.5 |
| RZC63 | 5.0 | 9.0 | 4.5 | 7.5 |

Figure-3 RZC50, 63 TEST SUBSTRATE

- Remark 1). Material: Epoxide woven glass  
Thickness: 1.6mm Thickness of copper clad: 0.035mm
- 2). In the case of connection by connector, the connecting terminals are gold plated.  
However, the plating is not necessary when the connection is made by soldering.

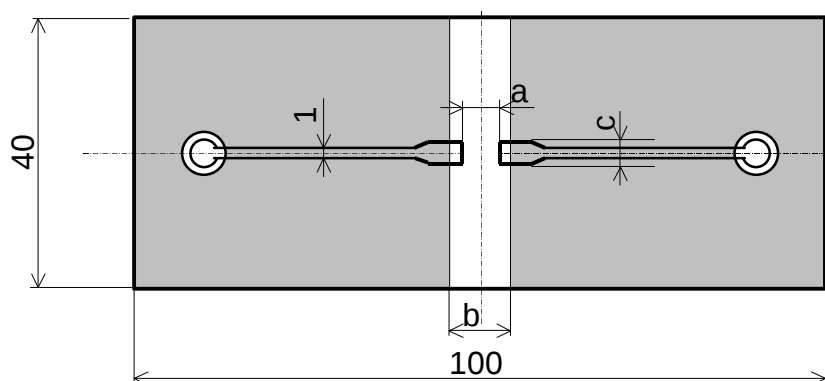

Unit: mm

□ :Copper clad  
■ :Solder resist

| Style | a   | b   | c   |
|-------|-----|-----|-----|
| RZC50 | 4.0 | 7.5 | 3.0 |
| RZC63 | 5.0 | 9.0 | 4.0 |

Figure-4 RZC50, 63 BOUND STRENGTH OF THE END FACE PLATING TEST SUBSTRATE

- Remark 1). Material: Epoxide woven glass  
Thickness: 1.6mm Thickness of copper clad: 0.035mm

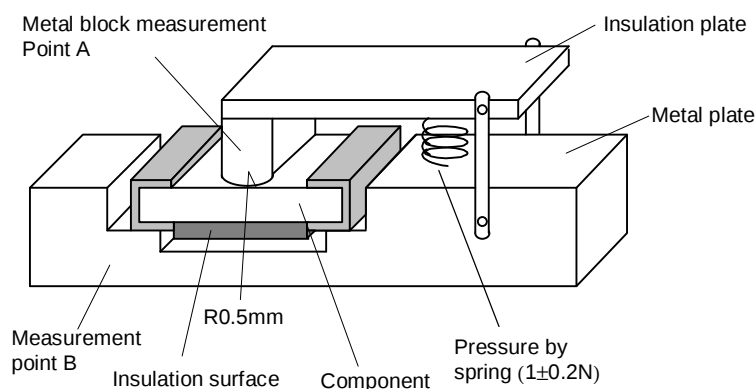


Figure-5

## 9. Taping

9.1 Applicable documents JIS C 0806-3: 2014, EIAJ ET-7200C: 2010

## 9.2 Taping dimensions

Embossed taping dimensions shall be in accordance with Figure-6 and Table-5.

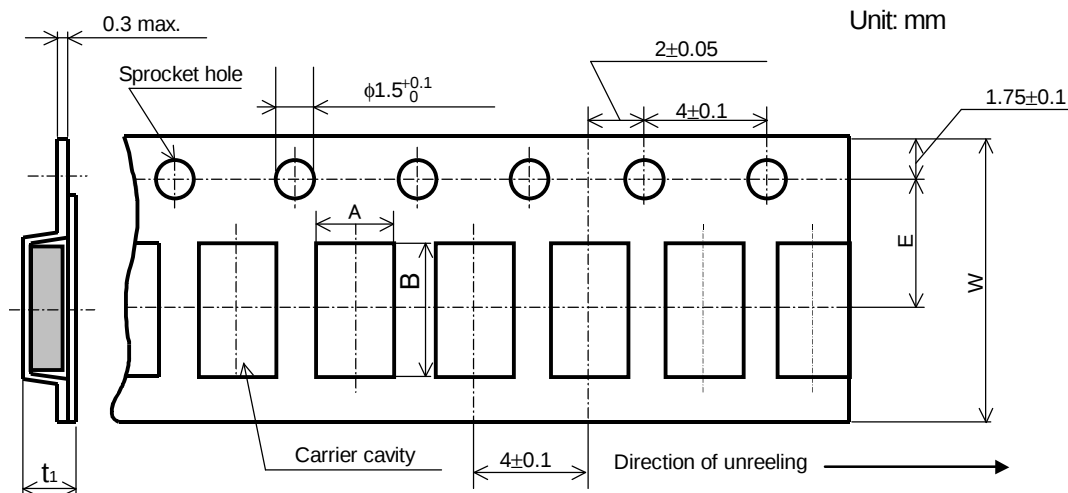


Figure-6

Table-5

Unit: mm

| Style | A             | B             | W              | E              | $t_1$          |
|-------|---------------|---------------|----------------|----------------|----------------|
| RZC50 | $3.1 \pm 0.2$ | $5.5 \pm 0.2$ | $12.0 \pm 0.3$ | $5.5 \pm 0.05$ | $1.1 \pm 0.15$ |
| RZC63 | $3.6 \pm 0.2$ | $6.9 \pm 0.2$ |                |                |                |

- 1). The cover tapes shall not cover the sprocket holes.
- 2). Tapes in adjacent layers shall not stick together in the packing.
- 3). Components shall not stick to the carrier tape or to the cover tape.
- 4). Pitch tolerance over any 10 pitches  $\pm 0.2$ mm.
- 5). The peel strength of the top cover tape shall be with in 0.1N to 0.5N on the test method as shown in the following Figure-7.
- 6). When the tape is bent with the minimum radius for 30 mm, the tape shall not be damaged and the components shall maintain their position and orientation in the tape.
- 7). In no case shall there be two or more consecutive components missing.  
The maximum number of missing components shall be one or 0.1%, whichever is greater.
- 8). The resistors shall be faced to upward at the over coating side in the carrier cavity.

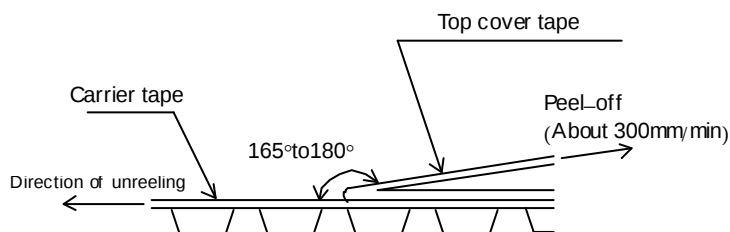


Figure-7

## 9.3 Reel dimension

Reel dimensions shall be in accordance with the following Figure-8 and Table-6.

Plastic reel (Based on EIAJ ET-7200C)

Unit: mm

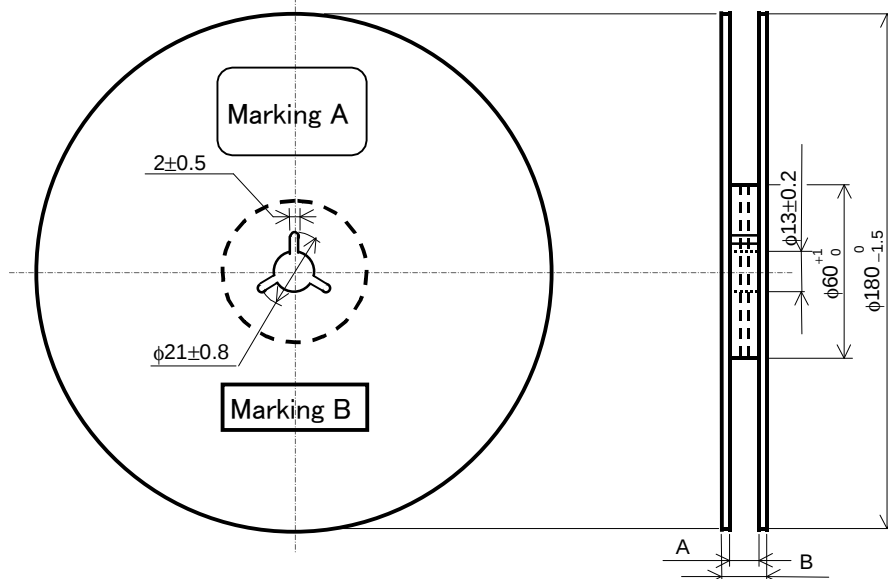


Figure-8

Table-6

Unit: mm

| Style    | A                | B      | Note           |
|----------|------------------|--------|----------------|
| RZC50,63 | 13 $^{+1.0}_{0}$ | 17±1.0 | Vacuum forming |

Note: Marking label shall be marked on a place of Marking A or two place of marking A and B.

## 9.4 Leader and trailer tape.

(Example)

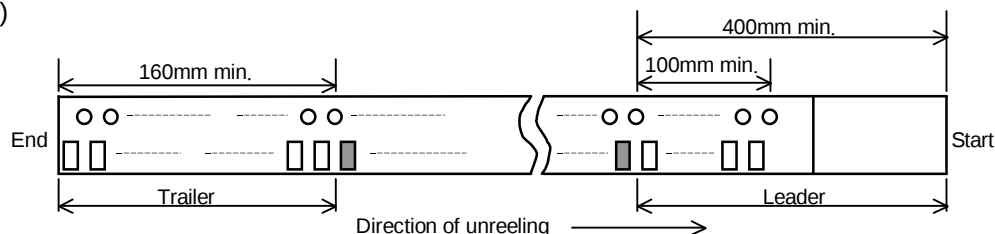


Figure-9

## 10. Marking on package

The label of a minimum package shall be legibly marked with follows.

## 10.1 Marking A

- (1) Classification (Style, Rated resistance, Tolerance on rated resistance, Packaging form)  
(2) Quantity (3) Lot number (4) Manufacturer's name or trade mark (5) Others

## 10.2 Marking B (KAMAYA Control label)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kamaya:](#)

[RZC63-105JTE](#) [RZC50-156JTE](#) [RZC50 106K TE](#)