



TAPE AND REEL SPECIFICATIONS:

FEED DIRECTION

1 TAPE:

REEL DIA. REF.

> .500 [12.7] DIA. HOLE THRU

±.005 [±0.13]

WIDTH

MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER ANSI/EIA-481 STANDARD

FEED DIRECTION

±.005 [±0.13]

0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0

REV.

- PITCH

 $\pm .005 [\pm 0.13]$

±.005 [±0.13]

.457 [11.60] —

.059 [1.5] DIA.

HOLE (TYP.)

.157 [4.0]

.945 [24.0] WIDE; .473 [12.00] PITCH


DESCRIPTION

2. REEL:

DATE

13.0 [330.2] DIA. 1500 PIECES OF PART NO. 3030 PER REEL.

KEYSTONE ELECTRONICS CORP. www.keyelco.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900		
PART NAME		
SM RETAINER ON TAPE		
MATERIAL		
AS NOTED		
AS NOTED	DRN BY NT	12.30.10
ASNOTED	APP'D LN	SCALE X
TOLERANCES INCH [MM] CODE	DWG NO.	
DECIMAL ± .015 [± 0.38] ANGULAR ± 1° UNLESS OTHERWISE SPECIFIED	3030TR	

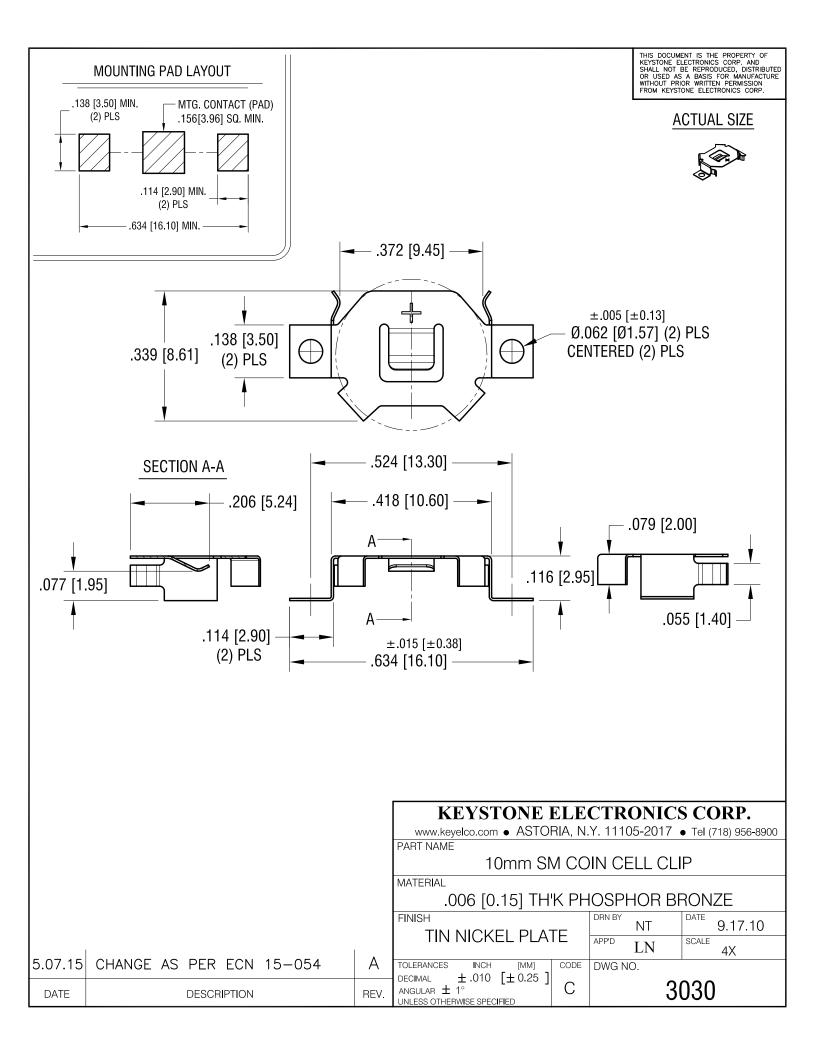

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Keystone Electronics: