

VIOLET-12X1-W

~60° wide beam

TECHNICAL SPECIFICATIONS:

Dimensions	294.8 x 41.6 mm
Height	8.8 mm
Fastening	screw
Ingress protection classes	IP66, IP67
ROHS compliant	yes ⓘ


MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
VIOLET-12X1-W	Multi-lens	Silicone	clear	
VIOLET-12X1-FRAME	Accessory	Stainless steel	metal	

ORDERING INFORMATION:

Component		Qty in box	MOQ	MPQ	Box weight (kg)
FN17818_VIOLET-12X1-W	Multi-lens	78	26	26	7.8
» Box size: 398 x 298 x 150 mm					



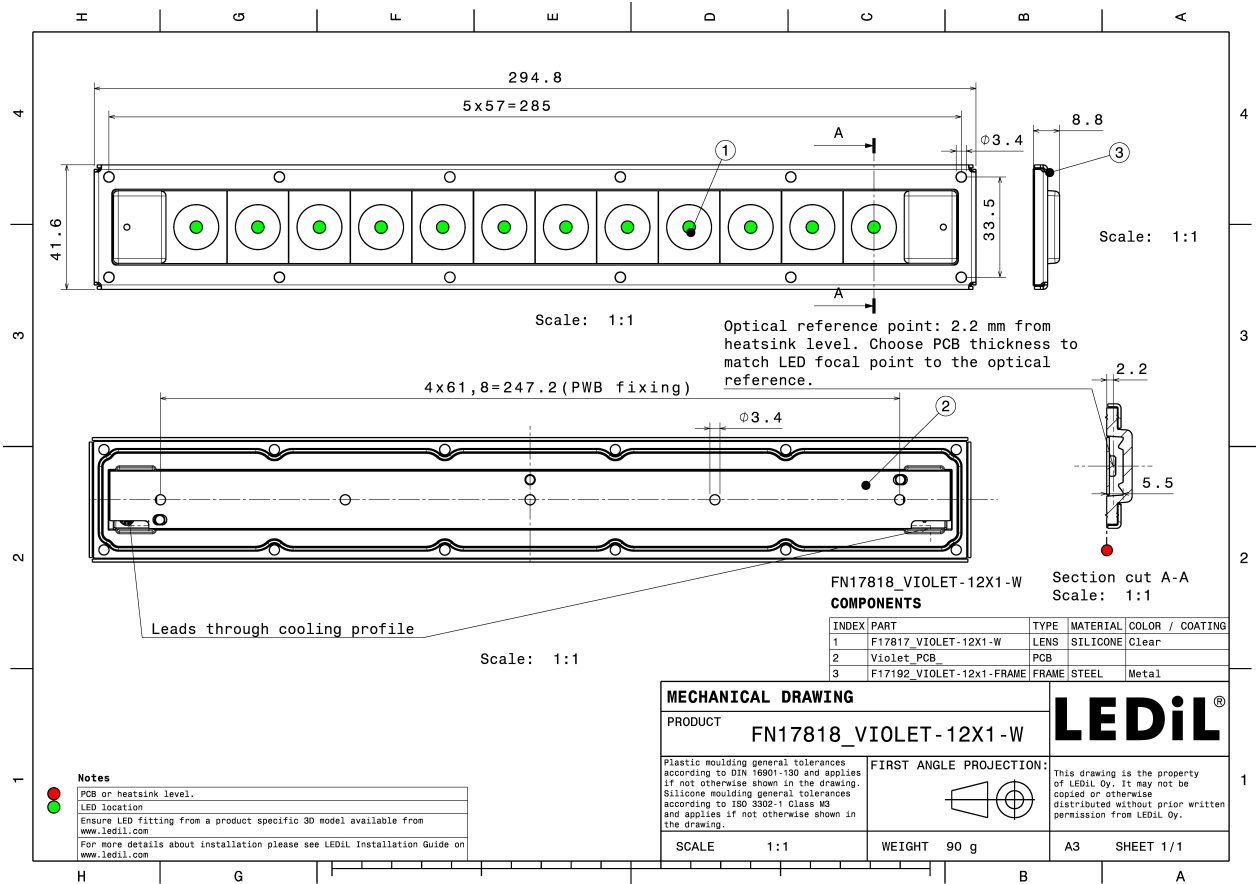

See also our general installation guide: www.ledil.com/installation_guide

PHOTOMETRIC DATA (MEASURED):



LED LIGHT ENGINE VIOLET UVC 281x19.2mm (KL265-50V-SM-WD)
FWHM / FWTM 46.0° / 67.0°
Efficiency 74 %
LEDs/each optic 1
Light colour UV-C
Required components:

The UVC LED result tolerance is ± 10 %

Crystal[®] IS

LED KL265-50V-SM-WD
FWHM / FWTM 55.0° / 73.0°
Efficiency 67 %
LEDs/each optic 1
Light colour UV-C
Required components:

The UVC LED result tolerance is ± 10 %



LED 110384-GC VIOLET
FWHM / FWTM 63.0° / 84.0°
Efficiency 74 %
LEDs/each optic 1
Light colour UV-C
Required components:

The UVC LED result tolerance is ± 10 %



LED 110384-GM VIOLET
FWHM / FWTM 64.0° / 85.0°
Efficiency 75 %
LEDs/each optic 1
Light colour UV-C
Required components:

The UVC LED result tolerance is ± 10 %

PHOTOMETRIC DATA (MEASURED):



LED LTPL-G35UV275GC-E
FWHM / FWTM 51.0° / 71.0°
Efficiency 76 %
LEDs/each optic 1
Light colour UV-C
Required components:

The UVC LED result tolerance is ± 10 %



LED LTPL-G35UV275GR-E
FWHM / FWTM 54.0° / 73.0°
Efficiency 75 %
LEDs/each optic 1
Light colour UV-C
Required components:

The UVC LED result tolerance is ± 10 %



LED LTPL-G35UVC275GH
FWHM / FWTM 55.0° / 73.0°
Efficiency 75 %
LEDs/each optic 1
Light colour UV-C
Required components:

The UVC LED result tolerance is ± 10 %



LED LTPL-G35UVC275GZ
FWHM / FWTM 53.0° / 73.0°
Efficiency 74 %
LEDs/each optic 1
Light colour UV-C
Required components:

The UVC LED result tolerance is ± 10 %

PHOTOMETRIC DATA (MEASURED):



LED XBT-3535-UV
FWHM / FWTM 56.0° / 75.0°
Efficiency 75 %
LEDs/each optic 1
Light colour UV-C
Required components:

The UVC LED result tolerance is ± 10 %



LED XFM-5050 2 Die
FWHM / FWTM 56.0° / 76.0°
Efficiency 67 %
LEDs/each optic 1
Light colour UV-C
Required components:

The UVC LED result tolerance is ± 10 %



LED XFM-5050 3 Die
FWHM / FWTM 54.0° / 77.0°
Efficiency 65 %
LEDs/each optic 1
Light colour UV-C
Required components:

The UVC LED result tolerance is ± 10 %



LED XST-3535-UV
FWHM / FWTM 37.0° / 58.0°
Efficiency 77 %
LEDs/each optic 1
Light colour UV-C
Required components:

The UVC LED result tolerance is ± 10 %

PHOTOMETRIC DATA (MEASURED):



LED NCSU334A
FWHM / FWTM 52.0° / 73.0°
Efficiency 79 %
LEDs/each optic 1
Light colour UV-C
Required components:

The UVC LED result tolerance is ± 10 %



LED NCSU334B
FWHM / FWTM 53.0° / 73.0°
Efficiency 75 %
LEDs/each optic 1
Light colour UV-C
Required components:

The UVC LED result tolerance is ± 10 %



SEOUL SEMICONDUCTOR

LED CUD7GF1B
FWHM / FWTM 48.0° / 68.0°
Efficiency 70 %
LEDs/each optic 1
Light colour UV-C
Required components:

The UVC LED result tolerance is ± 10 %



SEOUL SEMICONDUCTOR


LED CUD7QF1A
FWHM / FWTM 43.0° / 66.0°
Efficiency 69 %
LEDs/each optic 1
Light colour UV-C
Required components:

The UVC LED result tolerance is ± 10 %

PHOTOMETRIC DATA (MEASURED):

 SEOUL SEMICONDUCTOR	
LED	XMD-FBC-LLCA
FWHM / FWTM	51.0° / 72.0°
Efficiency	68 %
LEDs/each optic	1
Light colour	UV-C
Required components:	
The UVC LED result tolerance is ± 10 %	

 SEOUL SEMICONDUCTOR	
LED	XMD-FBC-LLOA
FWHM / FWTM	50.0° / 75.0°
Efficiency	73 %
LEDs/each optic	2
Light colour	UV-C
Required components:	
The UVC LED result tolerance is ± 10 %	


 SEOUL SEMICONDUCTOR	
LED	XMD-FBC-LLVA
FWHM / FWTM	53.0° / 76.0°
Efficiency	70 %
LEDs/each optic	4
Light colour	UV-C
Required components:	
The UVC LED result tolerance is ± 10 %	

PHOTOMETRIC DATA (SIMULATED):




LED XBT-1313
FWHM / FWTM 63.0° / 78.0°
Efficiency 71 %
LEDs/each optic 1
Light colour UV-C
Required components:

The UVC LED result tolerance is ± 10 %

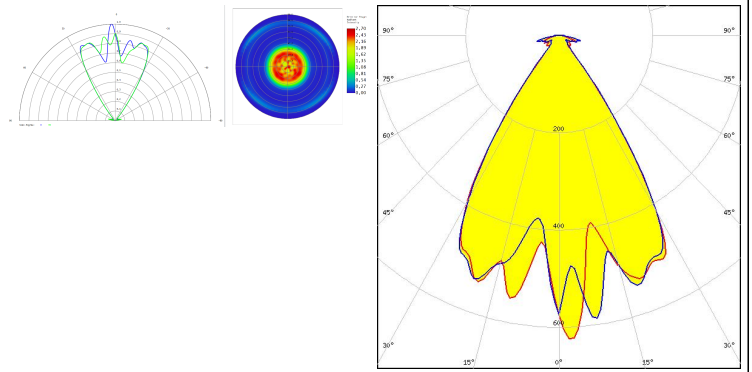


LED XBT-3535-UV
FWHM / FWTM 65.0° / 78.0°
Efficiency 80 %
LEDs/each optic 1
Light colour UV-C
Required components:

The UVC LED result tolerance is ± 10 %

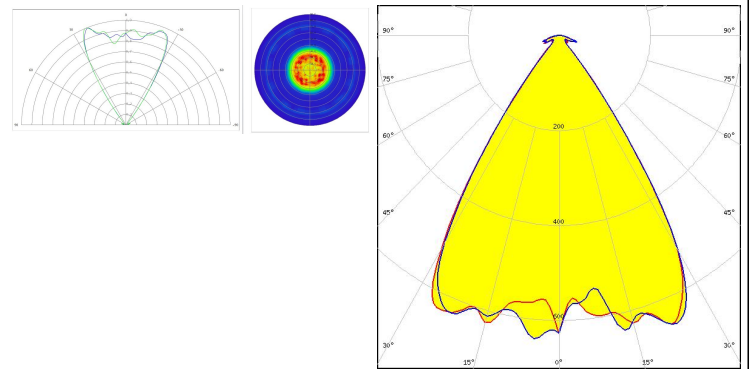


LED XFM-5050 2 Die
FWHM / FWTM 64.0° / 79.0°
Efficiency 74 %
LEDs/each optic 1
Light colour UV-C
Required components:

The UVC LED result tolerance is ± 10 %

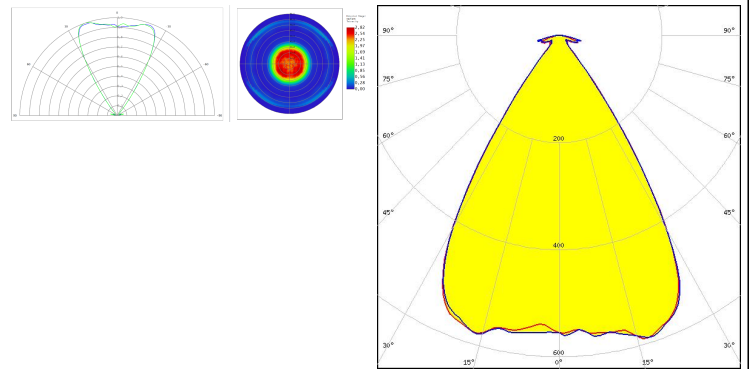

LED XFM-5050 3 Die
FWHM / FWTM 62.0° / 79.0°
Efficiency 75 %
LEDs/each optic 1
Light colour UV-C
Required components:

The UVC LED result tolerance is ± 10 %

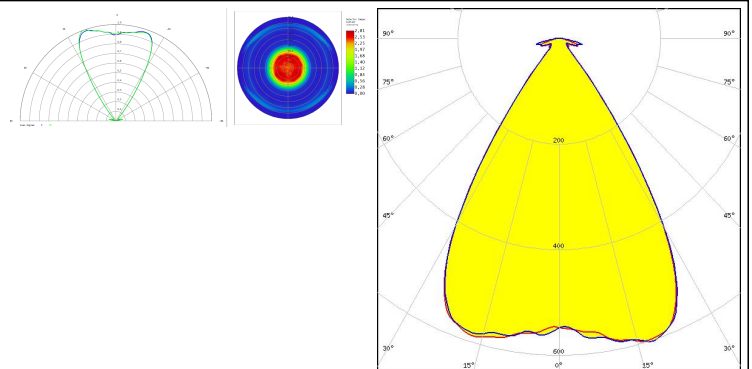


PHOTOMETRIC DATA (SIMULATED):




LED XFM-5050 4 Die
FWHM / FWTM 65.0° / 79.0°
Efficiency 76 %
LEDs/each optic 1
Light colour UV-C
Required components:

The UVC LED result tolerance is ± 10 %

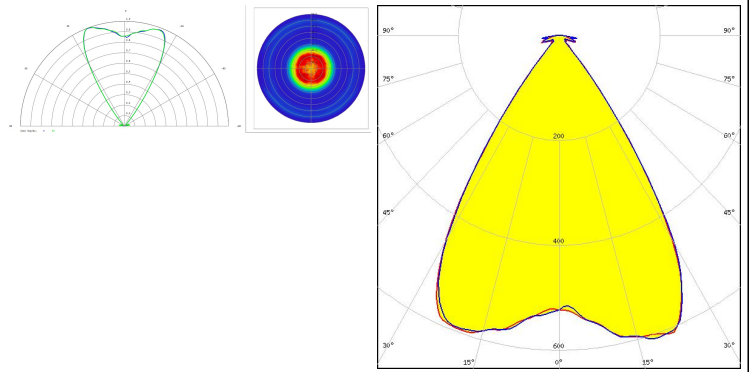


LED XST-3535-UV
FWHM / FWTM 41.0° / 62.0°
Efficiency 82 %
LEDs/each optic 1
Light colour UV-C
Required components:

The UVC LED result tolerance is ± 10 %

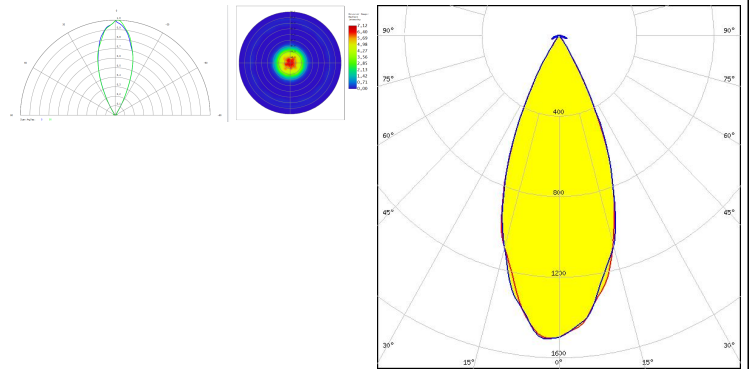


LED XST-3535-UV
FWHM / FWTM 39.0° / 58.0°
Efficiency 82 %
LEDs/each optic 1
Light colour UV-C
Required components:

The UVC LED result tolerance is ± 10 %

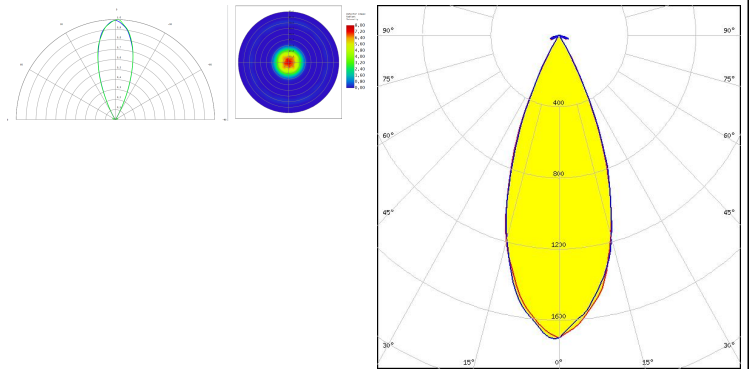

LED NCSU334B
FWHM / FWTM 62.0° / 76.0°
Efficiency 82 %
LEDs/each optic 1
Light colour UV-C
Required components:

The UVC LED result tolerance is ± 10 %



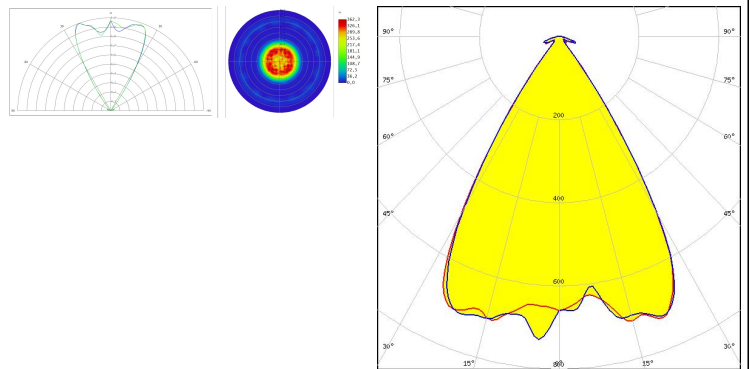


PHOTOMETRIC DATA (SIMULATED):

OSRAM
Opto Semiconductors

LED OSLON UV 6060 (SU CZHPF1.VC)
FWHM / FWTM 58.0° / 73.0°
Efficiency 66 %
LEDs/each optic 1
Light colour UV-C
Required components:




The UVC LED result tolerance is ± 10 %

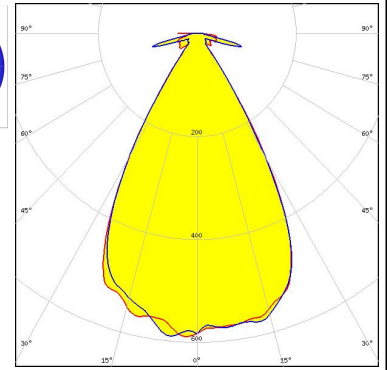

SEOUL
SEMICONDUCTOR



LED CUD7GF1B
FWHM / FWTM 65.0° / 79.0°
Efficiency 78 %
LEDs/each optic 1
Light colour UV-C
Required components:

The UVC LED result tolerance is ± 10 %

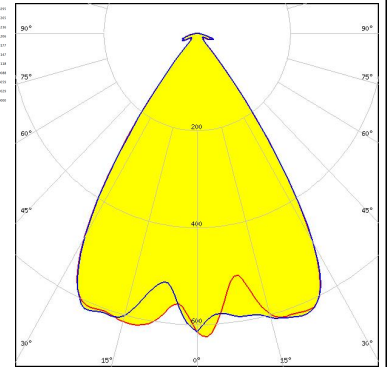



SEOUL
SEMICONDUCTOR

LED CUD8AF4D
FWHM / FWTM 71.0° / 87.0°
Efficiency 88 %
LEDs/each optic 1
Light colour UV-B
Required components:



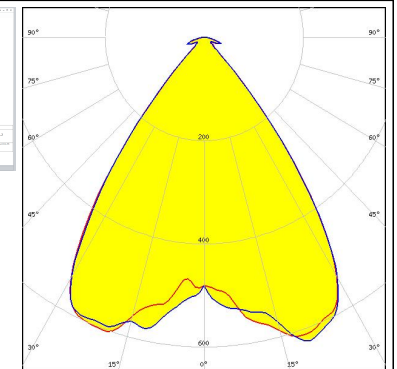
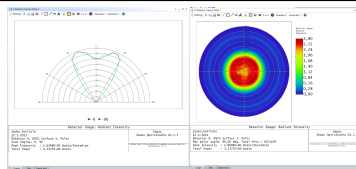


SEOUL
SEMICONDUCTOR

LED CUN66A1B
FWHM / FWTM 62.0° / 77.0°
Efficiency 89 %
LEDs/each optic 1
Light colour UV-A
Required components:

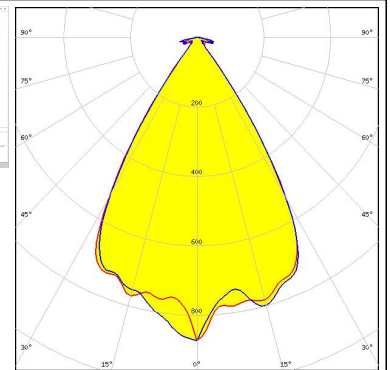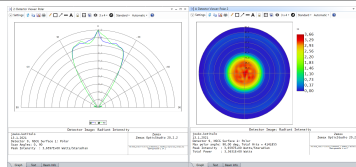

PHOTOMETRIC DATA (SIMULATED):

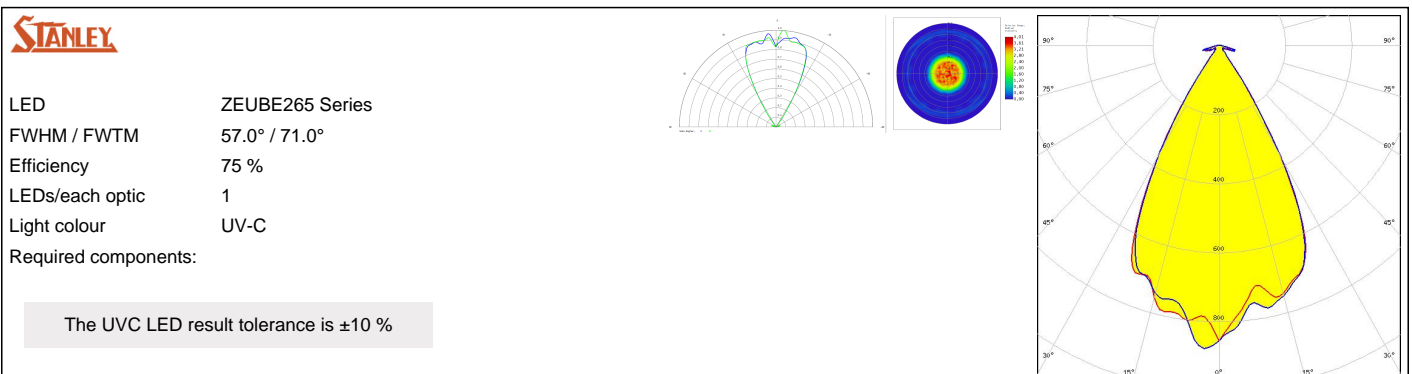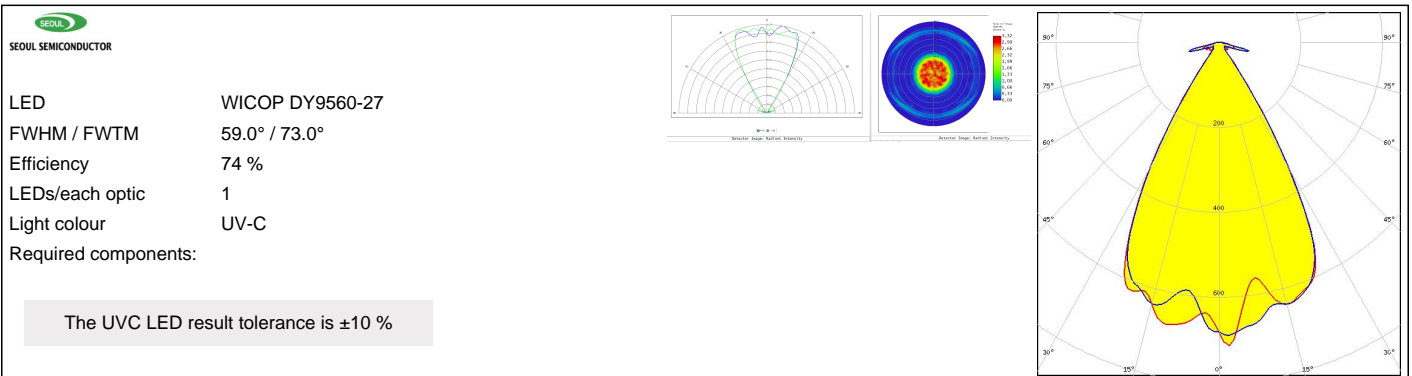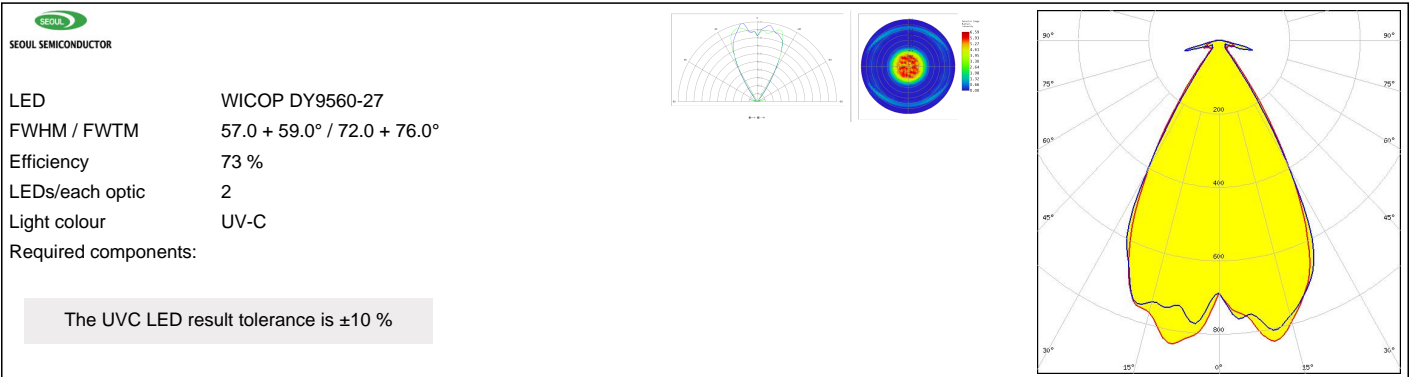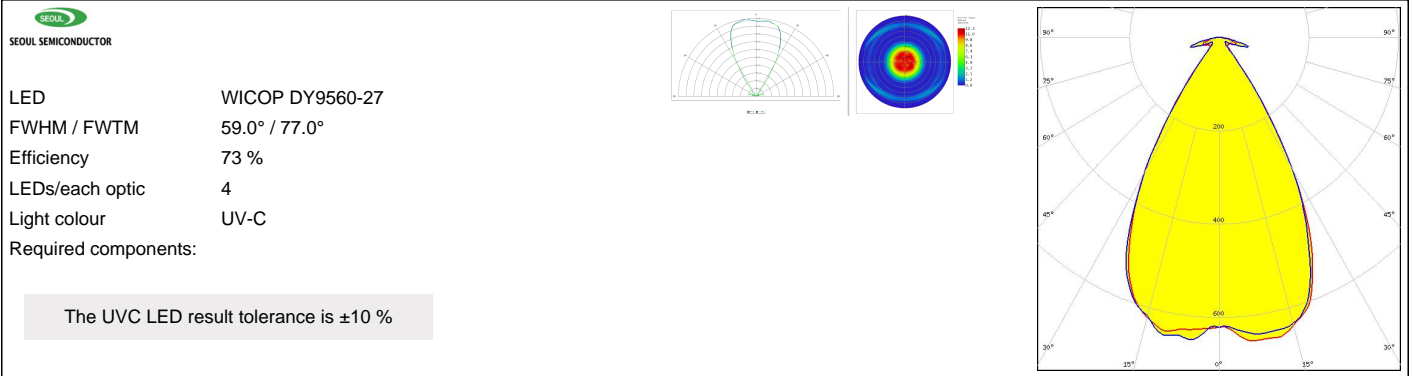

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Ledil:

[FN17818_VIOLET-12X1-W](#)