


CONTINUOUS DUTY SOLENOIDS

6-32V DC • 65-200A • Uncoated or PVC-Coated

Cole Hersee
A Littelfuse® Brand

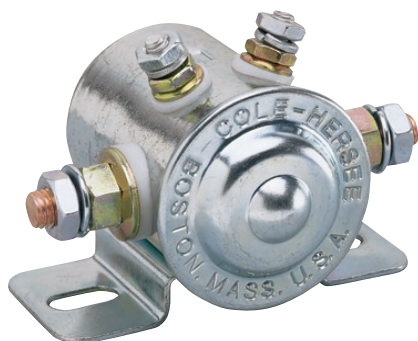

Specifications Overview

Voltage Ratings:	6, 12, 24, or 36V DC
Max Continuous Current:	65, 85, or 200A
Circuitry:	Single Pole Single Throw (SPST)
Contact Form:	Normally Open
Contact Terminals:	Copper or Silver
Operating Temp:	-40° to +85°C
Battery Terminals:	5/16 - 24 (35 in-lbs / 4.0 Nm)
Coil Studs:	10-32 (15 in-lbs / 1.7 Nm)

Description

Minimizes arcing and contact oxidation, maintains high performance. Universal use with part numbers available to handle loads up to 200A.

PVC Coated option available for a more environmentally-sealed product. Coated solenoids withstand moisture and dust to IP66.

Where vehicle vibration is a problem, we recommend the 24213-01 in which the internal windings are potted for added protection of coil leads and studs.

Web Resources

Download 2D prints and technical resources at:
littelfuse.com/solenoids


Mechanical Specifications

- SPST Normally open contacts.
- Plated steel housing. Hexnuts and washers included.
- Large (power circuit) battery studs; copper 5/16" -24 thread.
- Small (control circuit) coil studs; steel 10-32 thread.
- Bracket mounting holes 5/16 X 19/32" (7.9 X 15.1mm) on 2 13/64" centers (56.0mm).
- Available with PVC coated exterior or Potted Coil interiors for harsh environments or vibration resistance.
- Caution: Never unscrew the inner hexnuts on the studs. These keep the stud and inner wiring in place.

Ordering Information


See chart on page 2

Electrical Schematic

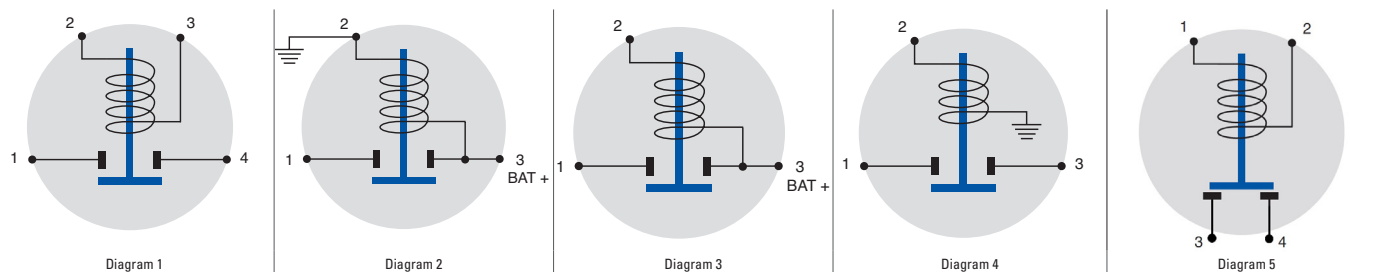

Datasheet Replaces Hotfeed Number D-500

CONTINUOUS DUTY SOLENOIDS



A



B



C



D



E

Ordering Information

PART NUMBERS			VOLTAGE	AMPS	INSULATED / GROUNDED	CIRCUITRY	FORM / CONTACTS	CONTACT MATERIAL	PVC COATED	UL LISTED	POTTED COIL	IMAGE	DIAGRAM	NOTES
BULK	BOXED	RETAIL												
24080	24080-BX	—	36	85	Insulated	SPST	NO	Copper				A	1	Intermittent rating: 125A Make, 65A Break 10 sec on, 30 min off - UL Requirement
24080-01	—	—		65	Insulated	SPST	NO	Copper		•		A	1	
24200	24200-BX	—		110	Insulated	SPST	NO	Copper				A	Refer to 2D Print	
24008	24008-BX	—		120	Insulated	SPST	NO	Copper				A		
24008-03	—	—		120	Insulated	SPST	NO	Copper				A		
24063	24063-BX	—	24	85	Insulated	SPST	NO	Silver				A	1	Special spring for stronger contact return force Components shipped unassembled
24063-08	24063-08-BX	—		85	Insulated	SPST	NO	Copper	•	•		B	1	
24214	24214-BX	—		200	Insulated	SPST	NO	Silver				A	1	
24107	24107-BX	—		85	Insulated	SPST	NO	Copper				C	2	
24124	24124-BX	—		85	Grounded	SPST	NO	Copper				C	4	
24524-10D	—	—	12	100	Insulated	SPST	NO	Copper				Refer to 2D Print	Refer to 2D Print	Intermittent rating: 750A Make, 100A Break 10 sec on, 30 min off - UL Requirement P/N, Date Code, Voltage ink stamped on surface
24037	24037-BX	—		750	Grounded	SPST	NO	Copper				C	4	
24044	24044-BX	—		750	Grounded	SPST	NO	Copper				D	4	
24047	24047-BX	—		750	Insulated	SPST	NO	Copper				A	1	
24059	24059-BX	24059-BP		85	Insulated	SPST	NO	Copper				A	1	
24059-08	24059-08-BX	24059-08-BP	6	65	Insulated	SPST	NO	Copper		•		A	1	Intermittent rating: 750A Make, 100A Break 10 sec on, 30 min off - UL Requirement P/N, Date Code, Voltage ink stamped on surface
24106-07	—	—		85	Grounded	SPST	NO	Copper				C	4	
24115	24115-BX	—		85	Insulated	SPST	NO	Copper				C	3	
24117	24117-BX	—			Insulated	SPST	NO	Copper	•			B	1	
24117-01	24117-01-BX	24117-01-BP			Insulated	SPST	NO	Copper	•			B	1	
24213	24213-BX	24213-BP	200	200	Insulated	SPST	NO	Silver				A	1	IP66 Black PVC Coating • IP66
24213-01	—	—		200	Insulated	SPST	NO	Silver			•	B	1	
24213-03	—	—		200	Insulated	SPST	NO	Silver	•			B	1	
24106	24106-BX	—		85	Grounded	SPST	NO	Copper				C	4	
24082	24082-BX	—		85	Grounded	SPST	NO	Copper				D	4	
24420	24420-BX	24420-BP	35	35	Insulated	SPST	NO	Copper	•	•		E	5	Curved Bracket
24097	24097-BX	—		85	Insulated	SPST	NO	Copper				A	1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Littelfuse:

[24063](#) [24213](#) [24213-03](#) [24214](#) [24106](#) [24117](#) [24059](#) [24063-08](#) [24117-01](#) [24107](#) [24124](#) [24115](#) [24059-08](#)
[24080](#) [24082](#) [24213-01](#) [24097](#) [24420](#)