

UNCONTROLLED DOCUMENT

PART NUMBER SSB-LX2400SYW

REV.	E.C.N.	NUMBER AN	D REVISION	COMMENTS	DATE
Α	F.C.N.	#10978.			4,11,03

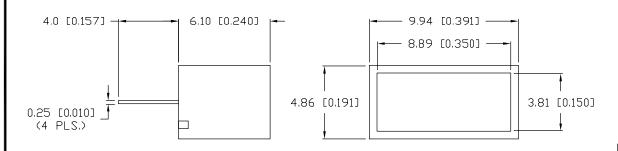

	ELECTRO-OPTICAL C	HARACTERIST	ICS TA=25	o'C	If = 20mA	
	PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
	PEAK WAVELENGTH		590		nm	
	FORWARD VOLTAGE		2.0	2.5	٧f	
	REVERSE VOLTAGE	5.0			V_r	I _r =100µA
Α	AXIAL INTENSITY		200		mcd	$I_f = 20 \text{mA}$
	VIEWING ANGLE		160		2x theta	
	EMITTED COLOR:	YELLOW				
	EPOXY LENS FINISH:	: MILKY WH	ITE DIFFUS	SED		

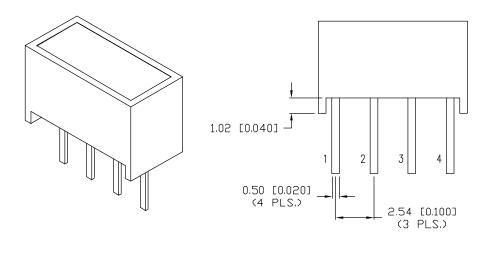

LIMITS OF SAFE OPERATION AT 25°C PER LED

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	-1.2	mW/°C
OPERATING, STORAGE TEMP.	- 40 TO +85	°C
SOLDERING TEMP.	+ 260	° C
2.0mm FROM BODY		3 SEC. MAX

* t<10uS

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN=+DECIMAL PRECISION MAX.= +0.00 -0.0

PART NUMBER REV. SSB-LX2400SYW

> 8.89mm x 3.81mm VIEWING AREA LIGHT BAR, TWO 590nm YELLOW LEDS, MILKY WHITE DIFFUSED.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY: BC

CHECKED BY: APPROVED BY: DATE:

4.8.93 PAGE: 1 OF 1 SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSB-LX2400SYW