



E502650

Features

- Glass Passivated Die Construction
- High Surge Current Capability
- Lead Free Finish/Rohs Compliant (Note1) ("P" Suffix Designates Compliant. See Ordering Information)
- Epoxy Meets UL 94 V-0 Flammability Rating
- Vacuum Soldering Process Minimize The Solder Voids, Typical Voids Are 2% And Max Voids Less Than 8%

Maximum Ratings

- Operating Junction Temperature Range: -55°C to +150°C
- Storage Temperature Range: -55°C to +150°C
- Maximum Thermal Resistance: 1.3°C/W Junction to Case
- Typical Thermal Resistance: 0.85°C/W Junction to Case

Mechanical Data

- Mounting Torque: 2 N·m Maximum

| MCC Part Number | Device Marking | Maximum Recurrent Peak Reverse Voltage | Maximum RMS Voltage | Maximum DC Blocking Voltage |
|-----------------|----------------|--|---------------------|-----------------------------|
| MT3504A | MT3504A | 400V | 280V | 400V |
| MT3506A | MT3506A | 600V | 420V | 600V |
| MT3508A | MT3508A | 800V | 560V | 800V |
| MT3510A | MT3510A | 1000V | 700V | 1000V |
| MT3512A | MT3512A | 1200V | 840V | 1200V |
| MT3514A | MT3514A | 1400V | 980V | 1400V |
| MT3516A | MT3516A | 1600V | 1120V | 1600V |


Electrical Characteristics @ 25°C Unless Otherwise Specified

| | | | |
|--------------------------------------|-------------|---------------------|--|
| Average Forward Current | $I_{F(AV)}$ | 35A | $T_C = 55^\circ\text{C}$ |
| Forward Surge Current(Nonrepetitive) | I_{FSM} | 400A | 60Hz Sine Wave, 1 Cycle, |
| Peak Forward Voltage | V_{FM} | 1.2V | $I_{FM}=17.5\text{A}$, Pulse Measurement, Rating of Per Diode |
| Peak Reverse Current | I_{RRM} | 10 μA | Pulse Measurement Rating of Per Diode |
| Current Squared Time | I^2t | 660A ² S | 1ms< t < 8.3ms Rating of Per Diode |
| Dielectric Strength | V_{dis} | 2.5KV | AC 1min, Terminals to Case |

Note: 1. High Temperature Solder Exemption Applied, See EU Directive Annex Notes 7a

35 Amp Three Phases Bridge Rectifier 400 to 1600 Volts

MT-35A

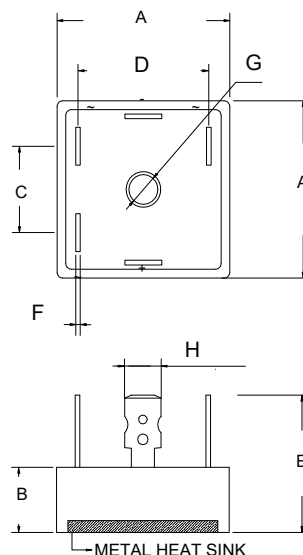

| DIM | INCHES | | MM | | NOTE |
|-----|--------|-------|-------|-------|------|
| | MIN | MAX | MIN | MAX | |
| A | 1.110 | 1.134 | 28.20 | 28.80 | |
| B | 0.354 | 0.394 | 9.00 | 10.00 | |
| C | 0.610 | 0.650 | 15.50 | 16.50 | |
| D | 0.917 | 0.957 | 23.30 | 24.30 | |
| E | 0.944 | | 25.00 | | TYP. |
| F | 0.029 | 0.033 | 0.75 | 0.85 | |
| G | 0.193 | | 4.90 | | TYP. |
| H | 0.244 | 0.251 | 6.20 | 6.40 | |

Curve Characteristics

Fig. 1 - Forward Current Derating Curve

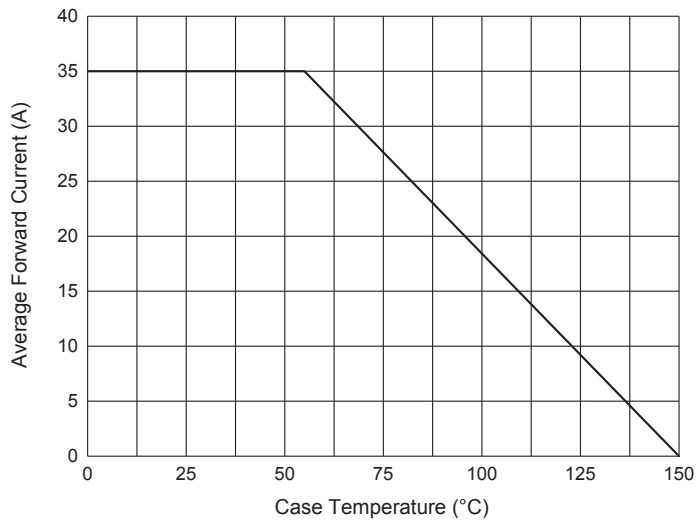


Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current

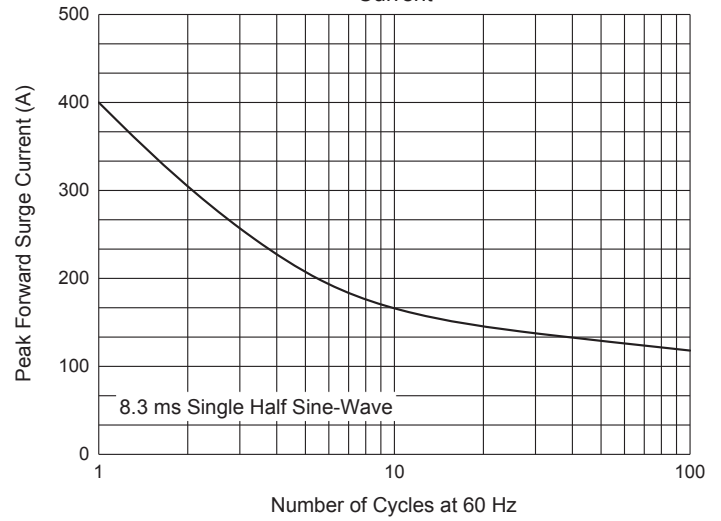


Fig. 3 - Typical Instantaneous Forward Characteristics


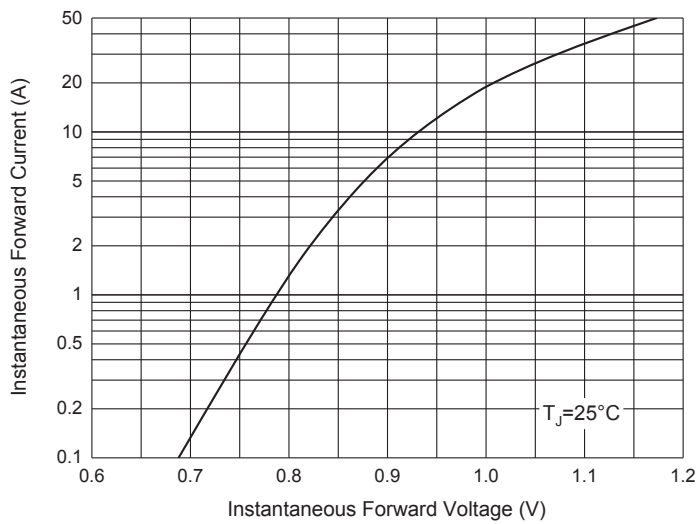


Fig. 4 - Typical Reverse Leakage Characteristics

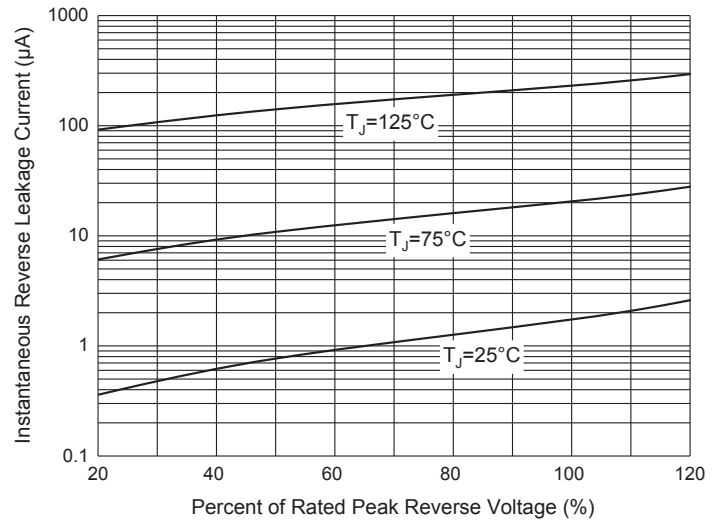

Ordering Information

| Device | Packing |
|----------------|----------------------------|
| Part Number-BP | Bulk: 50PCS/BOX:400PCS/CTN |

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages. **Micro Commercial Components Corp.** products are sold subject to the general terms and conditions of commercial sale, as published at <https://www.mccsemi.com/Home/TermsAndConditions>.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Micro Commercial Components \(MCC\):](#)

[MT3516A-BP](#) [MT3508A-BP](#) [MT3512A-BP](#) [MT3516A-BP-B002](#)