

# PD-9501GR/SP Midspan


Single-port, 60W Gigabit Midspan, 4-Pairs, 802.3at Compliant with Surge Protection

## Key Features

- IEEE 802.3at compliant with 2-event classification
- IEEE 802.3af backward compatible
- Output power of 60W over 4-pairs is guaranteed
- Supports 10/100/1000Base-T applications
- Plug-and-play installation
- Safe: low power devices receive only the power they need
- Automatic detection and protection of non-standard Ethernet terminals
- Compact design fits easily in WLAN access point and IP camera installations

## Overview

Microsemi's PD-9501GR/SP is a single port solution for remote powering of current as well as emerging high power applications. The PD-9501GR/SP provides Surge Protection functionality optimal for the installation of outdoor PDs. The PD-9501GR/SP is designed specifically to power IEEE 802.11n and IEEE 802.3at access points, pan-tilt-zoom (PTZ) and dome cameras, IP videophones, thin clients and other high power Ethernet end terminals with 60W of power, and is also backward compatible and safe to use with any IEEE 802.3af terminal such as VoIP phones, IP cameras and wireless LAN access points. It can power both existing 10/100Base-T devices and emerging wireless 1000Base-T devices such as Wi-MAX and wireless IEEE 802.11n access points. The PD-9501GR/SP provides power on all 4-pairs while being backwards compatible to 802.3af and 802.3at powered devices.

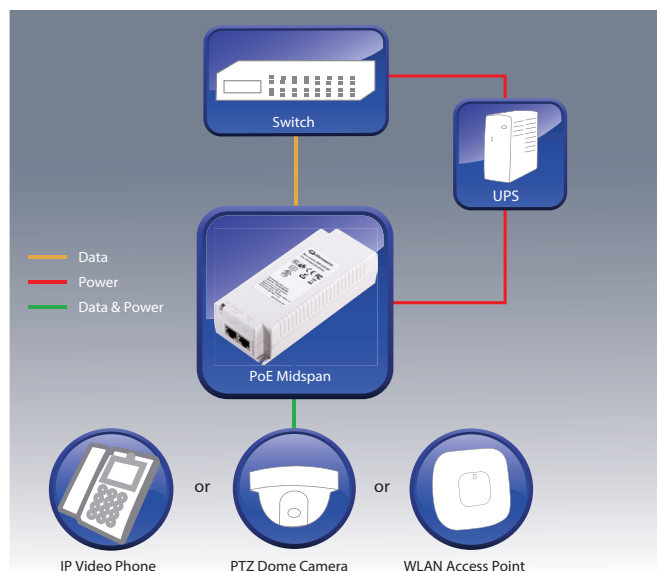

**Figure 1:** PD-9501GR/SP


## Specifications

Feature	Description
No. of Ports	1
Data Rates	10/100/1000 Mbps
Power over Ethernet Output	Pin Assignment and Polarity: Data Pairs 1/2 (-) and 3/6 (+) Spare Pairs 7/8 (-) and 4/5 (+) Output Power Voltage: 55 VDC User Port Power: 60 W over 4-pairs (Guaranteed)
Input Power Requirements	AC Input Voltage: 100 to 240 VAC AC Input Current: 1.5 A @100-240 VAC AC Frequency: 50 to 60 Hz
Dimensions	62 mm (W) x 38 mm (H) x 151 mm (L) 2.44 in. x 1.5 in. x 5.94 in
Weight	Bare unit: 0.75 lbs (340 g)
Indicators	AC Power (Yellow) Channel Power (Green)
Connectors	Shielded RJ-45, EIA 568A and 568B
Environmental Conditions	Operating Ambient Temperature: 14° to 104° F (-10° C to 40° C) @ 60 W 14° to 131° F (-10° C to 50° C) @ 30 W Operating Humidity: Maximum 90%, Non-condensing Storage Temperature: -4° to 158°F (-20° to 70° C) Storage Humidity: Maximum 95%, Non-condensing
Reliability	MTBF: 240, 000 hrs. @ 25° C
Thermal Rating	30 BTU/Hr (@ 100 VAC)
Warranty	1-year
Regulatory	IEEE 802.3at (PoE), RoHS Compliant, WEEE Compliant, CE
Electromagnetic Emission & Immunity	FCC Part 15, Class B EN 55022 Class B (Emissions) EN 55024 (Immunity), VCCI
Surge Protection	EN 61000-4-5 (10/700 µsec, 4 KV) Meets Surge Protection as specified in: IEC-61643-21 GR-1089-CORE lightning protection demands ITU-T K.45 International standard
Safety Approvals	UL/cUL Per EN 60950-1 GS Mark Per EN 60950-1

# PD-9501GR/SP Midspan

Single-port, 60W Gigabit Midspan, 4-Pairs, 802.3at Compliant with Surge Protection

## Performance Data

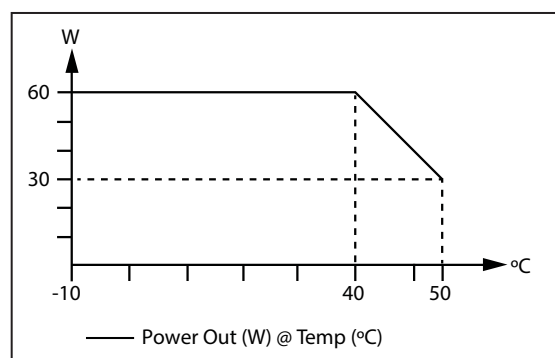

**Figure 2:** Performance Data

## Ordering Information

Part Number	Name	Description
PD-9501GR/SP	Microsemi PD-9501GR/SP	1-port, IEEE 802.3at 4-Pairs, Gigabit Midspan with surge protection

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.



Microsemi Corporate Headquarters  
 One Enterprise, Aliso Viejo, CA 92656 USA  
 Within the USA: +1 (800) 713-4113  
 Outside the USA: +1 (949) 380-6100  
 Sales: +1 (949) 380-6136  
 Fax: +1 (949) 215-4996  
 email: sales.support@microsemi.com  
 www.microsemi.com

Microsemi Corporation (MSCC) offers a comprehensive portfolio of semiconductor and system solutions for communications, defense & security, aerospace and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; security technologies and scalable anti-tamper products; Ethernet solutions; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, Calif., and has approximately 3,600 employees globally. Learn more at [www.microsemi.com](http://www.microsemi.com).

©2015 Microsemi Corporation. All rights reserved. Microsemi and the Microsemi logo are registered trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Microchip:](#)

[PD-9501GR/SP/AC-AU](#) [PD-9501GR/SP/AC-EU](#) [PD-9501GR/SP/AC-JP](#) [PD-9501GR/SP/AC-UK](#) [PD-9501GR/SP/AC-](#)  
[US](#)