

APPLICATIONS



- Battery-powered devices
- High switching frequency SMPS
- IoT
- Wearable
- Portable devices
- Input filters

FEATURES

- Size 2.0mmx1.6mmx1.0mm
- Low Profile
- Low Audible Noise
- Molded Construction
- Soft Saturation
- Stable Over High Temperatures
- Low DCR
- Max Operating Temp +125°C
- RoHS/REACH-Compliant, Halogen-Free

ELECTRICAL CHARACTERISTICS


Parameter			Value	Unit
Inductance ⁽¹⁾	<i>L</i>	±20%	2.2	μH
Resistance	<i>R_{DC}</i>	Typ	125	mΩ
Resistance _{MAX}	<i>R_{DC MAX}</i>	Max	150	mΩ
Rated Current ⁽²⁾	<i>I_R</i>	Typ	2.0	A
Saturation Current 25°C ⁽³⁾	<i>I_{SAT 25°C}</i>	Typ	2.6	A
Saturation Current 100°C ⁽⁴⁾	<i>I_{SAT 100°C}</i>	Typ	2.6	A
Resonance Frequency	<i>f_r</i>	Typ	53	MHz

GENERAL SPECIFICATIONS


⁽¹⁾ Inductance	Measured at 100kHz, 100mA
⁽²⁾ Rated Current	Rated current will cause the coil temperature rise ΔT of 40K <i>I_R measured with the inductor soldered in a single-layer PCB. Copper layer thickness 35μm Cu / PCB size 30x50mm. Temperature behavior dependent on circuit design, PCB layout, proximity to other components, and trace dimensions and thickness.</i>
⁽³⁾ Saturation Current 25°C	Saturation current will cause L to drop from 30% at 25°C ambient temperature
⁽⁴⁾ Saturation Current 100°C	Saturation current will cause L to drop from 30% at 100°C ambient temperature
Temperature Test Condition	Electrical specifications measured at 25°C, 35% RH if not given differently
Operating Condition	Operating temperature: -40°C to +125°C (including temp rise) Should not exceed +125°C under worst-case operation conditions
Storage Condition	Tape and Reel packaging: -10°C to +40°C Humidity: <50% RH

TYPICAL PERFORMANCE CURVES


Temperature Rise vs. Current

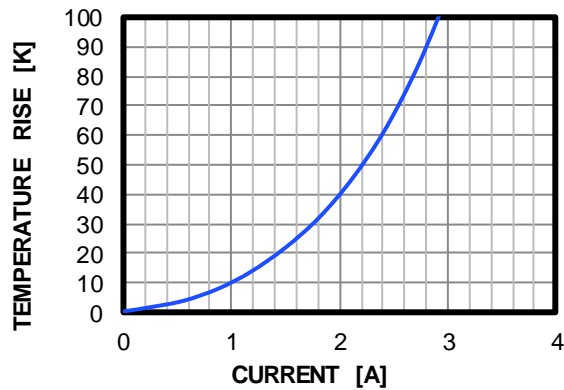


Inductance vs. Current

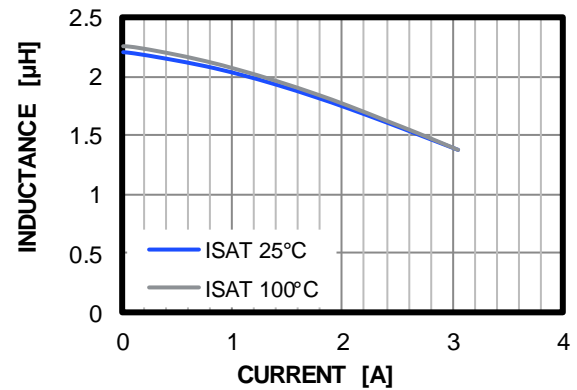


Impedance vs. Frequency

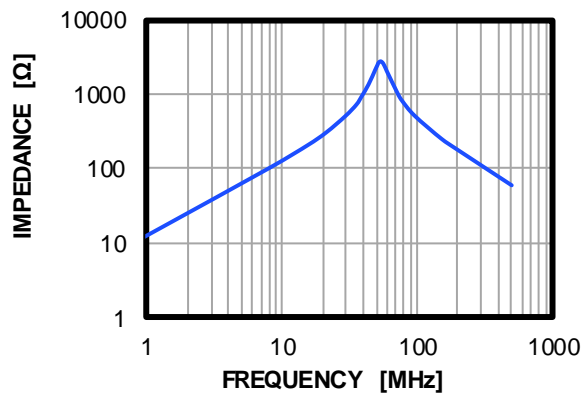


Inductance vs. Frequency

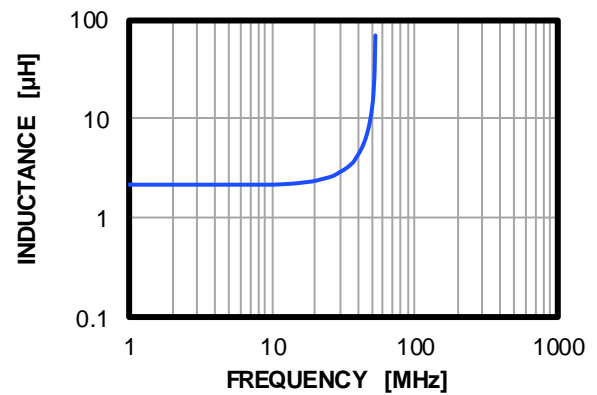

Quality Factor vs. Frequency

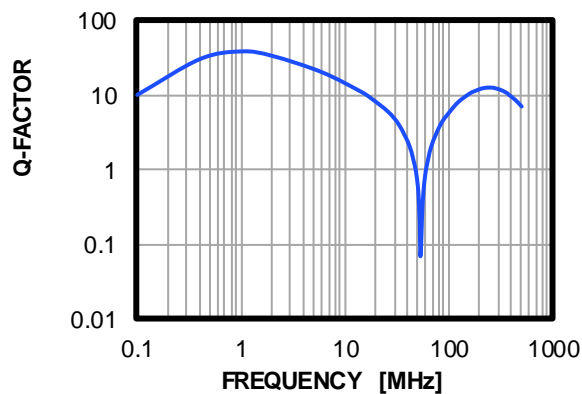


AC Resistance vs. Frequency

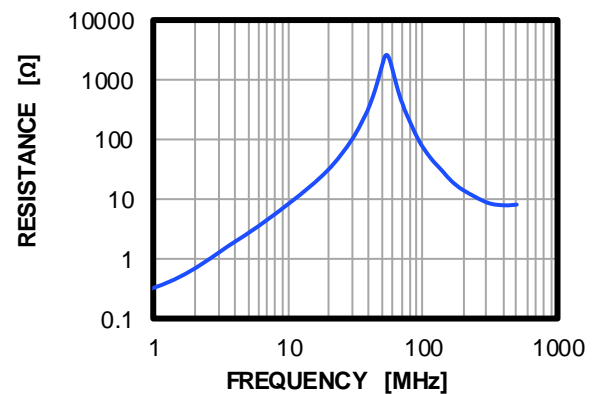


DIMENSIONS

PRODUCT PACKAGE

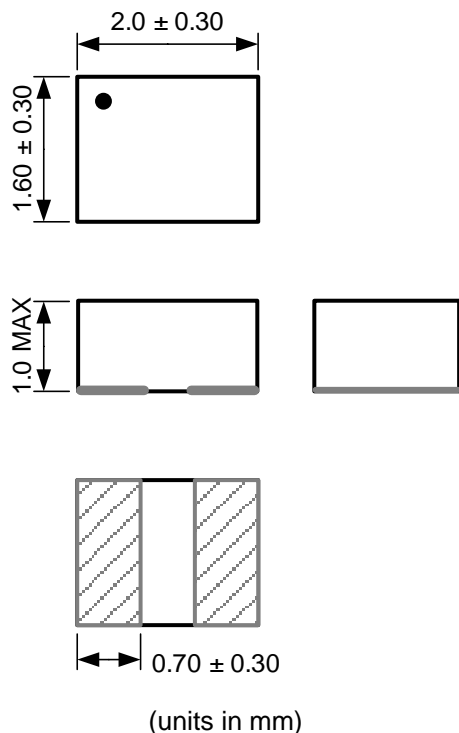

RECOMMENDED LAND PATTERN

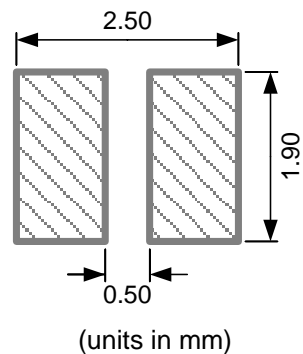

TOP MARKING

Marking

Start of Winding . (dot)

ORDERING INFORMATION

Part Number	$L^{(1)}$ ±20% (μH)	R_{DC} Typ (mΩ)	$I_R^{(2)}$ Typ (A)	$I_{SAT\ 25^\circ C}^{(3)}$ Typ (A)	$I_{SAT\ 100^\circ C}^{(4)}$ Typ (A)
MPL-AT2010-R47	0.47	27	4.5	5.7	5.7
MPL-AT2010-R68	0.68	41	3.6	4.9	4.9
MPL-AT2010-1R0	1.0	50	3.3	4.2	4.2
MPL-AT2010-1R5	1.5	85	2.4	3.2	3.2
MPL-AT2010-2R2	2.2	125	2.0	2.6	2.6
MPL-AT2010-4R7	4.7	215	1.5	1.9	1.9

GENERAL SPECIFICATIONS

(1) Inductance	Measured at 100kHz, 100mA
(2) Rated Current	Rated current will cause the coil temperature rise ΔT of 40K <i>I_R measured with the inductor soldered in a single-layer PCB. Copper layer thickness 35μm Cu / PCB size 30x50mm. Temperature behavior dependent on circuit design, PCB layout, proximity to other components, and trace dimensions and thickness.</i>
(3) Saturation Current $_{25^\circ C}$	Saturation current will cause L to drop from 30% at 25°C ambient temperature
(4) Saturation Current $_{100^\circ C}$	Saturation current will cause L to drop from 30% at 100°C ambient temperature
Temperature Test Condition	Electrical specifications measured at 25°C, 35% RH if not given differently
Operating Condition	Operating temperature: -40°C to +125°C (including temp rise) Should not exceed +125°C under worst-case operation conditions
Storage Condition	Tape and Reel packaging: -10°C to +40°C Humidity: <50% RH

REVISION HISTORY

Revision #	Revision Date	Description	Pages Updated
1.0	7/11/2019	Initial Release	-
1.1	7/29/2019	Updated Impedance vs. Frequency Curve	2
1.2	7/7/2023	Updated the R_{DC} (Typ), $R_{DC\ MAX}$, I_R (Typ), $I_{SAT\ 25^{\circ}C}$ (Typ) and $I_{SAT\ 100^{\circ}C}$ (Typ) values, and made minor formatting edits in the Electrical Characteristics section	1
		Updated all the Typical Performance Curves	2
		Reordered the Dimensions section; updated the Product Package and Recommended Land Pattern images	3
		Updated the following values in the Ordering Information section: <ul style="list-style-type: none"> • MPL-AT2010-R47: Updated I_R (Typ) • MPL-AT2010-R68: Updated I_R (Typ) • MPL-AT2010-1R0: Updated I_R (Typ) • MPL-AT2010-1R5: Updated R_{DC} (Typ) • MPL-AT2010-2R2: Updated R_{DC} (Typ), I_R (Typ), $I_{SAT\ 25^{\circ}C}$ (Typ), and $I_{SAT\ 100^{\circ}C}$ (Typ) 	4

Notice: The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third-party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Monolithic Power Systems \(MPS\):](#)

[MPL-AT2010-2R2](#)