

DATA SHEET



SCA830-D07 1-AXIS INCLINOMETER WITH DIGITAL SPI INTERFACE

Features

- 3.3 V supply voltage
- ± 1 g measurement range
- Single axis measurement in Y direction
- ± 30 mg offset accuracy over temp range
- SPI digital interface
- Extensive self-diagnostics features
- Size 7.6 x 3.3 x 8.6 mm (w x h x l)
- Qualified according to AEC-Q100 standard
- Package, pin-out and SPI protocol compatible with Murata's digital accelerometer product family
- RoHS compliant Dual Flat Lead (DFL) plastic package suitable for lead free soldering process and SMD mounting
- Proven capacitive 3D-MEMS technology
- High resolution 16-bit A/D converter

Applications

The SCA830-D07 is targeted to applications with high stability requirements. Typical applications include

- Hill Start Aid (HSA)
- Electronic Parking Brake (EPB)
- Roll Over detection
- Suspension control
- Inclinerometers
- Motion and position measurements

General Description

The SCA830-D07 is a single axis inclinometer component based on Murata's capacitive 3D-MEMS technology. The component integrates high accuracy micromechanical acceleration sensing together with a flexible SPI digital interface. Dual Flat Lead (DFL) housing guarantees reliable operation over product lifetime.

The SCA830-D07 is designed, manufactured and tested for high stability, reliability and quality requirements of automotive applications. The inclinometer has an extremely stable output over wide ranges of temperature, humidity and mechanical noise. The component is qualified to the AEC-Q100 standard and has several advanced self-diagnostics features. The DFL housing is suitable for SMD mounting and the component is compatible with the RoHS and ELV directives.

The SCA830-D07 is a part of Murata's digital accelerometer family and fully compatible with its single axis accelerometers (SCA800 Series) and other multi axis accelerometers (SCA2100 Series and SCA3100 Series).

Performance Characteristics

Vdd = 3.3 V and ambient temperature unless otherwise specified.

Table 1. Performance characteristics of SCA830-D07

Parameter	Condition				Units
		Min	Typ ¹⁾	Max	
Analog and digital Vdd		3.0		3.6	V
Current consumption	Active mode		5	6.3	mA
	Power down mode			0.1	mA
Measurement range	Measurement axis (Y)	-1		1	g
		-90		+90	°
Operating temperature		-40		125	°C
Total offset error ²⁾	Temperature range -40 ... +125 °C	-70		+70	mg
Offset stability ³⁾	Temperature range -40 ... +125 °C	-25		25	mg
		-1.5		1.5	°
Offset calibration error ⁴⁾	@25°C		±20		mg
Offset temperature drift	Temperature range -40 ... +125 °C		±1.1		°
	Temperature range -20 ... +85 °C		±13 ⁶⁾	30 ⁵⁾	mg
Sensitivity	16 bit output between ±3°		±0.85		°
			32 000		Count/g
Total sensitivity error	Temperature range -40 ... +125 °C	-4		4	%/Count
Sensitivity calibration error	@25 °C ±5°C		±1.4		% FS
Sensitivity temperature drift	Temperature range -40 ... +125 °C		±0.9		% FS
Linearity error	+1g ... -1g range	-20		20	mg
Cross-Axis sensitivity			±2	±3.5	%
Zero acceleration output	2-complement		0		Counts
Amplitude response	-3dB frequency		6.25		Hz
Noise			0.15		mg RMS
Power on setup time				0.3	s
Output data rate			125		Hz
Output load				50	pF
SPI clock rate				8	MHz
ESD protection	Human Body Model			2	kV
	Charge Device Model			1	kV
Moisture sensitivity level	IPC/JEDEC J-STD-020C, Level 3				
Mechanical shock				20 000	g
ID register value	Customer readable ID register (27hex)		0A		

1) Typical ± values are ±3 sigma variation limits from validation test population.

2) Includes offset deviation from 0 g value including calibration error and drift over lifetime, temperature and supply voltage.

3) **After mounting of the ECU to the application and after offset zero-setting at room temperature. Relevant offset failure due to temperature dependency of offset as well as aging over lifetime**

4) Includes offset deviation from 0g value including calibration error and drift over lifetime.

5) Offset drift due to temperature. Value is a relative value and has been centered to zero. Error defined as maximum change of offset in temperature range. Offset (max) - Offset (min). 100% tested in production.

6) Biggest Change of output from RT value due temperature.






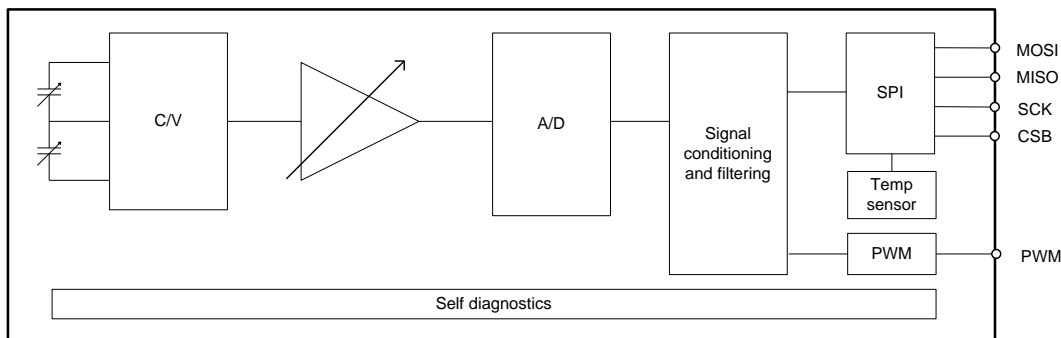


Figure 1. SCA830-D07 Block diagram

Typical Performance characteristics

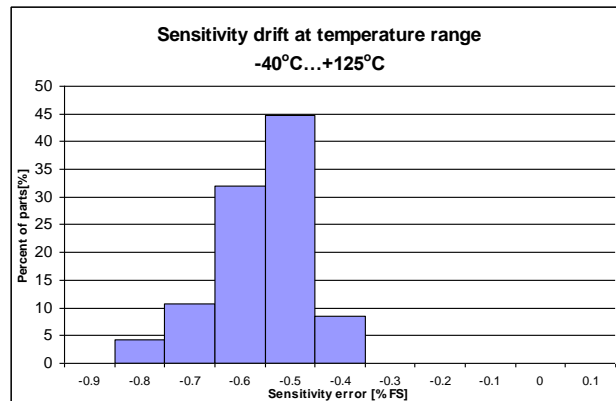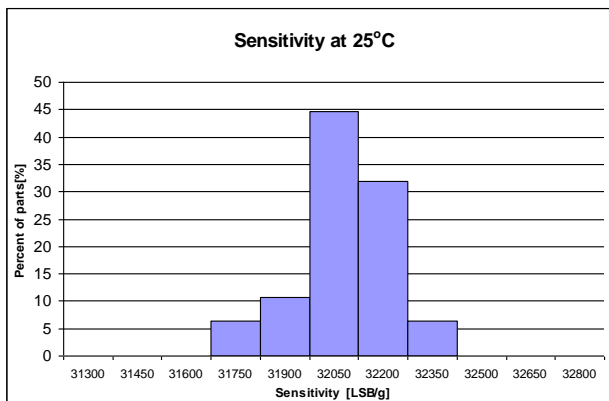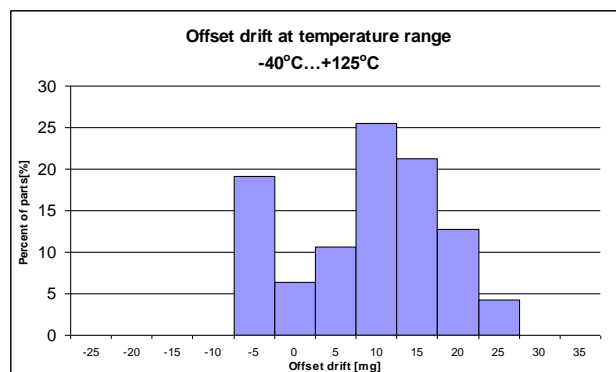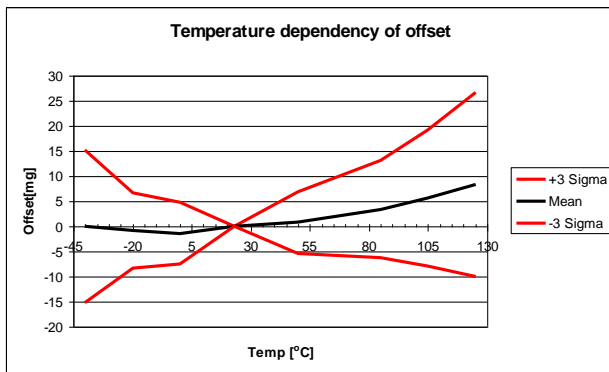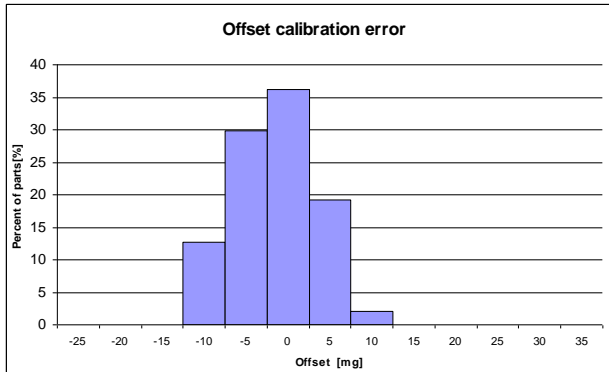

Pin Description

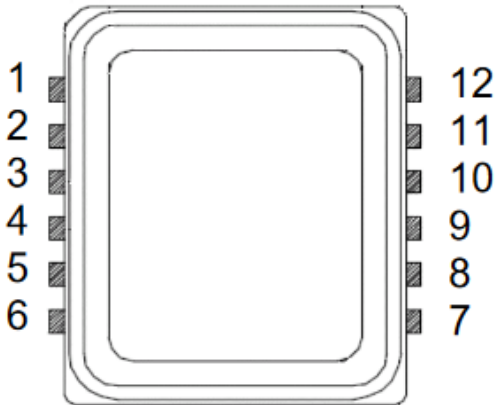


Figure 1. Component pinout

Table 2. Component pinout

No.	Name	Type ¹⁾	PD/PU ²⁾	Function	Connect
1	Reserved			Not used	Gnd
2	Reserved		PD	Factory use	Gnd
3	AVSS	AI		Negative power supply (analog)	Gnd
4	AVDD	AI		Positive power supply (analog)	Vdd
5	CSB	DI	PU	Chip select	CSB
6	MISO	ZO		Data output	MISO
7	SCK	DI	PD	Serial clock	SCK
8	MOSI	DI	PD	Data input	MOSI
9	Reserved	ADO		Pulse width modulation output	PWM
10	DVDD	AI		Positive power supply (digital)	Vdd
11	DVSS	AI		Negative power supply (digital)	Gnd
12	EGnd	AI		EMC ground	Gnd

- 1) A = Analog, D = Digital, I = Input, O = Output, Z = Tristate Output
- 2) PU = internal pullup, PD = internal pulldown
- 3) PWM pin is driven to '0' after start-up when PWM is disabled. During the mass deflection self-test (STE) PWM pin goes to '1' and returns to '0' when STE is completed. In case of STE failure PWM output will stay at '1'

Further description of recommended circuit diagram and PWB layout can be found from company website.
Documentation: **SCA8X0 21X0 3100 Product Family Specification**

Measurement Directions

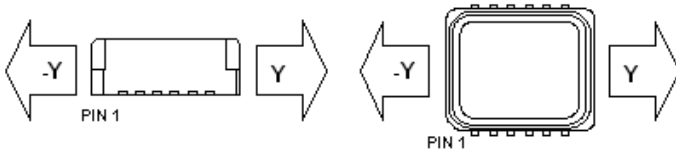


Figure 3. Accelerometer measuring directions

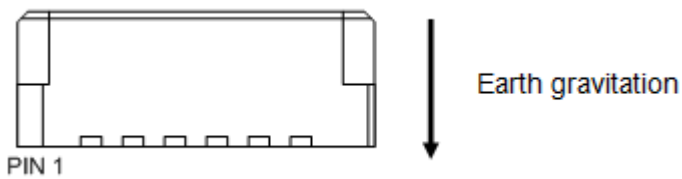


Figure 2. Zero acceleration output position

Housing Dimensions

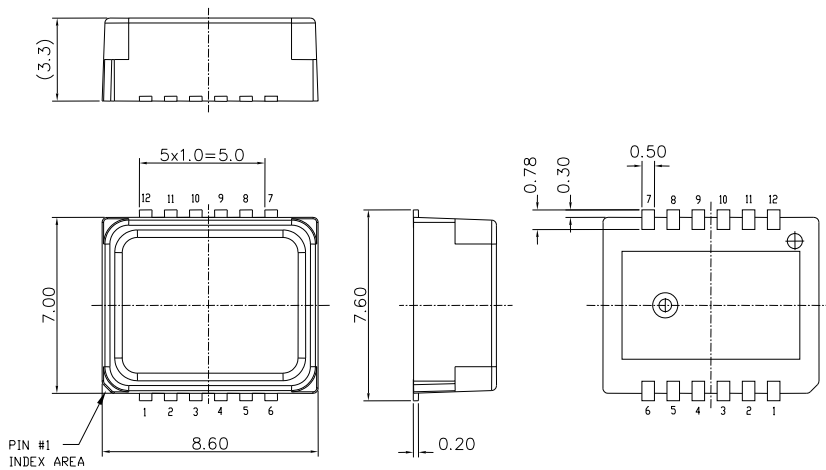


Figure 4. Housing dimensions

Application Note for Acceleration Output Reading (16 bit output sensitivity)

This is addition to SCA8X0_21X0_3100 Product Family Specification chapter 3.1.

DOUT_LSB

Address: 4h

Bits	Mode	Initial Value	Name	Description
7:0	R	00h	DATA	Acceleration data LSB frame Read always DOUT_MSB prior to DOUT_LSB.

DOUT_MSB

Address: 5h

Bits	Mode	Initial Value	Name	Description
7:0	R	00h	DATA	Acceleration data MSB frame Reading of this register latches DOUT_LSB.

The bit level description of acceleration data from DOUT_LSB ... DOUT_MSB registers is presented below. The acceleration data is presented in 2's complement format. At 0 g acceleration the output is ideally 0000h.

+/-1g product	DOUT MSB bits(7:0)								DOUT LSB bits(7:0)								16b		
	Bit number	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	[-]	Bits (15:0)
SCA8xx	s	512,0	256,0	128,0	64,0	32,0	16,0	8,0	4,00	2,00	1,00	0,50	0,25	0,13	0,06	0,03	[mg]	[Dec]	
+1g position	0	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	1000	32000
-1g position	1	0	0	0	0	0	1	1	0	0	0	0	0	0	0	0	0	-1000	-32000
+Full-scale	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1023	32767
-Full-scale	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-1024	-32768

Acceleration bits can be converted to mg acceleration (Acc) using following equation

$$Acc[mg] = -\frac{1}{32}s \cdot 2^{15} + \frac{1}{32} \sum_{n=0}^{14} b_n 2^n$$

where s is the bit number 15 (sign), and bn is the bit number n between 0 and 14.

Order information

Table 3. Order codes for SCA830-D07

Order code	Description	Measurement Range (g)	Packing	Qty
SCA830-D07-004	1-axis inclinometer with digital SPI interface	±1 g	Bulk	4 pcs
SCA830-D07-1	1-axis inclinometer with digital SPI interface	±1 g	T&R	100 pcs
SCA830-D07-10	1-axis inclinometer with digital SPI interface <i>This order code is used for automotive customers after customer has approved the product for production</i>	±1 g	T&R	1000 pcs

Murata reserves all rights to modify this document without prior notice

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Murata:](#)

[SCA830-D07-1](#) [SCA830-D07-10](#)