Micro Chip Transformer DXP18BN□□□□□□

Reference Specification

1. Scope

This reference specification applies to Micro Chip Transformer DXP18BN Series.

2. Part Numbering

(ex.) DX P 18 B N 50 14 T L (1) (2) (3) (4) (5) (6) (7) (8) (9)

- (1) Micro Chip Transformer
- (2) Structure (P: Film Type)
- (3) Dimension (L×W)
- (4) Type of Transformer (B: Balun)
- (5) Category

- (6) Port Impedance (50:50ohm / 75: 75ohm)
- (7) Impedance ratio (14: one to four)
- (8) Main Application (T:50~870MHz/H:470~790MHz/D:470~870MHz)
- (9) Packing Code L:Taping / B:Bulk

3. Electrical Specification

Customer Part Number	Murata Part Number	Freq. Range [MHz]	input-output Impedance [ohm]	Insertion Loss [dB max.]	CMRR [dB min.]	Rated Power [dBm]
	DXP18BN5014TL DXP18BN5014TB	50-870	50-200	1.5		
	DXP18BN5014HL DXP18BN5014HB	470-790	50-200	1.2	0.5	00
	DXP18BN5016DL DXP18BN5016DB	470-870	50-300	1.2	25	20
	DXP18BN7514TL DXP18BN7514TB	50-870	75-300	1.5		

Operating Temperature: -40 to +85°C Storage Temperature: -40 to +85°C

4. Standard Testing Condition

<Unless otherwise specified>

Temperature: Ordinary Temperature 15 to 35°C

Humidity: Ordinary Humidity 25 to 85%(RH)


<In case of doubt>
Temperature : 20 ± 2°C
Humidity : 60 to 70%(RH)

Atmospheric Pressure: 86 to106kPa


5. Style and Dimensions

■ Dimension

(Top View)

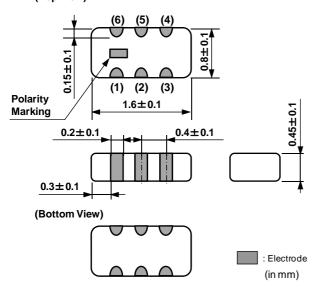

■Eqivalent Circuit



■Unit Mass (typ.) 0.003g



SpecNo.JEFK243A-0002H-01

■ NC (Non-Contact) Terminal

Don't connect NC terminal with any signal lines/GND lines on the circuit board.

6. Marking

Polarity Marking is on the upper surface of a Product.

7. Electrical Performance

Liectri	Electrical Performance							
No.	Item	Specification	Definition and Measurement Method					
7.1	Insertion Loss	Meet item 3.	Insertion Loss is given by Sds21 mag extracted from the below circuit.					
	(IL)		Port Impedance [ohm]					
				'	Port1	Port2	Port3	
				5014H	50	100	100	
				5014T	50	100	100	
				5016D	50	150	150	
				7514T	75	150	150	
			Where Sds21 is Parasitics	S-paramete s and loss fa	r of single ctors caus	mode stimued by the to	ulus - Differest board h	rential mode response nave to be removed.
7.2	CMRR	Meet item 3.	CMRR is given by the following equation, S-parameters are extracted from the below circuit.					
			Port	Impedance [D 10	D 10	7
				504 ALL	Port1	Port2	Port3	
				5014H 5014T	50 50	100 100	100 100	-
				50141 5016D	50	150	150	
				7514T	75	150	150	
			CMRR[dB] = 20log10(Sds21/Scs21)=20log10{(S21+S31)/(S21-S31)} Where Sds21 is S-parameter of single mode stimulus - Differential mode response Scs21 is S-parameter of single mode stimulus - Common mode response Parasitics and loss factors caused by the test board have to be removed.					

SpecNo.JEFK243A-0002H-01

8. Mechanical Performance


No.	Item	Specification	Test Method	
8.1	Appearance and Dimensions	Meet all dimension on item 5.	Visual Inspection and measurement with microscope.	
8.2	Solderability	The electrodes shall be at least 95% covered with new solder coating.	Flux:Ethanol solution of rosin,25(wt)% Pre-Heating: 150±10°C 60s to 90s Solder: Sn-3.0Ag-0.5Cu Solder Temperature: 240±5°C Immersion Time: 3±1 seconds Immersion and emersion rates: 25mm/s	
8.3	Resistance to Soldering Heat	Meet Table 1. Table 1 Appearance No damaged IL CMRR Meet Item 3.	Flux: Ethanol solution of rosin,25(wt)% Pre-Heating::150±10°C 60s to 90s Solder: Sn-3.0Ag-0.5Cu Solder Temperature: 270±5°C Immersion Time: 10±1 seconds Immersion and emersion rates: 25mm/s Then measured after exposure in the room condition for 4 to 48 hours.	
8.4	Drop		It shall be dropped on concrete or steel board. Method : free fall Height : 1 m The Number of Times : 3 times	
8.5	Vibration		It shall be soldered on the substrate. Oscillation Frequency: 10 to 2000 to 10Hz for 15 minutes Total Amplitude 3.0mm or Acceleration 196m/s² whichever is smaller Testing Time: A period of 2 hours in each of 3 mutually perpendicular directions. (Total 6 hours)	
8.6	Bending Strength		It shall be soldered on the Glass-epoxy substrate. Deflection: 3mm (t=1.0mm). Keeping time: 5 seconds Speed of Applying Force: 0.5mm/s Pressure jig Deflection 45 45 Product (in mm)	

9. Environmental Performance(Products shall be soldered on the substrate.)

No.	Item	Specification	Test Method	
9.1	Temperature Cycle	Meet Table 1.	1 Cycle Step 1 -40°C(+0°C,-3°C) / 30(+3,-0) min Step 2 Ordinary Temp. / within 3 min Step 3 +85(+3°C,-0°C) / 30(+3,-0) min Step 4 Ordinary Temp. / within 3 min Total of 100 cycles. Then measured after exposure in the room condition for 4 to 48 hours.	
9.2	Humidity	Temperature: 70±2°C Humidity: 90~95%(RH) Time: 1000(+48 hours,-0 hours) Then measured after exposure in the room condition for 4 to 48 hours.		
9.3	Heat Resistance		Temperature: 85±2°C Time: 1000(+48 hours,-0 hours) Then measured after exposure in the room condition for 4 to 48 hours.	
9.4	Cold Resistance		Temperature: -40± 2°C Time: 1000(+48 hours,-0 hours) Then measured after exposure in the room condition for 4 to 48 hours.	


SpecNo.JEFK243A-0002H-01

10. Frequency Characteristics (Typ.)

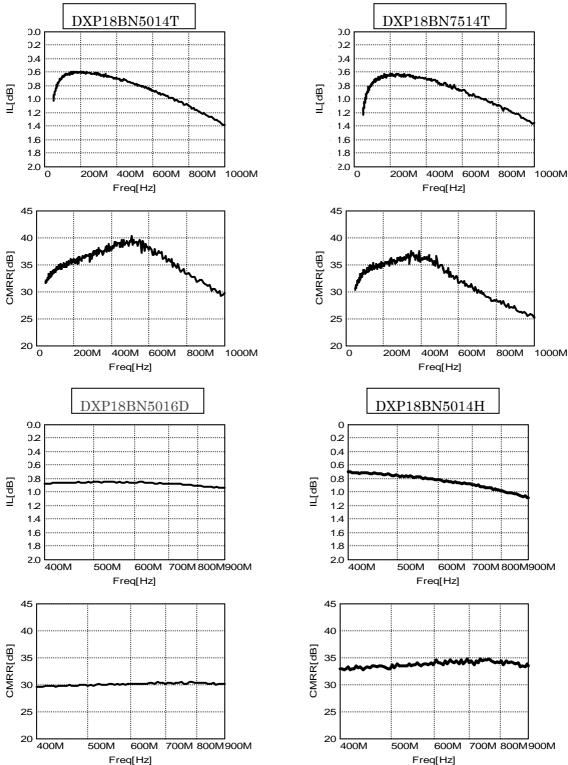

11. Specification of Packaging

11.1 Appearance and Dimensions (8mm-wide, Plastic tape)

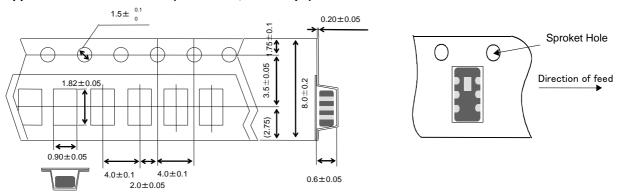

11.2 Specification of Taping

- (1)Packing quantity(Standard quantity) 5000 pcs. / reel
- (2)Packing Method

Products shall be packaged in each embossed cavity of plastic tape and sealed with cover tape.

(3) Spliced point

The cover tape have no spliced point.

(4) Sprocket Hole

Sprocket hole shall be located on the left hand side toward the direction of feed.

(5)Missing components number


Missing components number within 0.1% of the number per reel or 1 pc, whichever is greater, and are not continuous. The specified quantity per reel is kept.

11.3 Pull Strength of the Tape Package


Plastic Tape	5N min.	
Cover Tape	10N min.	

11.4 Peeling force of the Cover Tape

0.2 to 0.7N(Minimum value is Typical) Peeling verosity is 300 mm / min



11.5 Dimensions of Leader-tape, Trailer and Reel

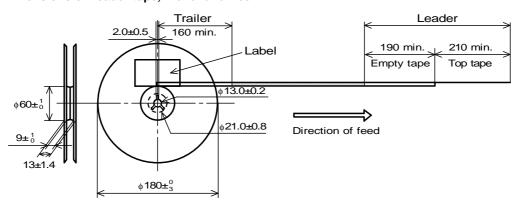

11.6 Marking for reel

Customer part number, MURATA part number, Inspection number(*1), RoHS Marking(*2), Quantity, etc

(1) Factory Code (2) Date First digit : Year / Last digit of y

First digit : Year / Last digit of year Second digit : Month / Jan. to Sep. → 1 to 9, Oct. to Dec. → O,N,D

 $\times\!\!\times\!\!\times$

Third, Fourth digit: Day

(3) Serial No.

*2) « Expression of RoHS Marking » ROHS $-\underline{Y}$ ($\underline{\triangle}$) (1) (2)


(1) RoHS regulation conformity parts.

(2) MURATA classification number

11.7 Marking for Outside package

Customer name Purchasing Order Number, Customer Part Number, MURATA part number, RoHS Marking (*2), Quantity, etc

11.8 Specification of Outer Case



Outer Case Dimensions (mm)			Standard Reel Quantity in Outer Cas
W	D	Н	(Reel)
186	186	93	5


* Above Outer Case size is typical. It depends on a quantity of an order.

12. \triangle Caution

12.1. Mounting Direction

Mount products in right direction.

Wrong direction which is 180 ° rotated from right direction cause serious trouble.



12.2. Limitation of Applications

Please contact us before using our products for the applications listed below which require especially high reliability for the prevention of defects which might directly cause damage to the third party's life, body or property.

- (1) Aircraft equipment
- (2) Aerospace equipment
- (3) Undersea equipment
- (4) Power plant control equipment
- (5) Medical equipment
- (6) Transportation equipment (vehicles, trains, ships, etc.)
- (7) Traffic signal equipment
- (8) Disaster prevention / crime prevention equipment
- (9) Data-processing equipment
- (10) Applications of similar complexity and / or reliability requirements to the applications listed in the above.

13. Notice

Products can only be soldered with reflow.

This product is designed for solder mounting.

Please consult us in advance for applying other mounting method such as conductive adhesive.

13.1 NC (Non-Contact) Terminal


Don't connect NC terminal with any signal lines/GND lines on the circuit board, unless otherwise, it may affect on the performance of this part.

Solder the NC terminal on soldering pad, which has no electrical connection with any other lines, to secure the fixing strength of the part and to prevent displacement of the part during reflow soldering.

13.2 Flux and Solder

Flux	Use rosin-based flux, (with converting chlorine content 0.06 to 0.1(wt)%.),					
	but not highly acidic flux					
	(with Halogen content exceeding 0.2(wt)% conversion to chlorine).					
	Do not use water-soluble flux.					
Solder	Use Sn-3.0Ag-0.5Cu solder					
	Standard thickness of the solder paste should be 100 to 150um.					

13.3 Standard Land Dimensions (Reflow)

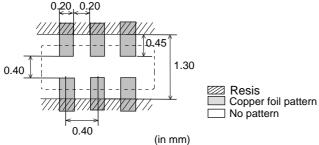

13.4 Assembling

<Thermal Shock>


Pre-heating should be in such a way that the temperature difference between solder and ceramic surface is limited to 100°C MAX. Also cooling into solvent after soldering should be in such a way that the temperature difference is limited to 100°C max.

13.5 Standard Soldering Condition

(1) Soldering Condition

Standard soldering profile and the limit soldering profile is as follows.

The excessive limit soldering conditions may cause leaching of the electrode and / or resulting in the deterioration of product quality.

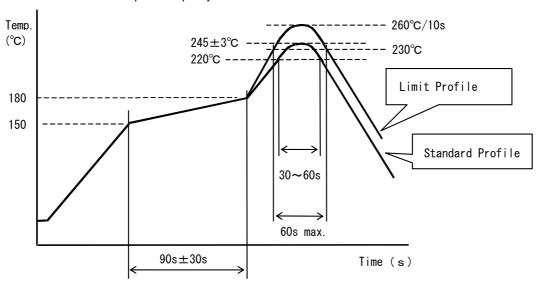

	Standard Profile	Limit Profile
Pre-heating	150~180°C 、90s±30s	
Heating	above 220°C、30s∼60s	above 230°C, 60s max.
Peak temperature	245±3°C	260°C、10s
Cycle of reflow	2 times	2 times

(2) Reworking with Soldering iron

The following conditions must be strictly followed when using a soldering iron after being mounted by reflow soldering.

Tip temperature / Soldering time : 350°C max / 3(+1,-0)s

Soldering iron output :30W max


Tip diameter: \$\psi 3mm

*Reworking should be limited to 2 times.

Notes: Do not touch the products directly with the soldering iron.

(3) Solder Volume

Solder shall be used not to be exceeded the upper limits as shown below.



1/3 T \leq t \leq T (T:thickness of electrodes) Accordingly increasing the solder volume, the mechanical stress to Chip is also increased.

Exceeding solder volume may cause the failure of mechanical or electrical performance.


13.6 Resin coating

The electric characteristics may change and/or it may affect on the product's performance due to high cure-stress of resin to be used for coating / molding products. So please pay your careful attention when you select resin. In prior to use, please make the reliability evaluation with the product mounted in your application set.

13.7 Attention regarding P.C.B. bending


The following shall be considered when designing and laying out P.C.B.'s.

(1) P.C.B. shall be designed so that products are not subject to the mechanical stress due to warping the board.



Products shall be location the sideways Direction (Length : a<b) to the machanical Stress.

[Warping direction]

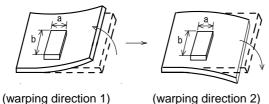


Products(warping direction 1, warping direction 2) shall be located carefully so that products are not subjected to the mechanical stress due to warping the board. Because they may be subjected the mechanical stress in order of warping direction 1>warping direction 2.

(2) Components location on P.C.B. separation.

It is effective to implement the following measures, to reduce stress in separating the board. It is best to implement all of the following three measures; however, implement as many measures as possible to reduce stress.


Contents of Measures	Stress Level
(1) Turn the mounting direction of the component parallel to the board separation surface.	A > D*1
(2) Add slits in the board separation part.	A > B
(3) Keep the mounting position of the component away from the board separation surface.	A > C



^{*1} A > D is valid when stress is added vertically to the perforation as with Hand Separation. If a Cutting Disc is used, stress will be diagonal to the PCB, therefore A > D is invalid.

(3) Mounting Components Near Screw Holes

When a component is mounted near a screw hole, it may be affected by the board deflection that occurs During the tightening of the screw. Mount the component in a position as far away from the screw holes as possible.



13.8 Attention Regarding P.C.B. Design

< The Arrangement of Products >

P.C.B. shall be designed so that products are far from the portion of perforation.

The portion of perforation shall be designed as narrow as possible and shall be designed so as not to be applied the stress in the case of P.C.B. separation.

Products shall not be arranged on the line of a series of holes when there are big holes in P.C.B. (Because the stress concentrate on the line of holes.)




Support pins shall be set under P.C.B . to prevent causing a warp to P.C.B. during placing the products on the other side of P.C.B.




P.C.B. shall not be separated with hand.

P.C.B. shall be separated with the fixture so as not to cause P.C.B. bending.



Portion of



13.9 Cleaning Conditions

Products shall be cleaned on the following conditions.

- (1) Cleaning temperature shall be limited to 60°C max. (40°C max. for Isopropyl alcohol.)
- (2) Ultrasonic cleaning shall comply with the following conditions, avoiding the resonance phenomenon at the mounted products and P.C.B..
 - Power : 20W/ I max. Frequency : 28kHz to 40kHz Time : 5 minutes max.
- (3) Cleaner
 - 1. Alternative cleaner Isopropyl alcohol (IPA)
 - 2. Aqueous agent PINE ALPHA ST-100S
- (4) There shall be no residual flux and residual cleaner after cleaning.

In the case of using aqueous agent, products shall be dried completely after rinse with de-ionized water in order to remove the cleaner.

(5) Other cleaning

Please contact us.

13.10 Handling of a substrate

After mounting products on a substrate, do not apply any stress to the product caused by bending or twisting to the substrate when cropping the substrate, inserting and removing a connector from the substrate or tightening screw to the substrate.

Excessive mechanical stress may cause cracking in the product.



13.11 Operating Environment

Do not use this product under the following environmental conditions, on deterioration of the performance, such as insulation resistance may result from the use.

- (1) in corrosive gases (acidic gases, alkaline gases, chlorine, sulfur gases, organic gases and etc.)
- (2) in the atmosphere where liquid such as organic solvent, may splash on the products.

13.12 Storage Condition

(1) Storage period

Use the products within 12 months after delivered.

Solderability should be checked if this period is exceeded.

(2) Storage environment conditions

•Products should be stored in the warehouse on the following conditions.

Temperature : -10 ~ +40°C

Humidity : 15 to 85% relative humidity No rapid change on temperature and humidity.

- Products should not be stored in corrosive gases, such as sulfureous, acid gases, alkaline gases, to prevent the following deterioration. Poor solderability due to the oxidized electrode.
- Products should be stored on the palette for the prevention of the influence from humidity, dust and so on.
- · Products should be stored in the warehouse without heat shock, vibration, direct sunlight and so on.
- Products should not be stored under the air tights packaged condition.
- (3) Delivery

Care should be taken when transporting or handling product to avoid excessive vibration or mechanical shock.

14. A Notes

- (1)Please make sure that your product has been evaluated in view of your specifications with our product being mounted to your product.
- (2) You are requested not to use our product deviating from the reference specifications.
- (3)The contents of this reference specification are subject to change without advance notice. Please approve our product specifications or transact the approval sheet for product specifications before ordering.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Murata:

DXP18BN5014HL DXP18BN5014TL DXP18BN7514TL DXP18BN5016DL