

# Axial Power Inductor

AIAP-03



RoHS/RoHS II Compliant



22.9 x  $\phi$ 11.4mm

## FEATURES:

- Low cost axial leaded inductors
- High current rating
- Wide inductance range
- Covered with UL heat shrink tubing

## APPLICATIONS:

- Power supplies
- Switching circuits
- TV and audio equipment
- Telecommunication devices
- RF and other filters

## ELECTRICAL SPECIFICATIONS:

| Part No.    | L( $\mu$ H) | Tolerance | DCR( $\Omega$ ) | I <sub>DC</sub> (A) | Inductance Code |
|-------------|-------------|-----------|-----------------|---------------------|-----------------|
|             |             | (%)       | (max)           | (max)               |                 |
| AIAP-03-3R9 | 3.9         | M         | 0.007           | 15.50               | 3R9M            |
| AIAP-03-4R7 | 4.7         | M         | 0.008           | 13.90               | 4R7 M           |
| AIAP-03-5R6 | 5.6         | M         | 0.011           | 12.60               | 5R6 M           |
| AIAP-03-6R8 | 6.8         | M         | 0.013           | 11.60               | 6R8 M           |
| AIAP-03-8R2 | 8.2         | K         | 0.017           | 9.89                | 8R2K            |
| AIAP-03-100 | 10          | K         | 0.019           | 8.70                | 100K            |
| AIAP-03-120 | 12          | K         | 0.020           | 8.21                | 120K            |
| AIAP-03-150 | 15          | K         | 0.022           | 7.34                | 150K            |
| AIAP-03-180 | 18          | K         | 0.023           | 6.64                | 180K            |
| AIAP-03-220 | 22          | K         | 0.026           | 6.07                | 220K            |
| AIAP-03-270 | 27          | K         | 0.027           | 5.36                | 270K            |
| AIAP-03-330 | 33          | K         | 0.032           | 4.83                | 330K            |
| AIAP-03-390 | 39          | K         | 0.033           | 4.36                | 390K            |
| AIAP-03-470 | 47          | K         | 0.035           | 3.98                | 470K            |
| AIAP-03-560 | 56          | K         | 0.037           | 3.66                | 560K            |
| AIAP-03-680 | 68          | K         | 0.047           | 3.31                | 680K            |
| AIAP-03-820 | 82          | K         | 0.060           | 3.10                | 820K            |
| AIAP-03-101 | 100         | K         | 0.090           | 2.79                | 101K            |
| AIAP-03-121 | 120         | K         | 0.113           | 2.54                | 121K            |
| AIAP-03-151 | 150         | K         | 0.129           | 2.22                | 151K            |
| AIAP-03-181 | 180         | K         | 0.150           | 1.98                | 181K            |
| AIAP-03-221 | 220         | K         | 0.162           | 1.89                | 221K            |
| AIAP-03-271 | 270         | K         | 0.208           | 1.63                | 271K            |
| AIAP-03-331 | 330         | K         | 0.212           | 1.51                | 331K            |
| AIAP-03-391 | 390         | K         | 0.281           | 1.39                | 391K            |
| AIAP-03-471 | 470         | K         | 0.380           | 1.24                | 471K            |
| AIAP-03-561 | 560         | K         | 0.420           | 1.17                | 561K            |
| AIAP-03-681 | 680         | K         | 0.548           | 1.050               | 681K            |
| AIAP-03-821 | 820         | K         | 0.655           | 0.970               | 821K            |
| AIAP-03-102 | 1000        | K         | 0.844           | 0.870               | 102K            |
| AIAP-03-122 | 1200        | K         | 1.04            | 0.790               | 122K            |
| AIAP-03-152 | 1500        | K         | 1.18            | 0.700               | 152K            |
| AIAP-03-182 | 1800        | K         | 1.56            | 0.640               | 182K            |
| AIAP-03-222 | 2200        | K         | 2.00            | 0.580               | 222K            |
| AIAP-03-272 | 2700        | K         | 2.06            | 0.530               | 272K            |
| AIAP-03-332 | 3300        | K         | 2.63            | 0.470               | 332K            |
| AIAP-03-392 | 3900        | K         | 2.75            | 0.430               | 392K            |
| AIAP-03-472 | 4700        | K         | 3.19            | 0.390               | 472K            |
| AIAP-03-562 | 5600        | K         | 3.92            | 0.359               | 562K            |
| AIAP-03-682 | 6800        | K         | 5.69            | 0.322               | 682K            |
| AIAP-03-822 | 8200        | K         | 6.32            | 0.293               | 822K            |
| AIAP-03-103 | 10000       | K         | 7.30            | 0.266               | 103K            |
| AIAP-03-123 | 12000       | K         | 10.0            | 0.257               | 123K            |
| AIAP-03-153 | 15000       | K         | 11.2            | 0.230               | 153K            |

# Axial Power Inductor

AIAP-03



RoHS/RoHS II Compliant



22.9 x  $\phi$ 11.4mm

## Test Conditions and equipments

Test frequency: 1kHz 0.25Vrms

I<sub>DC</sub>: 10% inductance drops typical

## Operating Temperature

-40°C ~ +125 °C (including self-heating)

## Storage Temperature

-40°C ~ +125 °C

## PART NUMBER IDENTIFICATION

AIAP-03-



Packing (100pcs / box)

### Inductance Code


Please refer to the table above

### Tolerance

K:  $\pm 10\%$

M:  $\pm 20\%$

## OUTLINE DRAWING:

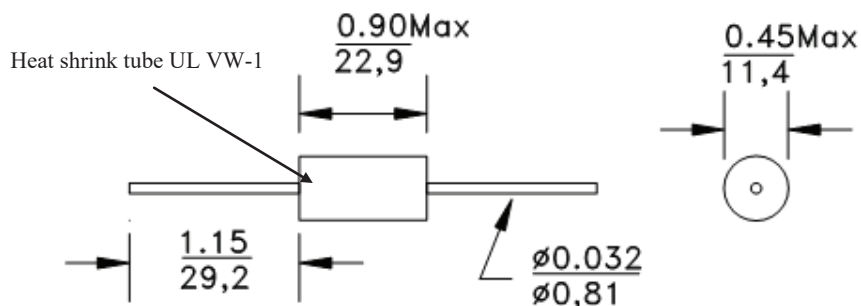

Dimension: inch/mm

**ATTENTION:** Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.



5101 Hidden Creek Ln Spicewood TX 78669  
Phone: 512-371-6159 | Fax: 512-351-8858  
For terms and conditions of sales, please visit: [www.abracon.com](http://www.abracon.com)

REVISED: 01-15-21

ABRACON IS  
ISO9001-2015  
CERTIFIED

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ABRACON:](#)

|                                      |                                      |                                      |                                      |                                      |                                      |                                      |
|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| <u><a href="#">AIAP-03-100-K</a></u> | <u><a href="#">AIAP-03-101-K</a></u> | <u><a href="#">AIAP-03-102-K</a></u> | <u><a href="#">AIAP-03-103-K</a></u> | <u><a href="#">AIAP-03-120-K</a></u> | <u><a href="#">AIAP-03-121-K</a></u> | <u><a href="#">AIAP-03-122-K</a></u> |
| <u><a href="#">AIAP-03-123-K</a></u> | <u><a href="#">AIAP-03-150-K</a></u> | <u><a href="#">AIAP-03-151-K</a></u> | <u><a href="#">AIAP-03-152-K</a></u> | <u><a href="#">AIAP-03-153-K</a></u> | <u><a href="#">AIAP-03-180-K</a></u> | <u><a href="#">AIAP-03-181-K</a></u> |
| <u><a href="#">AIAP-03-182-K</a></u> | <u><a href="#">AIAP-03-220-K</a></u> | <u><a href="#">AIAP-03-221-K</a></u> | <u><a href="#">AIAP-03-222-K</a></u> | <u><a href="#">AIAP-03-270-K</a></u> | <u><a href="#">AIAP-03-271-K</a></u> | <u><a href="#">AIAP-03-272-K</a></u> |
| <u><a href="#">AIAP-03-330-K</a></u> | <u><a href="#">AIAP-03-331-K</a></u> | <u><a href="#">AIAP-03-332-K</a></u> | <u><a href="#">AIAP-03-390-K</a></u> | <u><a href="#">AIAP-03-391-K</a></u> | <u><a href="#">AIAP-03-392-K</a></u> | <u><a href="#">AIAP-03-470-K</a></u> |
| <u><a href="#">AIAP-03-471-K</a></u> | <u><a href="#">AIAP-03-472-K</a></u> | <u><a href="#">AIAP-03-4R7-K</a></u> | <u><a href="#">AIAP-03-560-K</a></u> | <u><a href="#">AIAP-03-561-K</a></u> | <u><a href="#">AIAP-03-562-K</a></u> | <u><a href="#">AIAP-03-5R6-K</a></u> |
| <u><a href="#">AIAP-03-680-K</a></u> | <u><a href="#">AIAP-03-681-K</a></u> | <u><a href="#">AIAP-03-682-K</a></u> | <u><a href="#">AIAP-03-6R8-K</a></u> | <u><a href="#">AIAP-03-820-K</a></u> | <u><a href="#">AIAP-03-821-K</a></u> | <u><a href="#">AIAP-03-822-K</a></u> |
| <u><a href="#">AIAP-03-8R2-K</a></u> | <u><a href="#">AIAP-03-4R7K</a></u>  | <u><a href="#">AIAP-03-6R8K</a></u>  | <u><a href="#">AIAP-03-5R6K</a></u>  |                                      |                                      |                                      |