APAMS-119

MSL level: Not Applicable

FEATURES:

- High Reliability/ Sensitivity
- Compact Size
- Easy to install
- ROHS Compliant

RoHS/RoHS II compliant Lead in copper alloy exemption (6c); and Lead in glass exemption (7c-I)


78.0xØ12.0mm

TYPICAL APPLICATIONS:

- Wireless Communications
- GSM
- GPRS
- CDMA
- UMTS
- Vehicle Monitoring

STANDARD SPECIFICATIONS:					
Parameters	Min.	Typ.	Max.	Units	Note
Eraquanay Danga	820		880	MHz	(GSM900)
Frequency Range	1710		1880	MHz	(GSM1800)
VSWR		4:1			
Polarization Model		Vertical			
Impedance		50		Ω	
Gain			2.5	dBi	
Azimuth	On	Omni-Directional			
Power Capability		50		W	
Operating Temperature	-40		+60	°C	
Storage Temperature	-20		+40	°C	

S11 CHARACTERISTICS

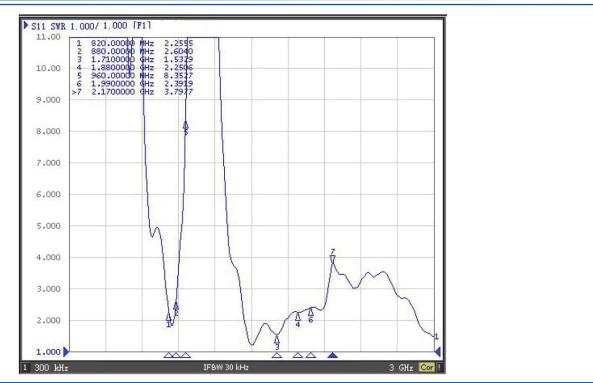



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

REVISED: 11-12-19

ABRACON IS ISO9001-2015 CERTIFIED

APAMS-119

RoHS/RoHS II compliant Lead in copper alloy exemption (6c); and Lead in glass exemption (7c-I)

78.0xØ12.0mm

OUTLINE DRAWING:

*9.5±0.5
· *78±2
+12±0.5

Parameters	Description
Cable	RG-178
Connector	SMA
Radiator	Cuprum
Enclosure	ТРЕ
Radome Color	Black

6

Unit: mm Tolerance : ±0.2 mm

PACKAGING:

Package Type	Quantity	
Plastic bag Outer Box	1 pcs/ Plastic bag 1300 pcs/box	DIELECTRIC ANTENNA
		SIZE: 345×210×360 G. WT kG N. WT kG
		Outer box

CAUTION:

- (1) Do not apply excess mechanical stress to the component body or terminations. Do not attempt to re-form or bend the components as this will cause damage to the component.
- (2) Do not expose the component to open flame.
- (3) This specification applies to the functionality of the component as a single unit. Please insure the component is thoroughly evaluated in the application circuit.

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

REVISED: 11-12-19



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON: APAMS-119