


G3VM-41QR10/61QR

MOS FET Relays S-VSON 4-pin, Low-output-capacitance and Low-ON-resistance Type (with Low C × R)

World's smallest class* New S-VSON Package with Low Output Capacitance and Low ON Resistance

- Load voltage: 40 V / 60 V.
- G3VM-41QR10: Low C × R = 4.95 pF·Ω, C_{OFF} (standard) = 0.45 pF, R_{ON} (standard) = 11 Ω
- G3VM-61QR: Low C × R = 13.2 pF·Ω, C_{OFF} (standard) = 12 pF, R_{ON} (standard) = 1.1 Ω
- High Ambient operating temperature: -40°C to +110°C

* As of January 2018 Survey by OMRON.

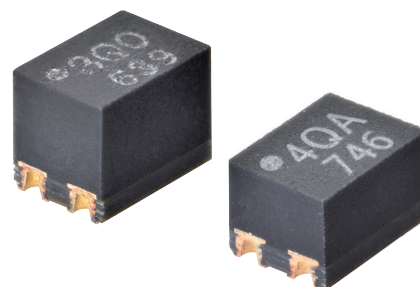

NEW


Note: The actual product is marked differently from the image shown here.

RoHS Compliant

Application Examples

- Semiconductor test equipment
- Test & measurement equipment
- Communication equipment
- Data loggers

Package (Unit: mm, Average)

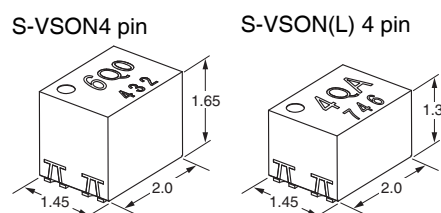

Note: The actual product is marked differently from the image shown here.

Model Number Legend

G3VM-□□□□□
1 2 3 4 5

1. Load Voltage

- 4: 40V
- 6: 60 V

4. Additional functions

- R: Low On-resistance

2. Contact form Package type

- 1: 1a (SPST-NO)

5. Other informations

When specifications overlap, serial code is added in the recorded order.

3. Package type

- Q: S-VSON 4 pin
- S-VSON(L)* 4 pin
- * (L): Low profile type

Ordering Information

Package type	Contact form	Terminals	Load voltage (peak value) *	Continuous load current (peak value) *	Packing/Tape cut		Packing/Tape & reel	
					Model	Minimum package quantity	Model	Minimum package quantity
S-VSON4(L)4	1a (SPST-NO)	Surface-mounting Terminals	40 V	120 mA	G3VM-41QR10	1 pc.	G3VM-41QR10 (TR05)	500 pcs.
S-VSON4			60 V	400 mA	G3VM-61QR		G3VM-61QR (TR05)	

* The AC peak and DC value are given for the load voltage and continuous load current.

Note: When ordering tape packing, add "(TR05)" (500 pcs/reel) to the model number.

Ask your OMRON representative for orders under 500 pcs. We can supply products with the tape already cut.

Tape-cut S-VSON is packaged without humidity resistance. Use manual soldering to mount them.

Refer to common precautions.

G3VM-41QR10/61QR

S-VSON

■Absolute Maximum Ratings (Ta = 25°C)


Item		Symbol	G3VM-41QR10	G3VM-61QR	Unit	Measurement conditions
Input	LED forward current	I _F	30		mA	
	LED forward current reduction rate	ΔI _F /°C	-0.3		mA/°C	Ta ≥ 25°C
	LED reverse voltage	V _R	6		V	
	Connection temperature	T _J	125		°C	
Output	Load voltage (AC peak/DC)	V _{OFF}	40	60	V	
	Continuous load current (AC peak/DC)	I _O	120	400	mA	
	ON current reduction rate	ΔI _O /°C	-1.2	-4	mA/°C	Ta ≥ 25°C
	Pulse ON current	I _{OP}	0.36	1.2	A	t = 100 ms, Duty = 1/10
	Connection temperature	T _J	125		°C	
Dielectric strength between I/O (See note 1.)		V _{I-O}	500		V _{rms}	AC for 1 min
Ambient operating temperature		T _a	-40 to +110		°C	With no icing or condensation
Ambient storage temperature		T _{stg}	-40 to +125		°C	
Soldering temperature		—	260		°C	10 s

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

■Electrical Characteristics (Ta = 25°C)

Item		Symbol	G3VM-41QR10		G3VM-61QR	Unit	Measurement conditions
Input	LED forward voltage	V _F	Minimum	1.1		V	I _F = 10 mA
			Typical	1.21			
			Maximum	1.4			
	Reverse current	I _R	Maximum	10		μA	V _R = 5 V
	Capacity between terminals	C _T	Typical	30		pF	V = 0, f = 1 MHz
	Trigger LED forward current	I _{FT}	Typical	0.8	—	mA	I _O = 100 mA
			Maximum	3			
Release LED forward current	I _{FC}	Minimum	0.1		mA	I _{OFF} = 10 μA	
Output	Maximum resistance with output ON	R _{ON}	Typical	11	1.1	Ω	G3VM-41QR10: I _F = 5 mA, t<1s, I _O = 120 mA G3VM-61QR: I _F = 5 mA, t<1s, I _O = 400 mA
			Maximum	14	1.5		
	Current leakage when the relay is open	I _{LEAK}	Maximum	1	1000 (1)	nA	G3VM-41QR: V _{OFF} = 40 V G3VM-61QR: V _{OFF} = 60 V (V _{OFF} = 50 V)
	Capacity between terminals	C _{Off}	Typical	0.45	12	pF	V = 0, f = 100 MHz, t<1s
			Maximum	0.8	20		
Capacity between I/O terminals		C _{I-O}	Typical	1	0.9	pF	f = 1 MHz, V _S = 0V
Insulation resistance between I/O terminals		R _{I-O}	Typical	10 ⁸		MΩ	V _{I-O} = 500 VDC, RoH≤60%
Turn-ON time	t _{ON}		Typical	0.08	—	ms	I _F = 5 mA, R _L = 200, V _{DD} = 20 V (I _F = 10 mA, R _L = 200, V _{DD} = 20 V) (See note 2.)
			Maximum	0.2	0.5 (0.25)		
Turn-OFF time	t _{OFF}		Typical	0.04	—	ms	
			Maximum	0.3	0.3 (0.3)		

Note: 2. Turn-ON and Turn-OFF Times

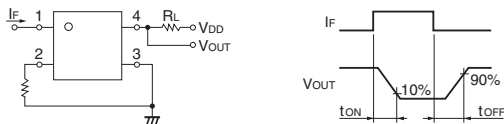

■Recommended Operating Conditions


For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.


Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.					
Item	Symbol		G3VM-41QR10	G3VM-61QR	Unit
Load voltage (AC peak/DC)	V _{DD}	Maximum	32	48	V
Operating LED forward current	I _F	Minimum	5		mA
		Typical	7.5		
		Maximum	20		
Continuous load current (AC peak/DC)	I _O	Maximum	120	400	
Ambient operating temperature	T _a	Minimum	-20		°C
		Maximum	85	100	

Engineering Data


LED forward current vs. Ambient temperature

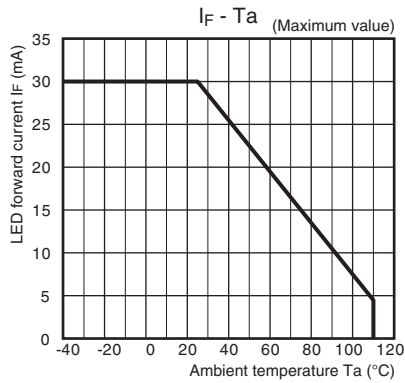


Continuous load current vs. Ambient temperature

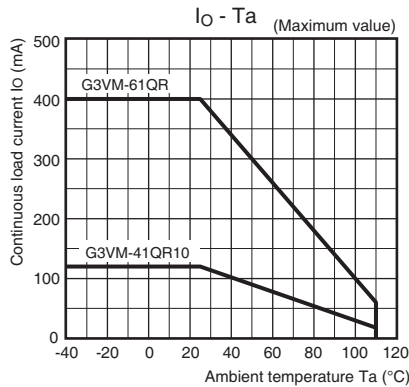


LED forward current vs. LED forward voltage

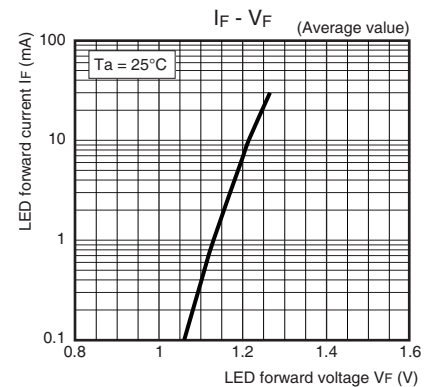


Continuous load current vs. On-state voltage

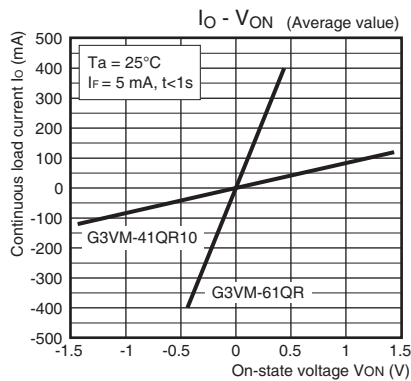


On-state resistance vs. Ambient temperature

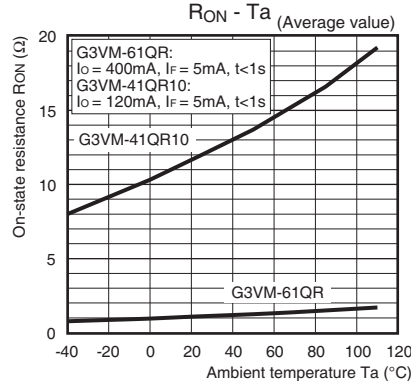


Trigger LED forward current vs. Ambient temperature

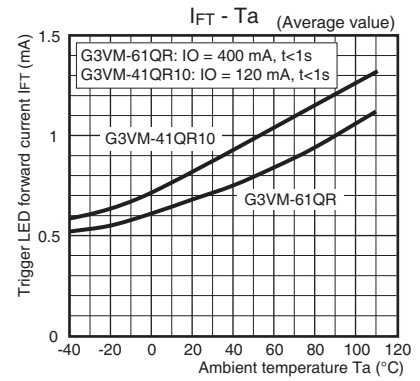


Turn ON, Turn OFF time vs. LED forward current

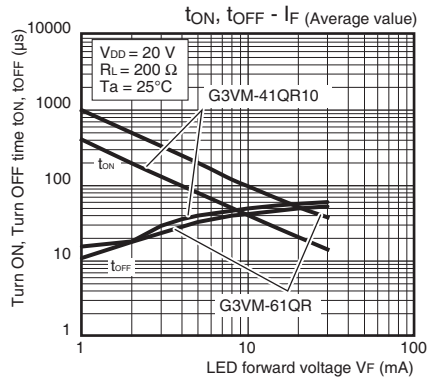


Turn ON, Turn OFF time vs. Ambient temperature

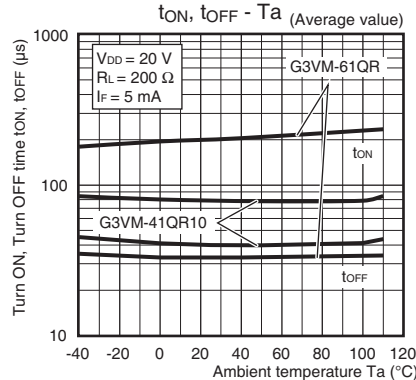


Current leakage vs. Load voltage

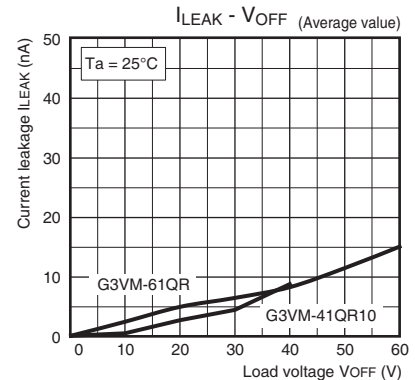

Current leakage vs. Ambient temperature

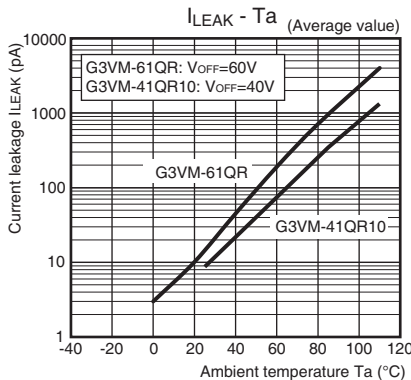

Output terminal capacitance vs. Load voltage

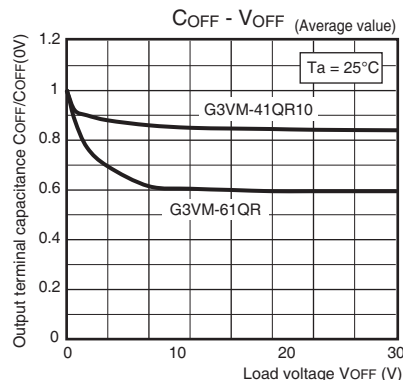


■Appearance / Terminal Arrangement / Internal Connections

■Appearance

S-VSON (Super-Very Small Outline Non-leaded)


S-VSON4 pin / S-VSON(L)4 pin



* Actual model name marking for each model

Model	Marking
G3VM-41QR10	4QA
G3VM-61QR	6Q0

■Terminal Arrangement/Internal Connections (Top View)



Note 1. The actual product is marked differently from the image shown here.

2. "G3VM" does not appear in the model number on the Relay.



■Dimensions (Unit: mm)

S-VSON (Super-Very Small Outline Non-leaded)

S-VSON4 pin

Surface-mounting Terminals

Weight: 0.01 g





Note: The actual product is marked differently from the image shown here.

S-VSON(L)4 pin

Surface-mounting Terminals


Weight: 0.01 g



Note: The actual product is marked differently from the image shown here.

Actual Mounting Pad Dimensions


(Recommended Value, Top View)



Unless otherwise specified, the dimensional tolerance is ± 0.1 mm.

Actual Mounting Pad Dimensions

(Recommended Value, Top View)



Unless otherwise specified, the dimensional tolerance is ± 0.1 mm.

■Safety Precautions

- Refer to "Common Precautions" for all G3VM models.

• Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.

• Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

OMRON Corporation

Electronic and Mechanical Components Company

Contact: www.omron.com/ecb

Cat. No. K291-E1-02

0118(0717)(O)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Omron:

[G3VM-61QR\(TR05\)](#)