
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	COPPER CONDUCTOR SIZE	EXPANDED WIRE RANGE***	I.D.	O.D. +/01	OVERALL LENGTH "A" +/12	WIRE STRIP LENGTH	PLATING	PANDUIT COLOR CODE ON BARREL	PANDUIT DIE INDEX NUMBER ON BARREL	ALTERNATE INDUSTRY DIE INDEX NUMBER ON BARREL
SCS300-X	300 kcmil	#2/0 - 300 kcmil	0.65	0.81	2.25	1-1/16	ELECTRO-TIN	WHITE	P66	(17)
SCS300UT-X	1						N/A	N/A	N/A	N/A
SCS350-X							ELECTRO-TIN	RED	P71	(18)
SCS350UT-X	350 kcmil	#3/0 - 350 kcmil	0.70	0.87	2.37	1-1/8	N/A	N/A	N/A	N/A
SCS400-6							ELECTRO-TIN	BLUE	P76	(19)
SCS400UT-6	400 kcmil	#4/0 - 400 kcmil	0.76	0.95	2.50	1-3/16	N/A	N/A	N/A	N/A
SCS500-6		#4/0 - 500 kcmil	0.83	1.05	2.87	1-3/8	ELECTRO-TIN	BROWN	P87	(20)
SCS500UT-6	500 kcmil						N/A	N/A	N/A	N/A
SCS600-6							ELECTRO-TIN	GREEN	P94	(22)
SCS600UT-6	600 kcmil	250 - 600 kcmil	0.92	1.18	2.87	1-3/8	N/A	N/A	N/A	N/A
SCS750-6							ELECTRO-TIN	BLACK	P106	(24)
SCS750UT-6	750 kcmil	500 - 750 kcmil	1.03	1.29	3.37	1-5/8	N/A	N/A	N/A	N/A
SCS800-6	800 kcmiL		1.05	1.35	3.37	1-7/8	ELECTRO-TIN	ORANGE	P107	(25)
SCS1000-3							ELECTRO-TIN	WHITE	P125	(27)
SCS1000UT-3	1000 kcmil		1.17	1.50	3.87	1-7/8	N/A	N/A	N/A	N/A



NOTES:

- 1. MATERIAL: HIGH CONDUCTIVITY SEAMLESS COPPER TUBING
- 2. UL LISTED WITH CODE COPPER CONDUCTORS FOR APPLICATIONS UP TO 35KV, FILE E52164
 - NOTE: SCS800-6 IS NOT UL LISTED
- 3. CONSULT CABLE MANUFACTURER FOR VOLTAGE STREE RELIEF INSTRUCTIONS WITH APPLICATIONS GREATER THAN 2000 VOLTS
- 4. CSA CERTIFIED WITH COPPER CODE CONDUCTORS FOR APPLICATIONS UP TO 35 KV FILE LR31212.
- NOTE: SCS800-6 IS NOT CSA CERTIFIED
- 5. FOR USE WITH COPPER STRANDED CLASS B COMPACT, COMPRESSED, OR CONCENTRIC, CLASS C CONCENTRIC WIRE ONLY.

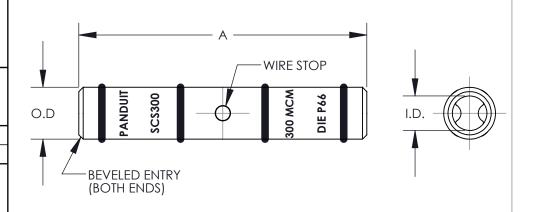

							SCS STANDARD BARREL 300 kcmil - 1000 kcmil COPPER SPLICES CUSTOMER DRAWING
							DATASET FILE NAME C41135/09.SLDDRW UNLESS OTHERWISE SPECIFIED, MATERIAL
09	7/18	JHNU	JHNU	RGB	REVISED UP PART SUFFIX TO UT REVISED NOTES TO SPECIFY SCS800-6 IS NOT UL LISTED/CSA CERTIFIED REVISED TITLE BLOCK	N41135BB- C41135	DIMENSIONAL TOLERANCES ARE: IN [mm] .X ± .XXX ± SEE NOTES .XX ± ANGLES ± THIRD ANGLE DRAWING NUMBER .XXX ± DRAWING NUMBER
REV	DATE	BY	СНК	APR	DESCRIPTION	ECN	PROJECTION C41135 DRAWN BY DATE CHK SCALE PWS 3/93 GRM N/A SHEET 1 OF 1 B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

SCS500-6 SCS1000-3 SCS400-6