
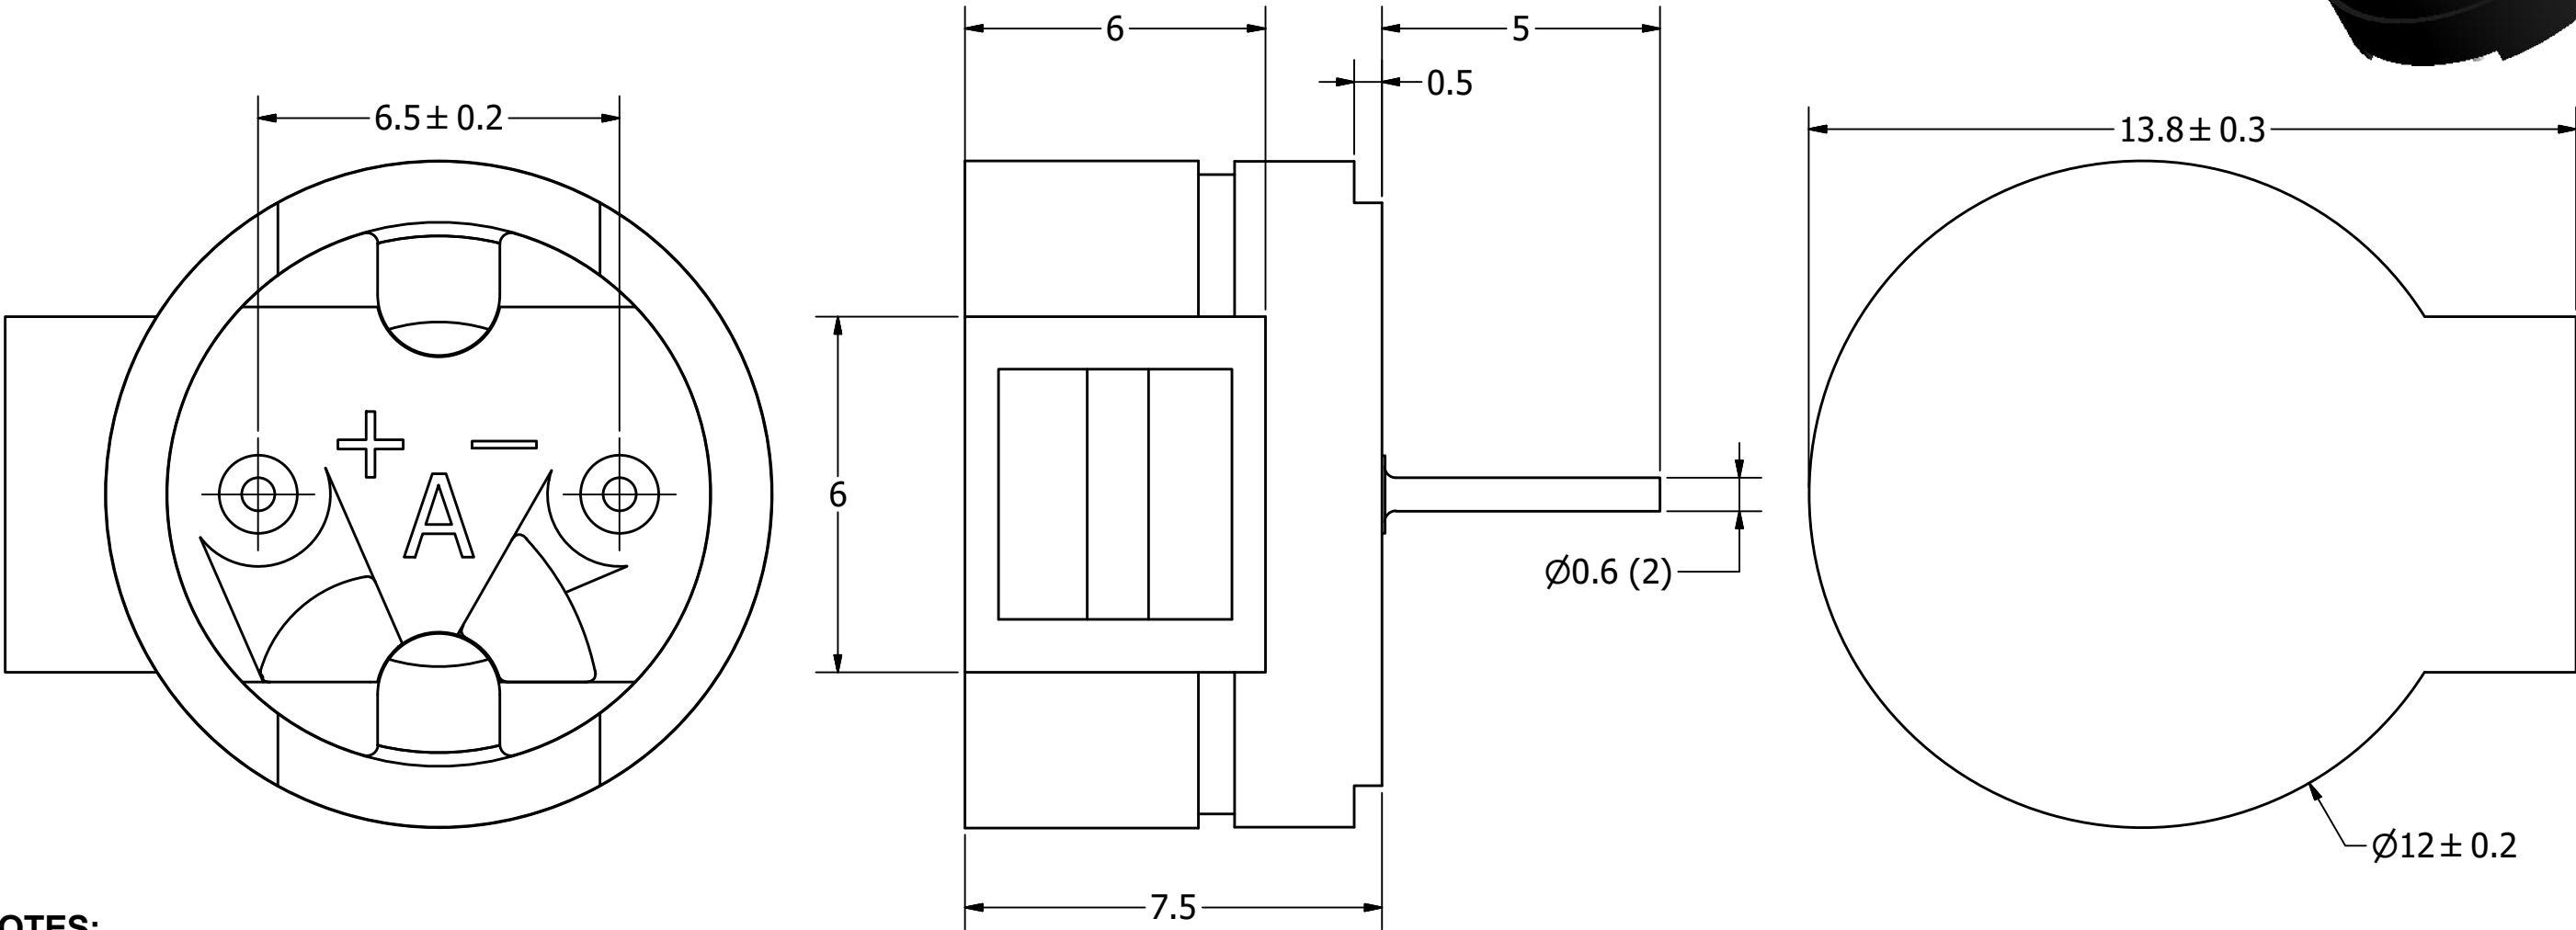


SPECIFICATIONS		
PARAMETERS	VALUES	UNIT
RATED VOLTAGE	1.5	Vpk
OPERATING VOLTAGE RANGE	1 ~ 3	Vpk
RATED CURRENT (MAX)	70	mA
COIL RESISTANCE	6.5 ± 1	OHM
MINIMUM SPL @ 10 CM	80	dBA
RESONANT FREQUENCY	2,048 ± 500	Hz
OPERATING TEMPERATURE	-30 ~ +70	°C
STORAGE TEMPERATURE	-40 ~ +85	°C
HOUSING MATERIAL	MPPO	-
TERMINAL MATERIAL	Sn PLATED COPPER	-
WEIGHT	2	grams

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PUI AUDIO, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PUI AUDIO, INC. IS PROHIBITED.


©2010, PUI AUDIO Inc.

REVISION HISTORY			
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	11/02/2005	
A	REVISED SOUND HOLE DIMENSION	4/10/2008	B.R.
B	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	4/10/2008	B.R.
C	REVISED TEMPERATURE RATINGS, DIMENSIONS	2/26/2020	M.L.

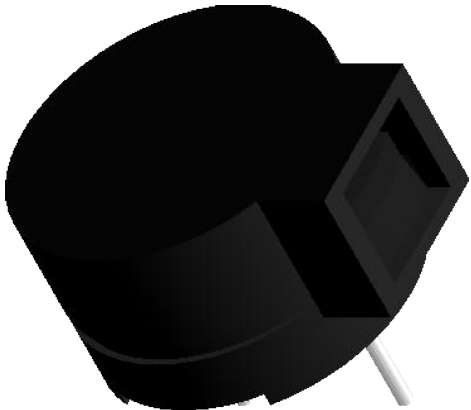

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
3. THIS PART IS RoHS 2015/863/EU COMPLIANT.

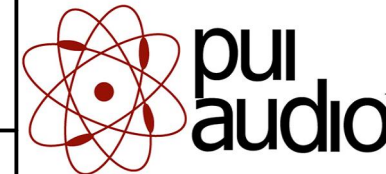UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.	SIZE	Designed by	Date	Checked by	Date	Approved by	Date	Drawn Date	
		J.A.F.	11/2/2005	B.R.	11/2/2005	E.P.	11/2/2005	4/10/2008	
	A3	 pui audio ™ inc			AT-1420-ST-R				
					Transducer (Electro-Mech)		Edition	Sheet	
AT-1420-ST-R.idw							-	1 / 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[PUI Audio:](#)

[AT-1420-ST-R](#)