


Description: 5GHz WiFi SMT Antenna

# Series: Embedded Antenna

PART NUMBER: W3713

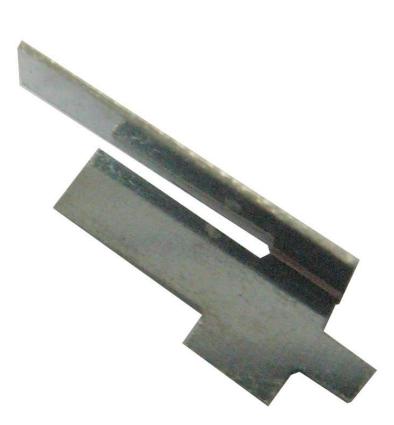

## **Features:**

- Frequency: 4.9-6GHz
- Gain: 4.5dBi
- Size: 10.5 x 3.2 x 2.4 mm
- SMT compatible
- Packing: Tape&Reel
- RoHS compliant
- Mirror image pair for this antenna is W3714


# **Applications:**

- WiFi, ISM 5GHz
- DSRC 5.925GHz
- Tablets, Notebooks
- IoT and M2M devices
- Portable Electronics
- Security, Transportation

#### All dimensions are in mm / inches

#### Issue: 1812

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



For more information: Pulse Worldwide Headquarters

12220 World Trade Drive San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34<sup>th</sup> St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4<sup>th</sup> Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998





Description: 5GHz WiFi SMT Antenna

Series: Embedded Antenna

PART NUMBER: W3713

## **ELECTRICAL SPECIFICATIONS**

Frequency	4.9-6GHz
Nominal Impedance	50Ω
VSWR	2:1
Peak Gain	4.5dBi +/- 1 dB
Radiation Pattern	Omni
Polarization:	Linear
Power withstanding	5W

Issue: 1812 In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION



2



Series: Embedded Antenna

Description: 5GHz WiFi SMT Antenna

PART NUMBER: W3713

# MECHANICAL SPECIFICATION:MaterialPhosphor bronzeThickness0.2mmWeight0.1gOverall Length10.5(0.41)mm(inch)Fixing systemSMTSMT

## **ENVIRONMENTAL SPECIFICATIONS**

Operating temperature

-40/+85 °C

Issue: 1812

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



3





Description: 5GHz WiFi SMT Antenna

Series: Embedded Antenna

PART NUMBER: W3713

#### **MECHANICAL DRAWING**

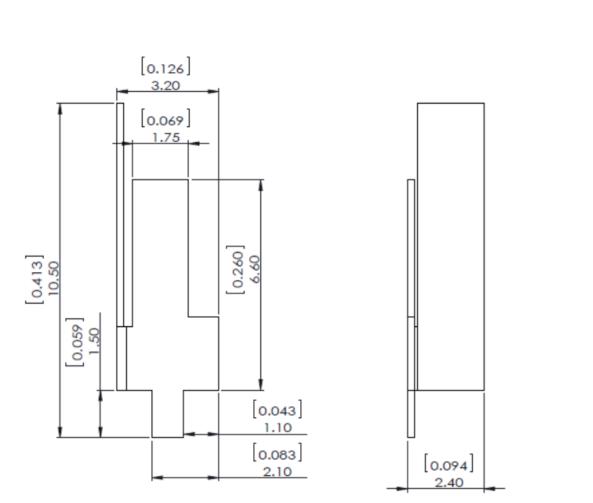



#### Issue: 1812

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



4




Description: 5GHz WiFi SMT Antenna

Series: Embedded Antenna


PART NUMBER: W3713

## **OTHER SPECIFICATIONS**

PCB LAYOUT: 1, PCB material, FR4, size, 76.2X76.2X0.8mm

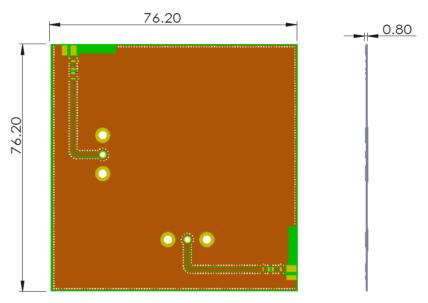

2, Clearance area (Top)

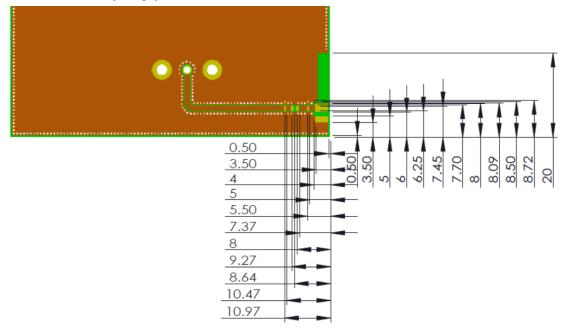

#### Issue: 1812

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



5




Description: 5GHz WiFi SMT Antenna

Series: Embedded Antenna


PART NUMBER: W3713

## **OTHER SPECIFICATIONS**

3, Clearance area (Bottom)

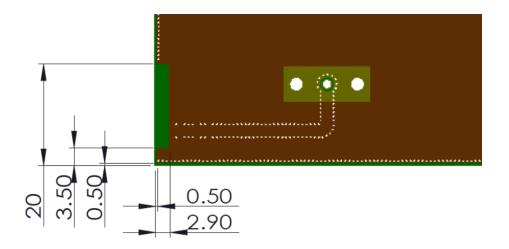

# 4, PCB Features

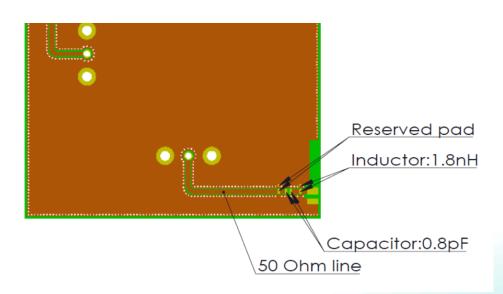

#### Issue: 1812

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



6




Series: Embedded Antenna

Description: 5GHz WiFi SMT Antenna

PART NUMBER: W3713

## **OTHER SPECIFICATIONS**

3, Antenna on test PCB

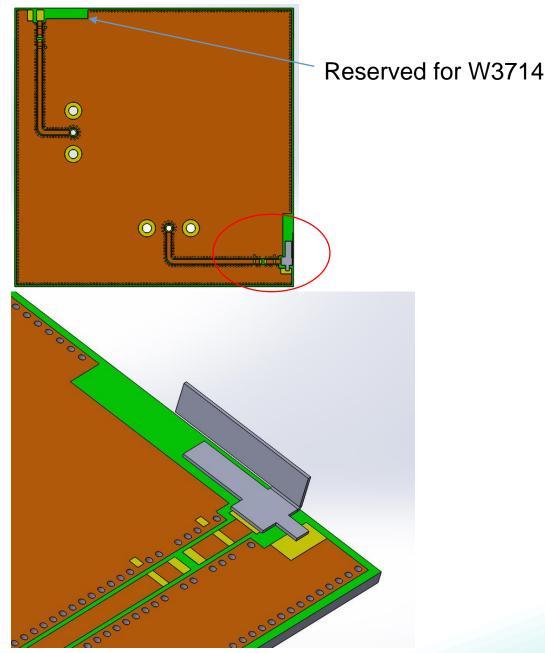

#### Issue: 1812

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION





Description: 5GHz WiFi SMT Antenna

# Series: Embedded Antenna

PART NUMBER: W3713

#### **OTHER SPECIFICATIONS**

# **Recommendation for reflow soldering process**

Printing stencil thickness 0,15 - 0,25 mm is recommended for the solder paste. The maximum soldering temperature should not exceed 260°C. The temperature profile recommendations for reflow soldering process is presented in the Figures 1 and 2. The reflow profile presented in figure 1 describes minimum reflow temperatures. The reflow profile presented in figure 2 describes maximum reflow temperatures. located at the center of the coverage area.

	Method of heat transfer	Controlled hot air convection
1	Average temperature gradient in preheating	2.5 °C/s
2	Soak time	2-3 minutes
3	Max temperature gradient in reflow	3 °C/s
4	Time above 217 °C	Max 30 sec
5	Peak temperature in reflow	230 °C for 10 seconds
6	Temperature gradient in cooling	Max -5 °C/s

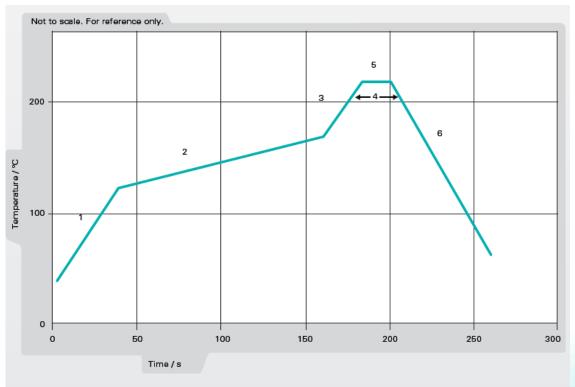


Figure 1. Minimum temperature profile recommendation for reflow soldering process

#### Issue: 1812

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



8



Description: 5GHz WiFi SMT Antenna

# Series: Embedded Antenna

PART NUMBER: W3713

## **OTHER SPECIFICATIONS**

	Method of heat transfer	Controlled hot air convection
1	Average temperature gradient in preheating	2.5 °C/s
2	Soak time	2-3 minutes
3	Max temperature gradient in reflow	3 °C/s
4	Time above 217 °C	Max 60 sec
5	Time above 230 °C	Max 50 sec
6	Time above 250 °C	Max 10 sec
7	Peak temperature in reflow	260 °C for 5 seconds
8	Temperature gradient in cooling	Max -5 °C/s

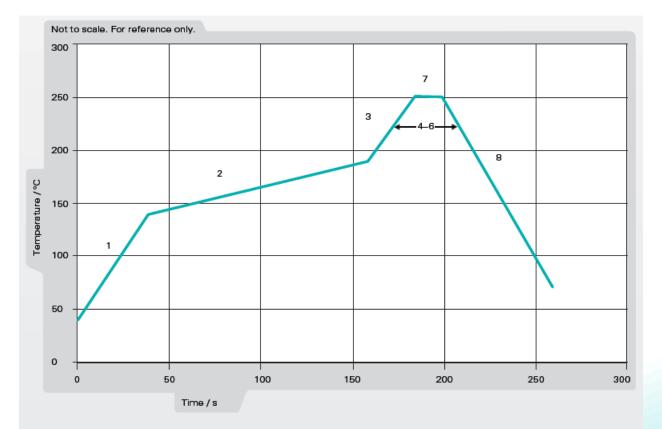


Figure 2. Maximum temperature profile recommendation for reflow soldering process

#### Issue: 1812

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION




9



Description: 5GHz WiFi SMT Antenna

## Series: Embedded Antenna

PART NUMBER: W3713

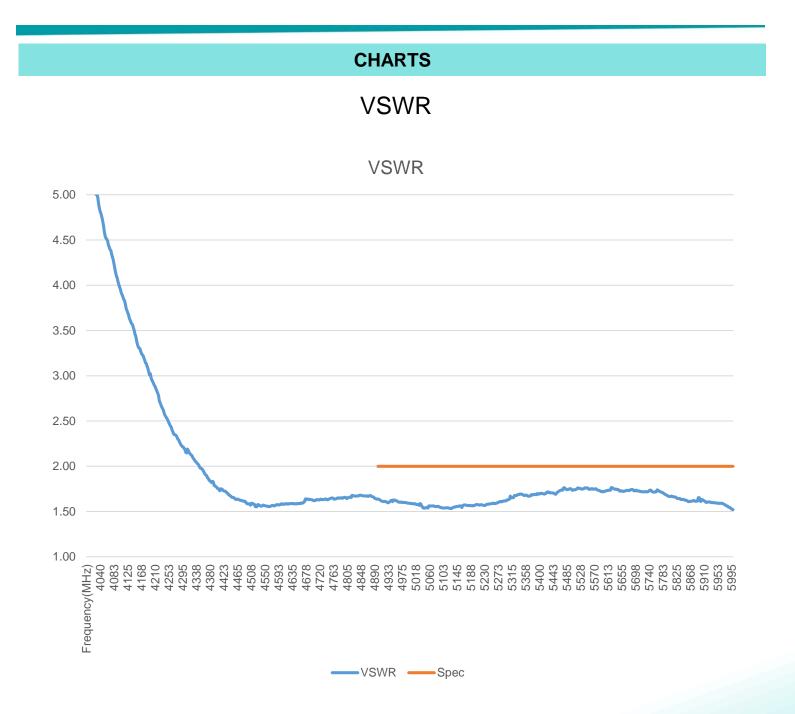

Issue: 1812

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

ROHS 10




Description: 5GHz WiFi SMT Antenna

# Series: Embedded Antenna

PART NUMBER: W3713

# CHARTS

# Efficiency(%)

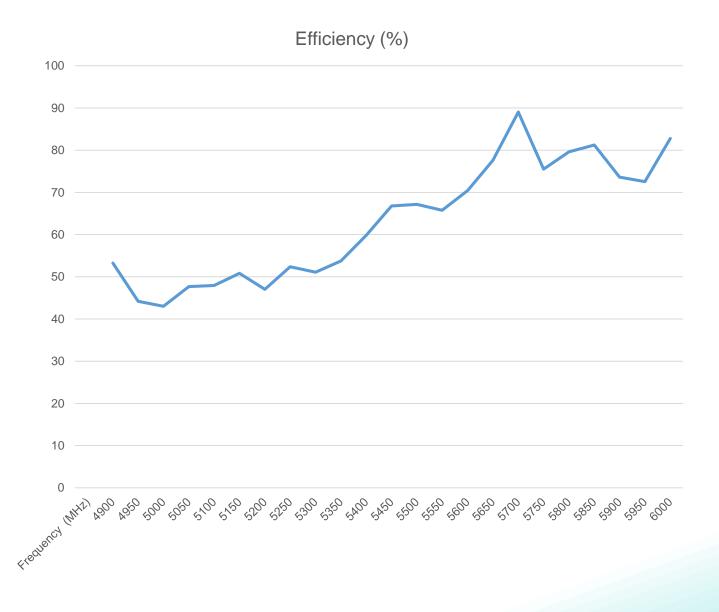

#### Issue: 1812

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

ROHS 11



Description: 5GHz WiFi SMT Antenna

# Series: Embedded Antenna

PART NUMBER: W3713

## CHARTS

# Peak Gain (dBi)



#### Issue: 1812

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION






Description: 5GHz WiFi SMT Antenna

# Series: Embedded Antenna

PART NUMBER: W3713

#### CHARTS

# Free Space Radiation Pattern

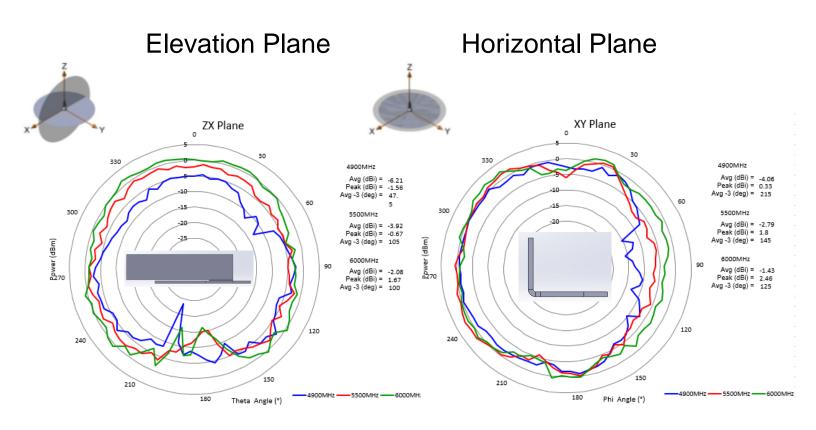

#### Issue: 1812

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION





Series: Embedded Antenna

Description: 5GHz WiFi SMT Antenna

PART NUMBER: W3713

#### PACKAGING

Tape and Reel packing: 3000PCS/Tape and Reel 6000PCS/ Carton box

Tape Width : 24mm Tape Material : Polystyrene





#### Issue: 1812

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse: W3713